


 CNP 南方泵业	Product Information NIS50-32-125G/1.5	Manufacturer	Nanfang Pump Industry Co.,Ltd (CNP)
		Address	Hangzhou, Zhejiang, China
		Contact	86-571-88637351
		Date	2025/06/15
Project Name		Client Name	
		Client Addr.	
Item NO		Contacts	Golsa
		Contact	


Part NO.	1100333864
Product Picture: (Note: Images may not be the same as the product)	Note
	Non-self-priming single-stage horizontal end-suction centrifugal pump with axial inlet and radial outlet,using pull-back structure, no need to dismantle the pump body and pipeline for maintenance, using direct connection and extended shaft structure, the pump is small in size, compact in structure and simple in installation.
Technology	
Pump rotator speed	2900
Material	
Pump body	HT200
Impeller	HT200
Rubber code	NBR
Material Code	H
Installation	
Maximum Operation Pressure	16bar
Medium	
Medium Temperature	-15°C~110°C
Structure dimension	
Inlet & outlet size types	DN
Inlet Bore	50
Outlet Diameter	32
Rotation Direction	Anti-clockwise rotation viewing from inlet
Explosed view	NIS exploded view
Motor	
Number of Motor Phase	Three Phase
Protection Class	IP55
Insulation Class	F
Motor Power(kW)	1.5KW
Power Frequency(Hz)	50HZ
Rated Voltage (V)	220/380V
Rated Current (A)	5.6/3.2
Energy Efficiency Level	IE3
Seal	
Mechanical Seal	NISO-33/BSE4
Others	
Weight (kg)	59

	Performance Curve NIS50-32-125G/1.5	Manufacturer	Nanfang Pump Industry Co.,Ltd (CNP)
		Address	Hangzhou, Zhejiang, China
		Contact	86-571-88637351
		Date	2025/06/15
Project Name		Client Name	
Item NO		Client Addr.	
		Contacts	Golsa
		Contact	

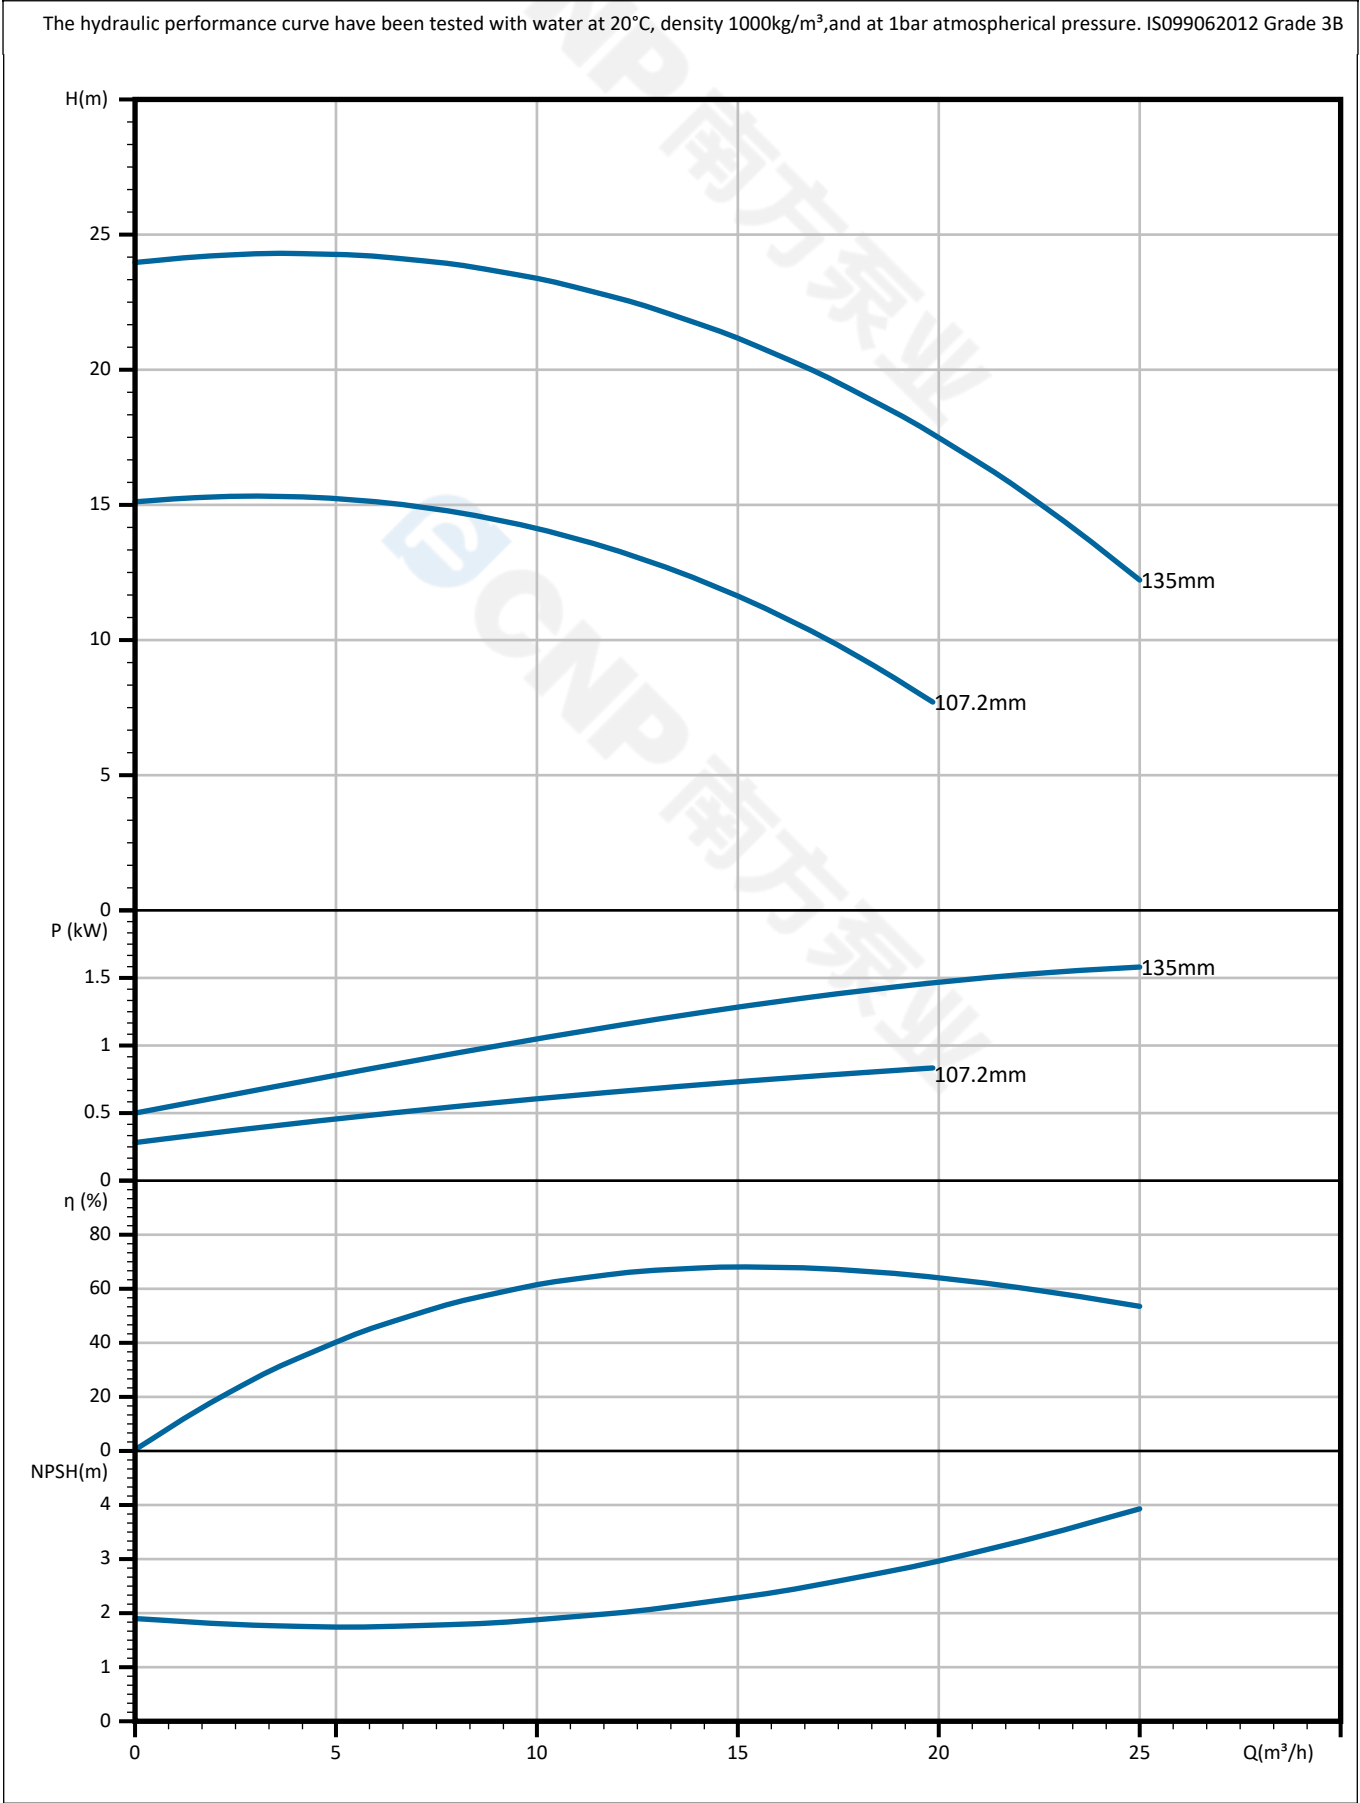

 CNP 南方泵业	Pump Technical Parameters NIS50-32-125G/1.5	Manufacturer	Nanfang Pump Industry Co.,Ltd (CNP)
		Address	Hangzhou, Zhejiang, China
		Contact	86-571-88637351
		Date	2025/06/15
Project Name		Client Name	
		Client Addr.	
Item NO		Contacts	Golsa
		Contact	

Rated parameters	
Pump model	NIS50-32-125G/1.5
Part NO.	1100333864
Rated flow	12.5 m³/h
Rated head	22 m
Rated efficiency	64 (%)
Power (kW)	1.171 kW
NPSHr (m)	2
Speed (rpm)	2900
Max impeller diameter (mm)	135
Medium	
Pumped medium	water
Working temperature (°C)	20
Medium density (kg/m³)	1000
Viscosity (mm²/s)	1

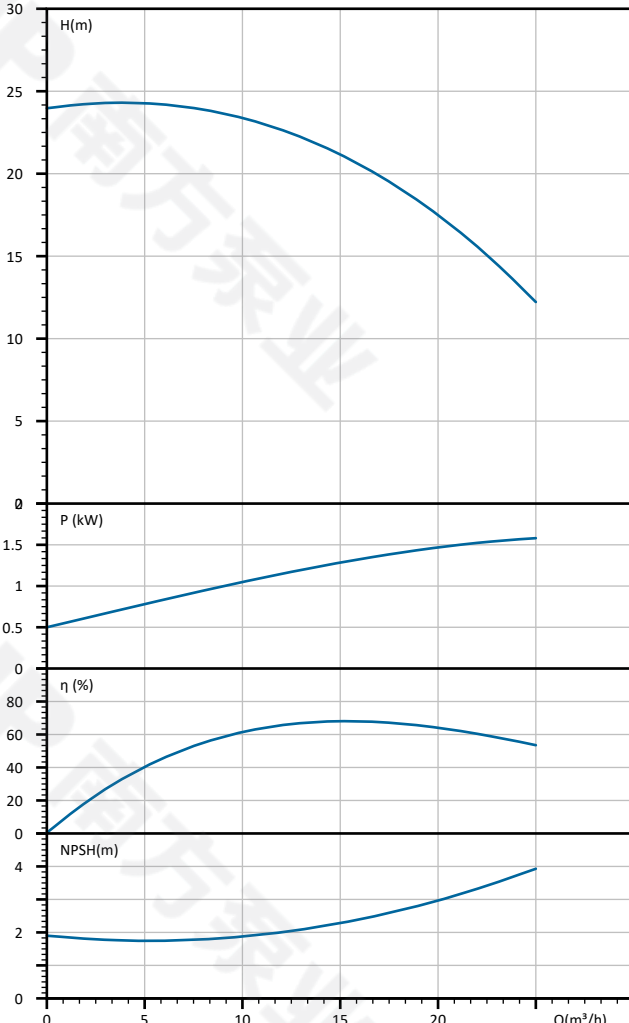


Q (m³/h)	H (m)
0	24.0
5	24.2
10	23.5
15	21.5
20	18.0
25	12.5

Q (m³/h)	P (kW)
0	0.5
5	0.8
10	1.1
15	1.3
20	1.5
25	1.6

Q (m³/h)	η (%)
0	0
5	40
10	65
15	70
20	65
25	55

Q (m³/h)	NPSH (m)
0	2.0
5	1.8
10	2.0
15	2.5
20	3.0
25	4.0

	Explosed view NIS50-32-125G/1.5	Manufacturer	Nanfeng Pump Industry Co.,Ltd (CNP)
		Address	Hangzhou, Zhejiang, China
		Contact	86-571-88637351
		Date	2025/06/15
Project Name		Client Name	
Item NO		Client Addr.	
		Contacts	Golsa
		Contact	

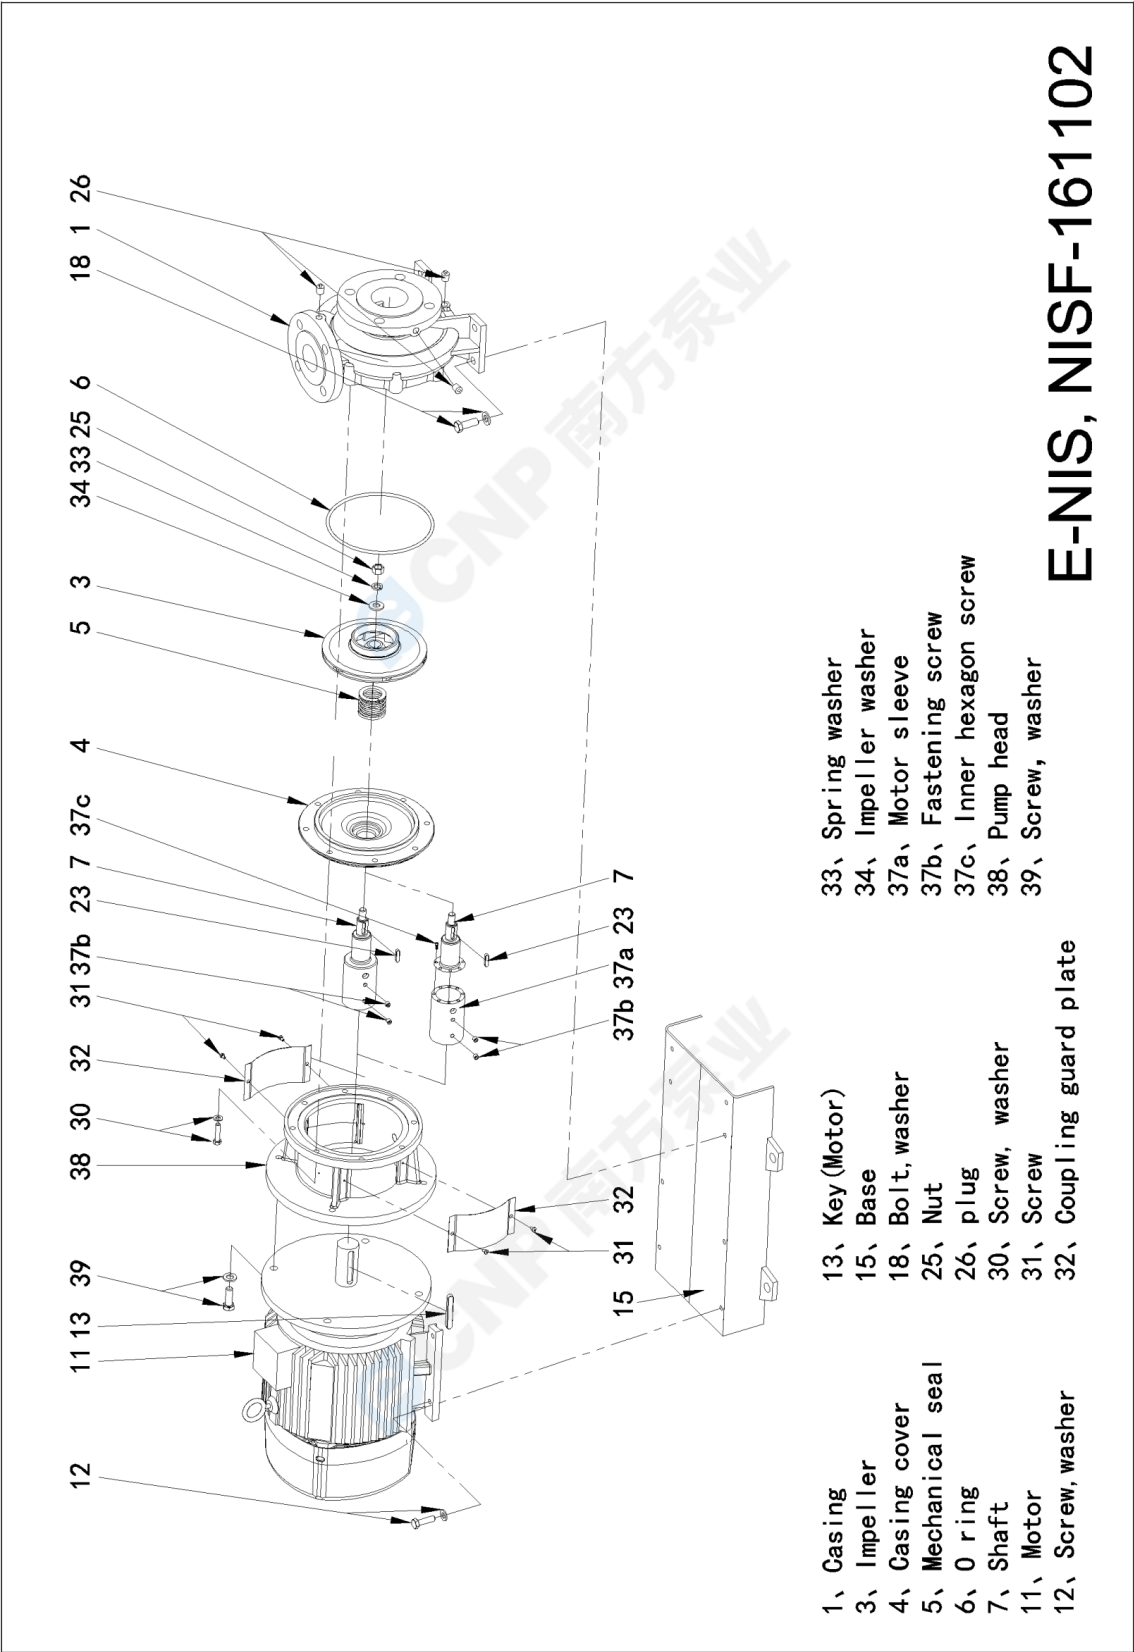

 CNP 南方泵业	Physical picture NIS50-32-125G/1.5	Manufacturer	Nanfeng Pump Industry Co.,Ltd (CNP)
		Address	Hangzhou, Zhejiang, China
		Contact	86-571-88637351
		Date	2025/06/15
		Client Name	
Project Name		Client Addr.	
Item NO		Contacts	Golsa
		Contact	



 CNP 南方泵业	Order Data NIS50-32-125G/1.5	Manufacturer	Nanfang Pump Industry Co.,Ltd (CNP)
		Address	Hangzhou, Zhejiang, China
		Contact	86-571-88637351
		Date	2025/06/15
Project Name		Client Name	
		Client Addr.	
Item NO		Contacts	Golsa
		Contact	

Pump model NIS50-32-125G/1.5
Part NO. 1100333864
Product price
Quantity 1
Total price

Inquiry notes