


	Product Information CDLK15-30/3	Manufacturer	Nanfang Pump Industry Co.,Ltd (CNP)
		Address	Hangzhou, Zhejiang, China
		Contact	86-571-88637351
		Date	2025/02/04
		Client Name	dieselpumpasia
Project Name		Client Addr.	
Item NO		Contacts	dpa
		Contact	


Part NO.	1100154542
Product Picture: (Note: Images may not be the same as the product)	Note
	Non-self-priming vertical immersion multistage centrifugal pump, the motor shaft is directly connected with the pump shaft through the coupling, and the impeller guide vane is made of stainless steel plate stamping and welding, in order to meet the installation depth of the sink or container, the cavity can be installed to change the depth of the pump immersion. Compact structure, easy maintenance, selectable installation depth, easy installation.
Nameplate parameters Flow 15 m³/h Head 34 m Efficiency 68 % Speed 2900 rpm Number of stages 3 Technology Pump rotator speed 2900 Nameplate standards CE Material Impeller 304 Rubber code P Material Code S Medium Medium Temperature normal temperature -15°C+70°C Medium Temperature high temperature -15°C+105°C Maximum Environment Temperature 40°C Motor Number of Motor Phase Three Phase Protection Class IP55 Insulation Class F Motor Power(kW) 3.0KW Power Frequency(Hz) 50HZ Rated Voltage (V) 220/380V Rated Current (A) 10.4/6.0 Energy Efficiency Level IE3 Seal Mechanical Seal CDL-16/WSF14 Others Weight (kg) 47 Structure dimension Expolded view CDLK(F)8,15,16,20exploded view	

	Performance Curve CDLK15-30/3	Manufacturer	Nanfang Pump Industry Co.,Ltd (CNP)
		Address	Hangzhou, Zhejiang, China
		Contact	86-571-88637351
		Date	2025/02/04
Project Name		Client Name	dieselpumpasia
Item NO		Client Addr.	
		Contacts	dpa
		Contact	

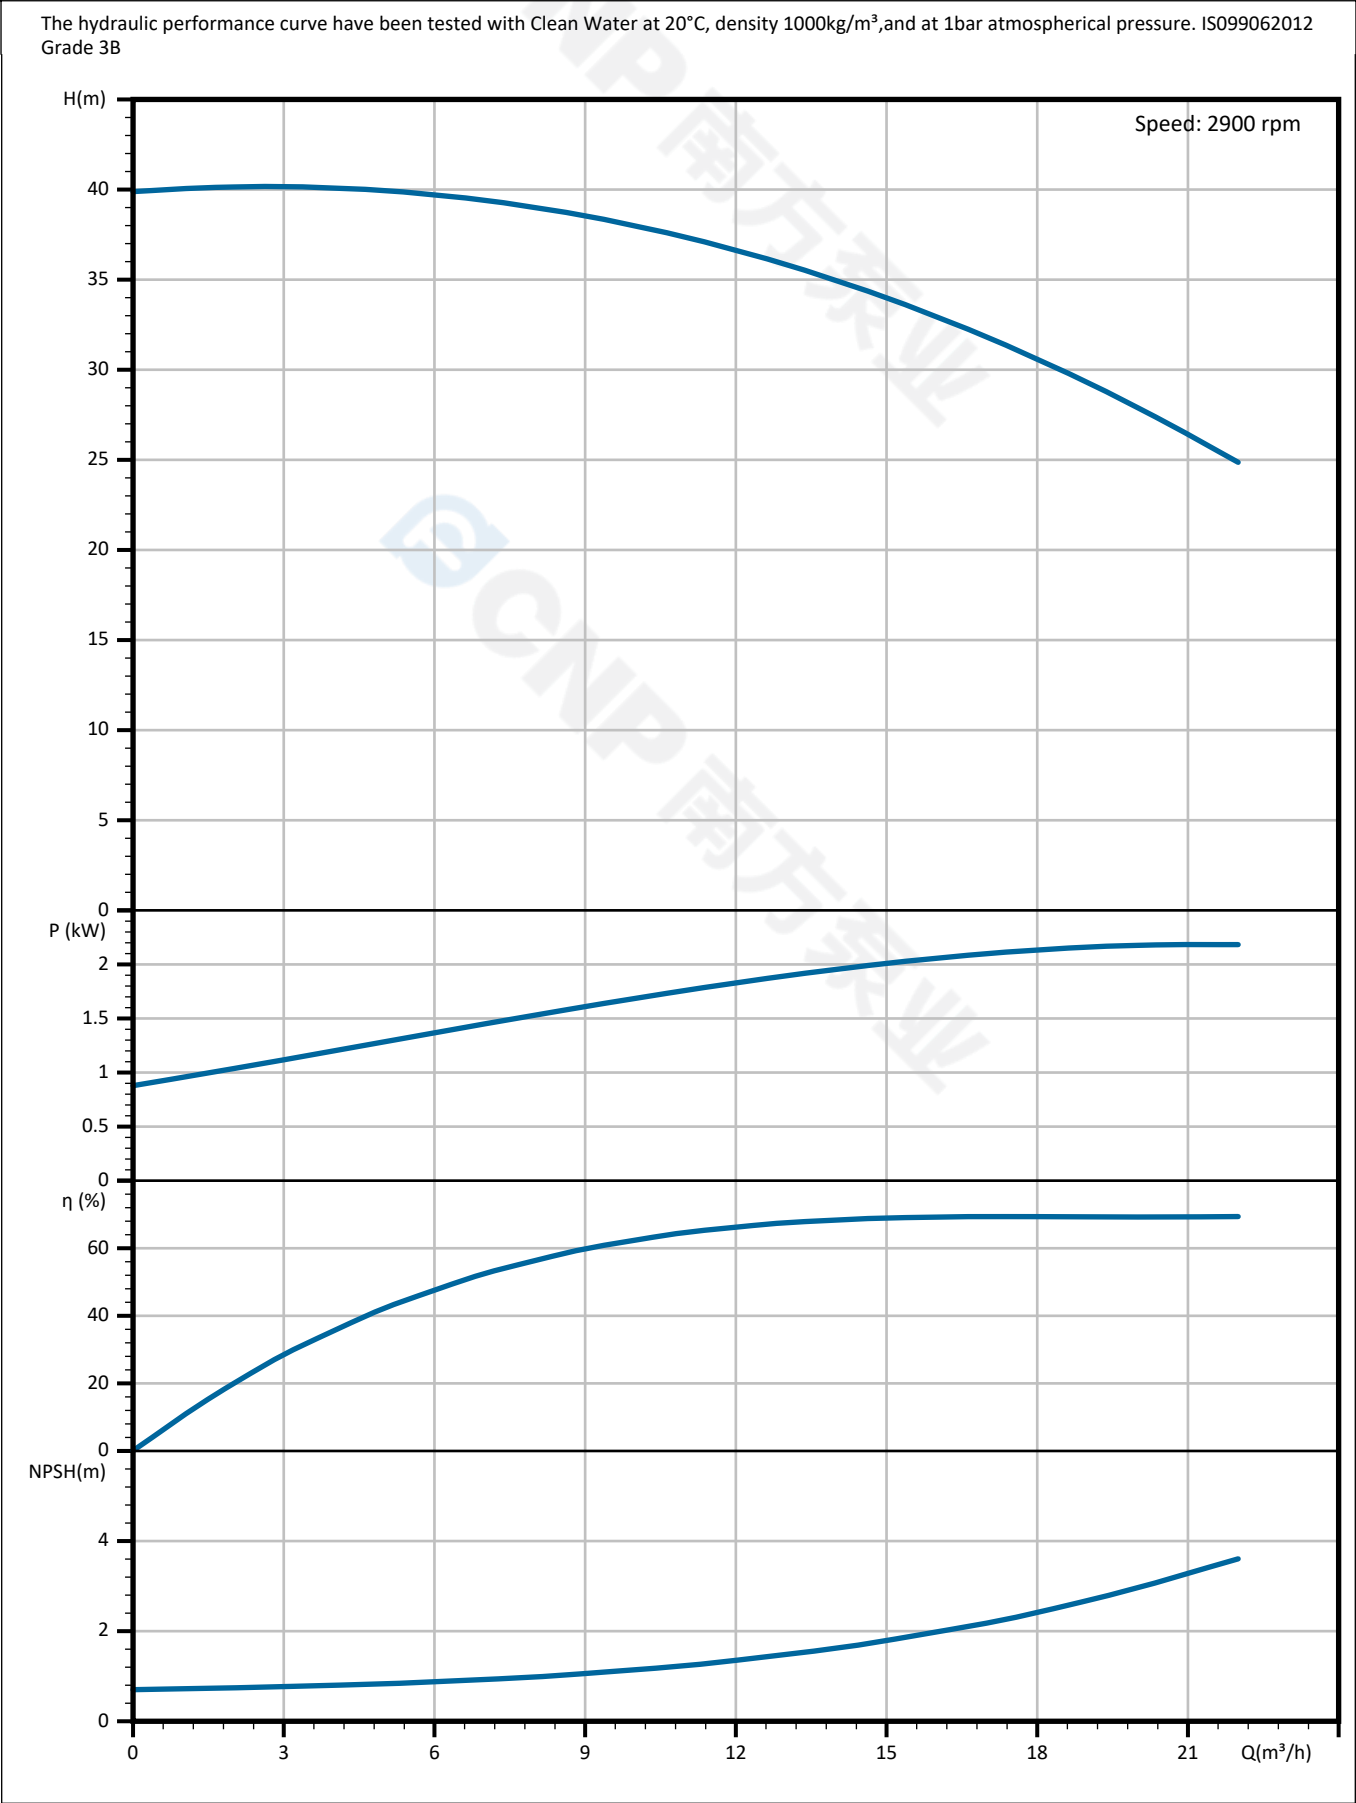


 CNP 南方泵业	Pump Technical Parameters CDLK15-30/3	Manufacturer	Nanfang Pump Industry Co.,Ltd (CNP)
		Address	Hangzhou, Zhejiang, China
		Contact	86-571-88637351
		Date	2025/02/04
Project Name		Client Name	dieselpumpasia
		Client Addr.	
Item NO		Contacts	dpa
		Contact	

Rated parameters	
Pump model	CDLK15-30/3
Part NO.	1100154542
Rated flow	15 m³/h
Rated head	34 m
Rated efficiency	68 (%)
Power (kW)	2.04 kW
NPSHr (m)	2
Speed (rpm)	2900
Max impeller diameter (mm)	105
Medium	
Pumped medium	Clean Water
Working temperature (°C)	20
Medium density (kg/m³)	1000
Viscosity (mm²/s)	1

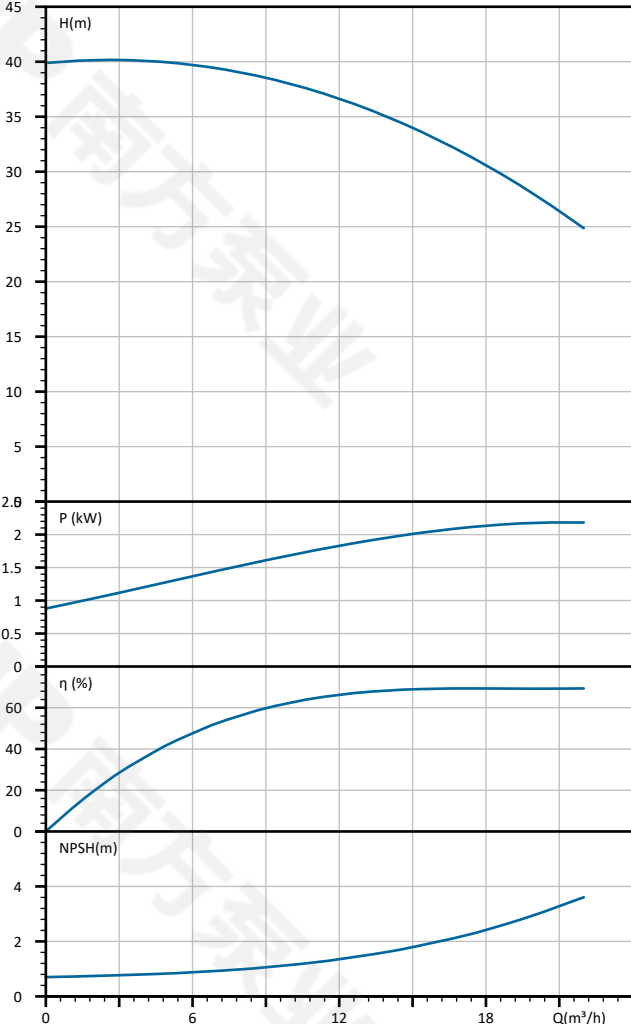

Flow (Q) [m³/h]	Head (H) [m]	Power (P) [kW]	Efficiency (η) [%]	NPSHr [m]
0	40	1.0	0	0.5
6	39	1.2	55	0.8
12	36	1.6	65	1.2
18	30	2.0	68	2.2
24	25	2.2	68	3.5

 CNP 南方泵业	Dimension Drawing CDLK15-30/3	Manufacturer	Nanfeng Pump Industry Co.,Ltd (CNP)
		Address	Hangzhou, Zhejiang, China
		Contact	86-571-88637351
		Date	2025/02/04
Project Name		Client Name	dieselpumpasia
Item NO		Client Addr.	
		Contacts	dpa
		Contact	

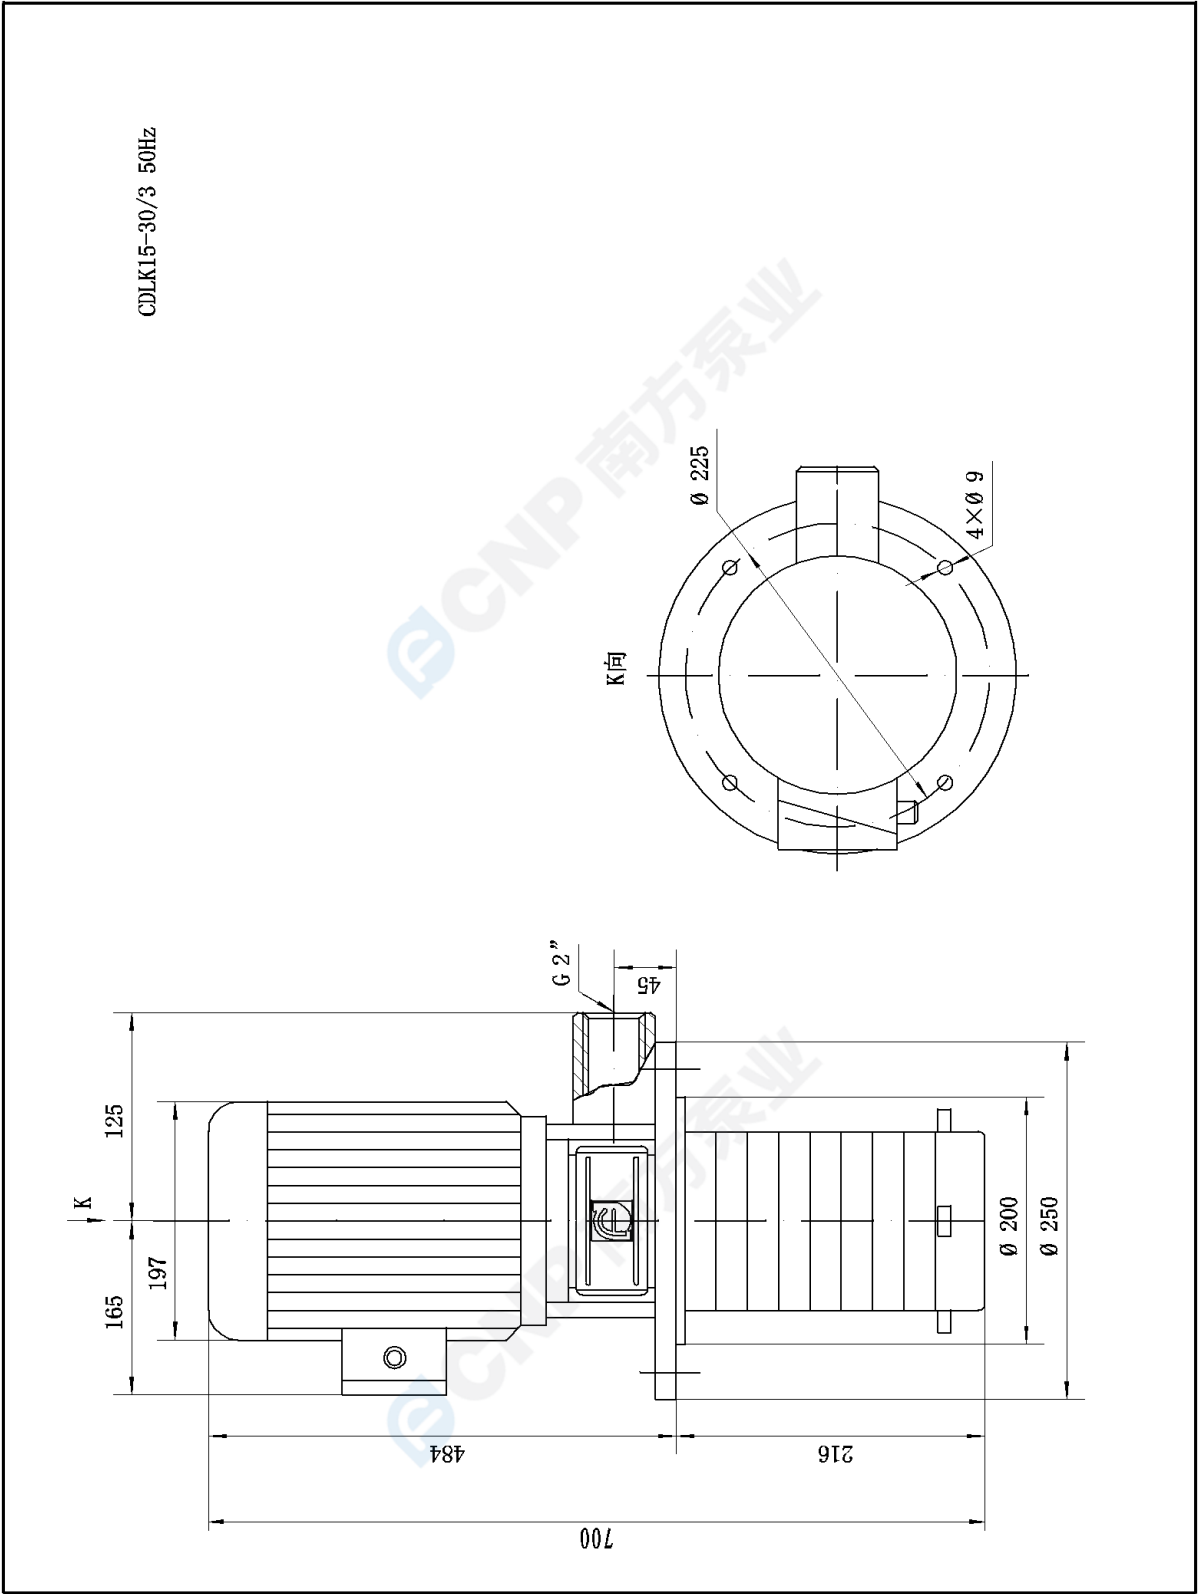

 CNP 南方泵业	Physical picture CDLK15-30/3	Manufacturer	Nanfang Pump Industry Co.,Ltd (CNP)
		Address	Hangzhou, Zhejiang, China
		Contact	86-571-88637351
		Date	2025/02/04
		Client Name	dieselpumpasia
Project Name		Client Addr.	
Item NO		Contacts	dpa
		Contact	



 CNP 南方泵业	Order Data CDLK15-30/3	Manufacturer	Nanfang Pump Industry Co.,Ltd (CNP)
		Address	Hangzhou, Zhejiang, China
		Contact	86-571-88637351
		Date	2025/02/04
		Client Name	dieselpumpasia
Project Name		Client Addr.	
Item NO		Contacts	dpa
		Contact	

Pump model CDLK15-30/3

Part NO. 1100154542

Product price

Quantity 1

Total price

Inquiry notes