

	Product Information WLT125-5/4	Manufacturer	CNP
		Address	Yuhang District, Hangzhou, Zhejiang,
		Contact	86-571-88637351
		Date	2022/03/08
		Client Name	DPA
Project Name		Client Addr.	
Item NO		Contacts	Alireza
		Contact	

Part NO.	1100050117
----------	------------

Product Picture	Note
	Non-self-priming, single stage, single suction, horizontal, axial suction and radical discharge. Motor is fixed with a baseplate, and the pump is easily to be installed for no support for pump body. Back-pull-out desiagn, easy to maintain. Pump shaft is the same one as motor shaft, small volume and light weight. The impeller and pump body are designed through excellent hydraulic calculation.The optimum working condition of pump is set according to market demand, high efficiency. The main parts like impellers and casings are made of stainless steel. Castings adopt resin sand casting process, bright and clean surface, good appearance, compact structure

Material

Impeller	304
Pump body	HT200
Rubber code	NBR
Material Code	S

Installation

Connection Code	F
Installation type	horizontal
Maximum Operation Pressure	6Bar

Medium

Liquid Temperature Range	-15~+100
--------------------------	----------

Structure dimension

Inlet & outlet size types	DN
Inlet Bore	125
Outlet Diameter	125
Rotation Direction	Anti-clockwise rotation viewing from inlet

Motor

Number of Motor Phase	Three Phase
Protection Class	IP55
Insulation Class	F
Motor Power	4
Power Frequency	50Hz
Rated Voltage (V)	380V

Seal


Mechanical Seal	TDS-28/BSP4
-----------------	-------------

Others

Weight (kg)	83
-------------	----


	Performance Curve WLT125-5/4	Manufacturer	CNP
		Address	Yuhang District, Hangzhou, Zhejiang,
		Contact	86-571-88637351
		Date	2022/03/08
Project Name		Client Name	DPA
		Client Addr.	
Item NO		Contacts	Alireza
		Contact	

The hydraulic performance curve have been tested with Clean Water at 20°C, density 1000kg/m³, and at 1bar atmospheric pressure. ISO99062012 Grade 3B

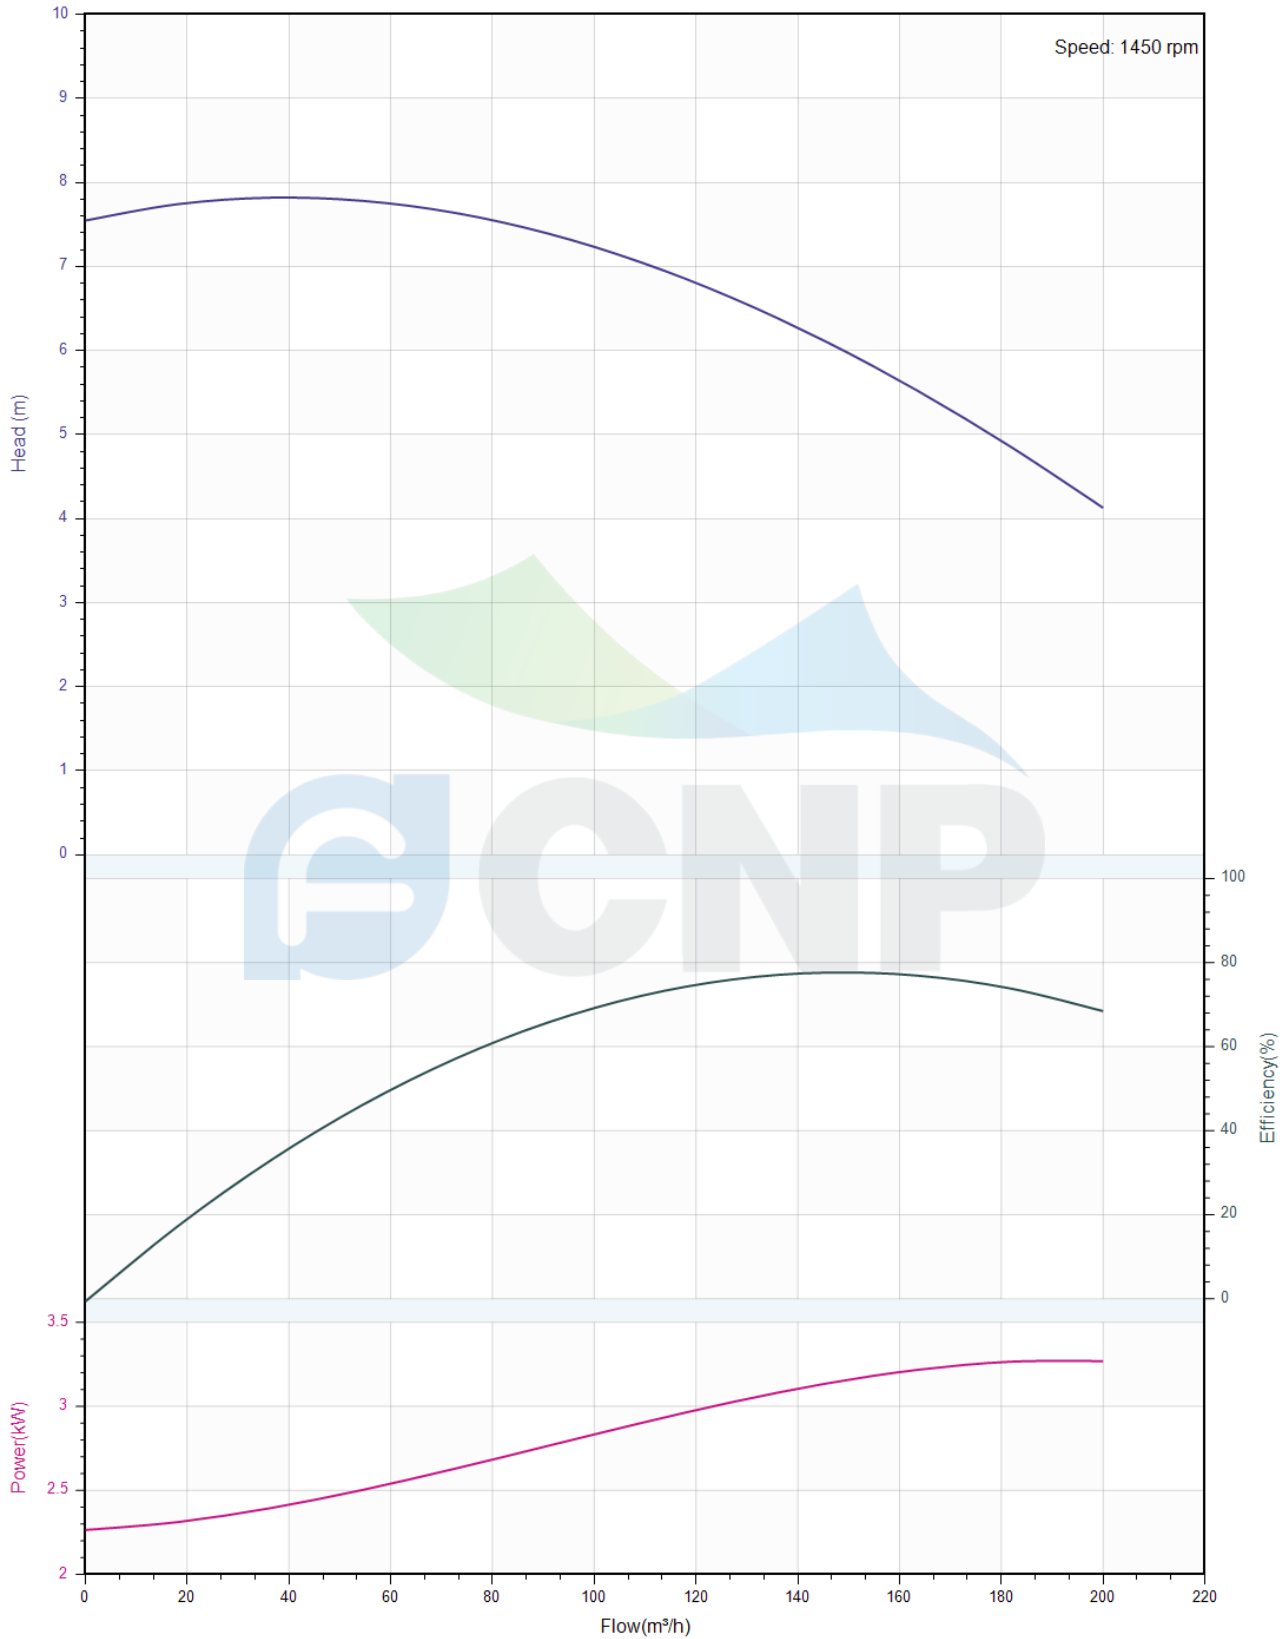


	Pump Technical Parameters WLT125-5/4	Manufacturer	CNP
		Address	Yuhang District, Hangzhou, Zhejiang,
		Contact	86-571-88637351
		Date	2022/03/08
Project Name		Client Name	DPA
Item NO		Client Addr.	
		Contacts	Alireza
		Contact	

Rated parameters	
Pump model	WLT125-5/4
Part NO.	1100050117
Rated flow (m ³ /h)	180
Rated head (m)	5
Rated efficiency (%)	74
Power (kW)	4
Speed (rpm)	1450
Max impeller diameter (mm)	177
Medium	
Pumped medium	Clean Water
Working temperature (°C)	20
Medium density (kg/m ³)	1000
Viscosity (mm ² /s)	1

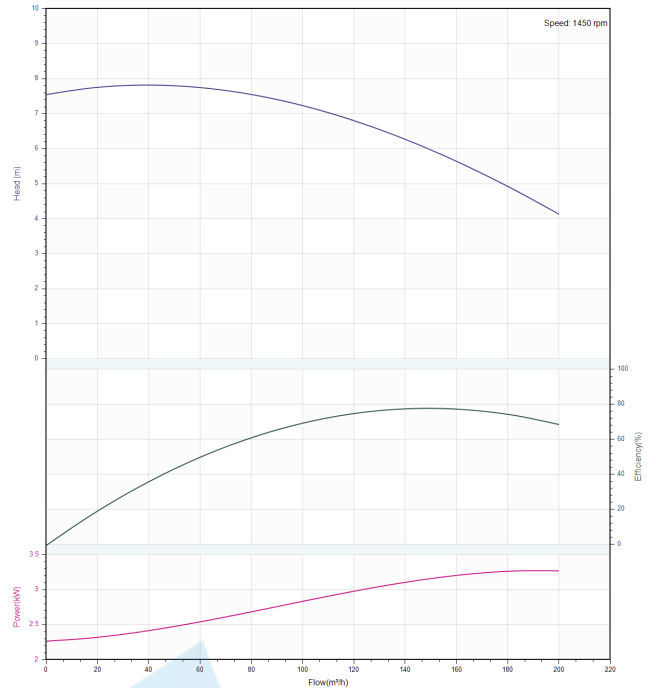


	Structure picture WLT125-5/4	Manufacturer	CNP
		Address	Yuhang District, Hangzhou, Zhejiang,
		Contact	86-571-88637351
		Date	2022/03/08
		Client Name	DPA
Project Name		Client Addr.	
Item NO		Contacts	Alireza
		Contact	

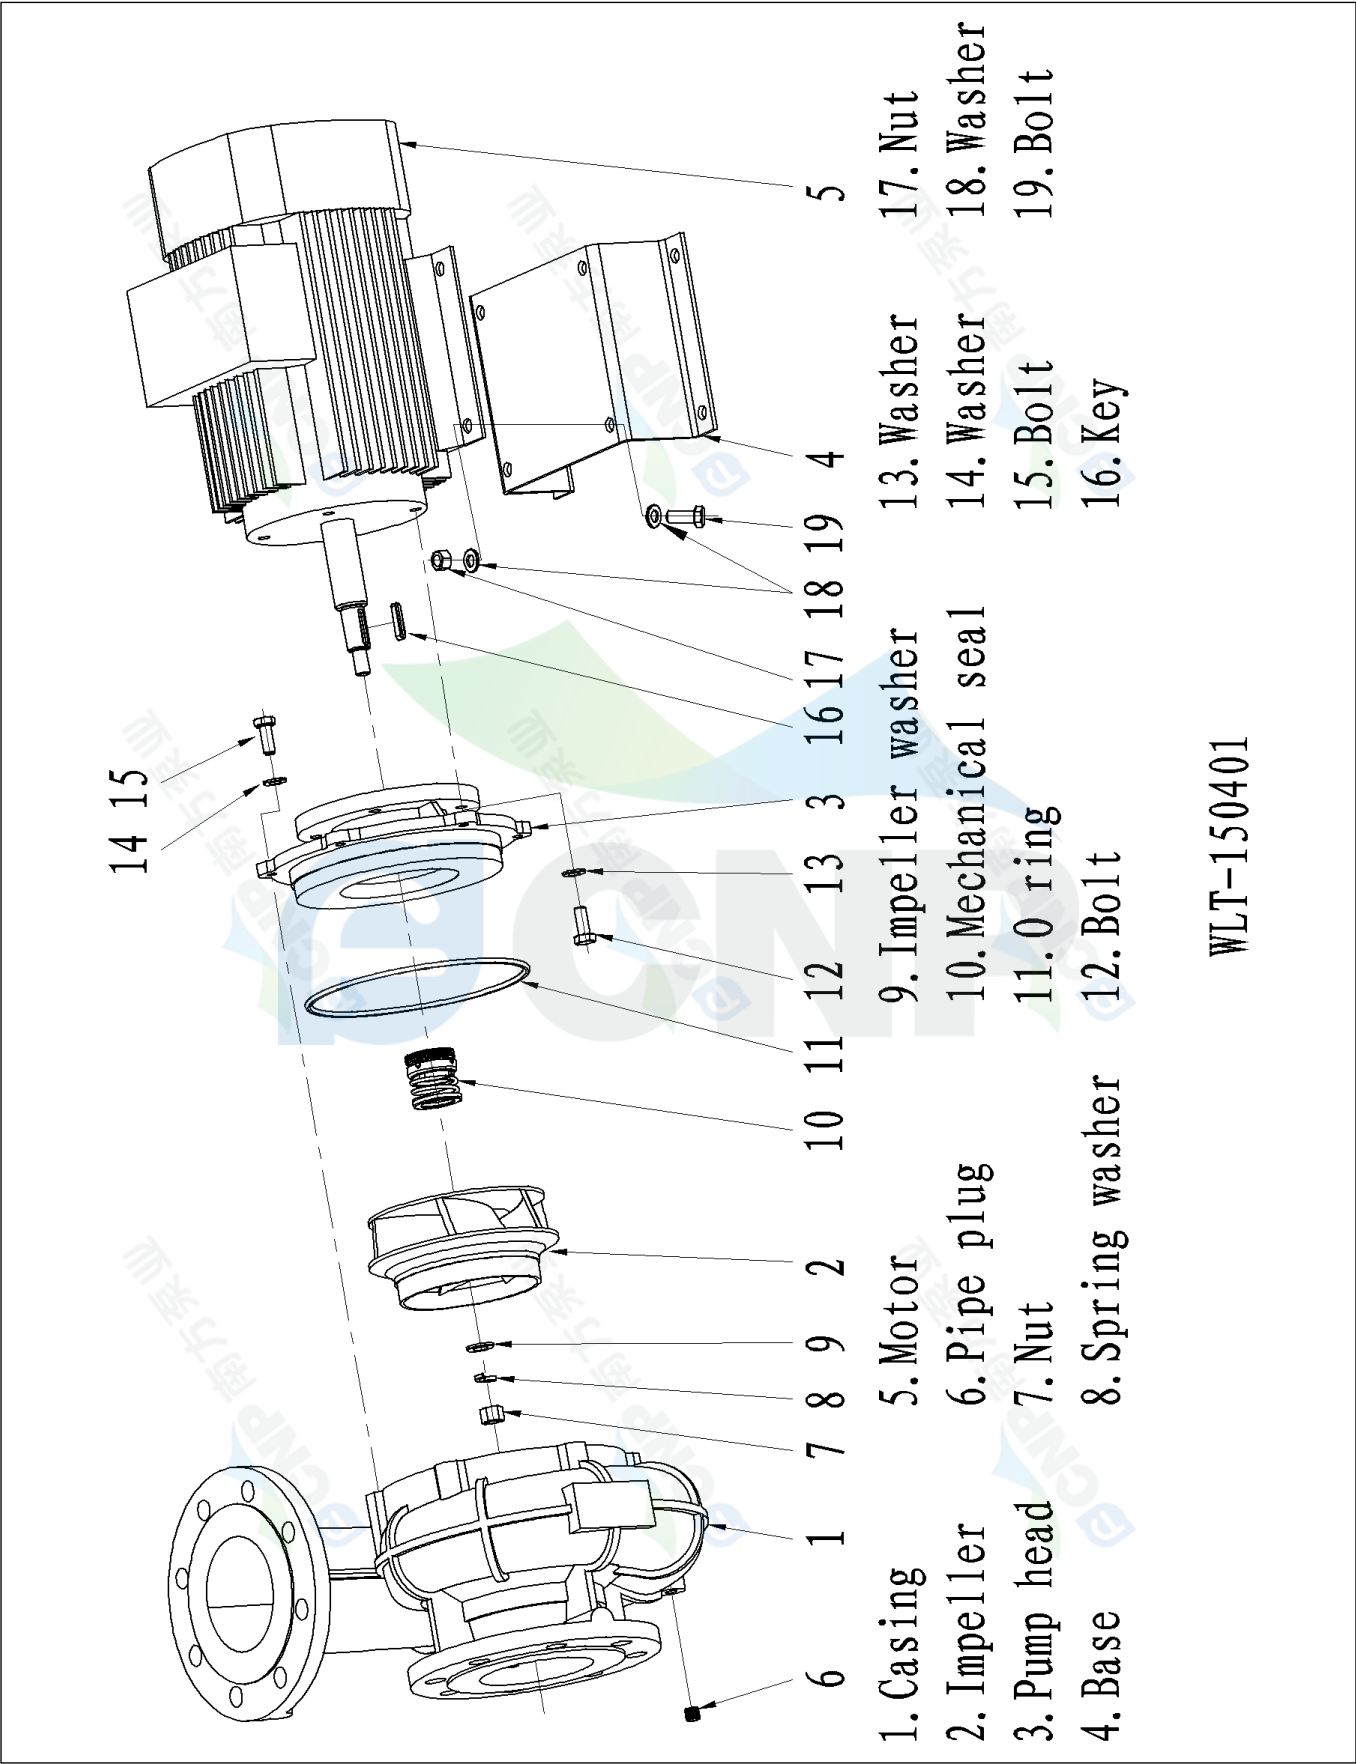

	Dimension Drawing WLT125-5/4	Manufacturer	CNP
		Address	Yuhang District, Hangzhou, Zhejiang,
		Contact	86-571-88637351
		Date	2022/03/08
Project Name		Client Name	DPA
Item NO		Client Addr.	
		Contacts	Alireza
		Contact	

WLT125-5/4

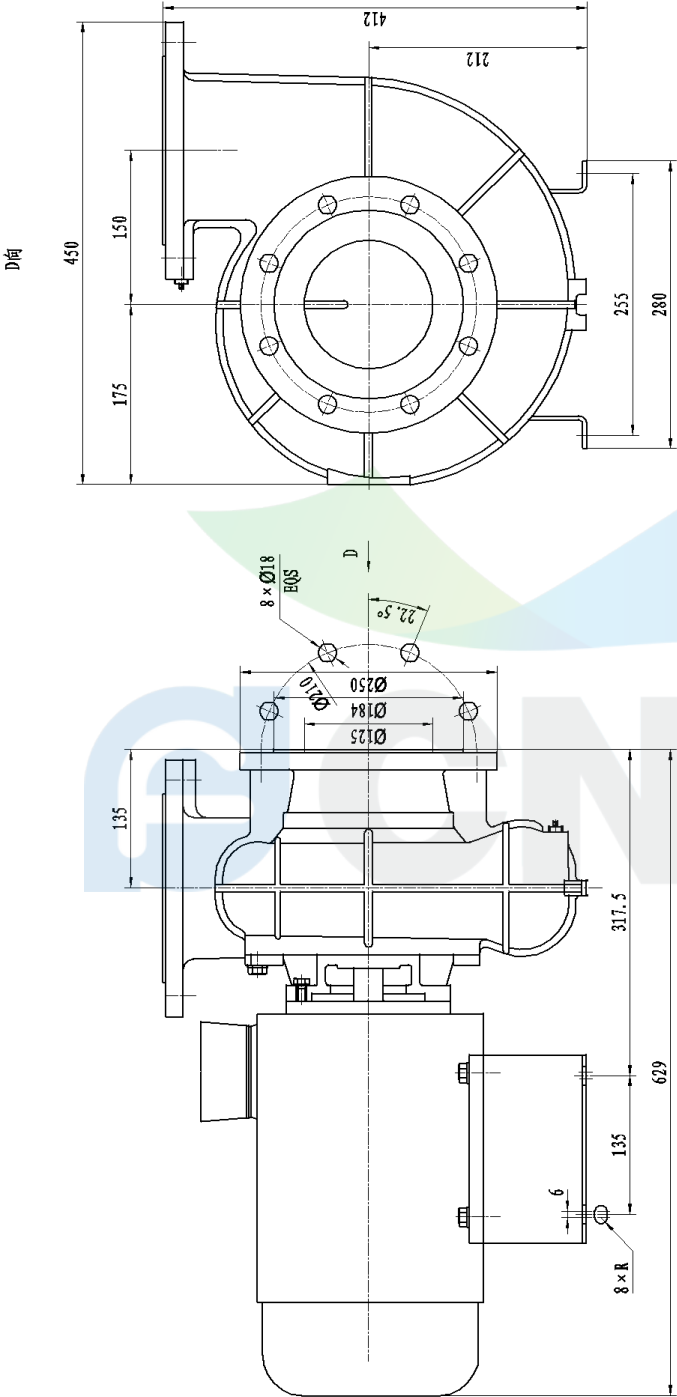

注：进出口法兰尺寸一致。

推图
描校
图底图号
图图总号
签字
日期

 南方泵业			
冷却塔专用泵			
WLT125-5/4			
安装尺寸图		图样	比例
		记	重量
		A	B
		共 1 页	第 1 页
标记	更改	签字	日期
设计	审核	标准	
校对	审定		
审核		日期	
工艺			