
	<b>Product Information</b> <b>WLT150-6A/5.5</b>	Manufacturer	CNP
		Address	Yuhang District, Hangzhou, Zhejiang,
		Contact	86-571-88637351
		Date	2022/03/08
		Client Name	DPA
Project Name		Client Addr.	
Item NO		Contacts	Alireza
		Contact	

Part NO.	1100135963
----------	------------

Product Picture	Note
	<p>Non-self-priming, single stage, single suction, horizontal, axial suction and radical discharge.</p> <p>Motor is fixed with a baseplate, and the pump is easily to be installed for no support for pump body.</p> <p>Back-pull-out desiagn, easy to maintain.</p> <p>Pump shaft is the same one as motor shaft, small volume and light weight.</p> <p>The impeller and pump body are designed through excellent hydraulic calculation.The optimum working condition of pump is set according to market demand, high efficiency.</p> <p>The main parts like impellers and casings are made of stainless steel.</p> <p>Castings adopt resin sand casting process, bright and clean surface, good appearance, compact structure</p>

#### Material

Impeller	304
Pump body	HT200
Rubber code	NBR
Material Code	S

#### Installation

Connection Code	F
Installation type	horizontal
Maximum Operation Pressure	6Bar

#### Medium

Liquid Temperature Range	-15~+100
--------------------------	----------

#### Structure dimension

Inlet & outlet size types	DN
Inlet Bore	150
Outlet Diameter	150
Rotation Direction	Anti-clockwise rotation viewing from inlet

#### Motor


Number of Motor Phase	Three Phase
Protection Class	IP55
Insulation Class	F
Motor Power	5.5
Power Frequency	50Hz
Rated Voltage (V)	380V

#### Seal


Mechanical Seal	TDS-28/BSE4
-----------------	-------------


#### Others

Weight (kg)	108
-------------	-----


	<b>Performance Curve</b> <b>WLT150-6A/5.5</b>	Manufacturer	CNP
		Address	Yuhang District, Hangzhou, Zhejiang,
		Contact	86-571-88637351
		Date	2022/03/08
Project Name		Client Name	DPA
Item NO		Client Addr.	
		Contacts	Alireza
		Contact	


The hydraulic performance curve have been tested with Clean Water at 20°C, density 1000kg/m<sup>3</sup>, and at 1bar atmospheric pressure. ISO99062012 Grade 3B

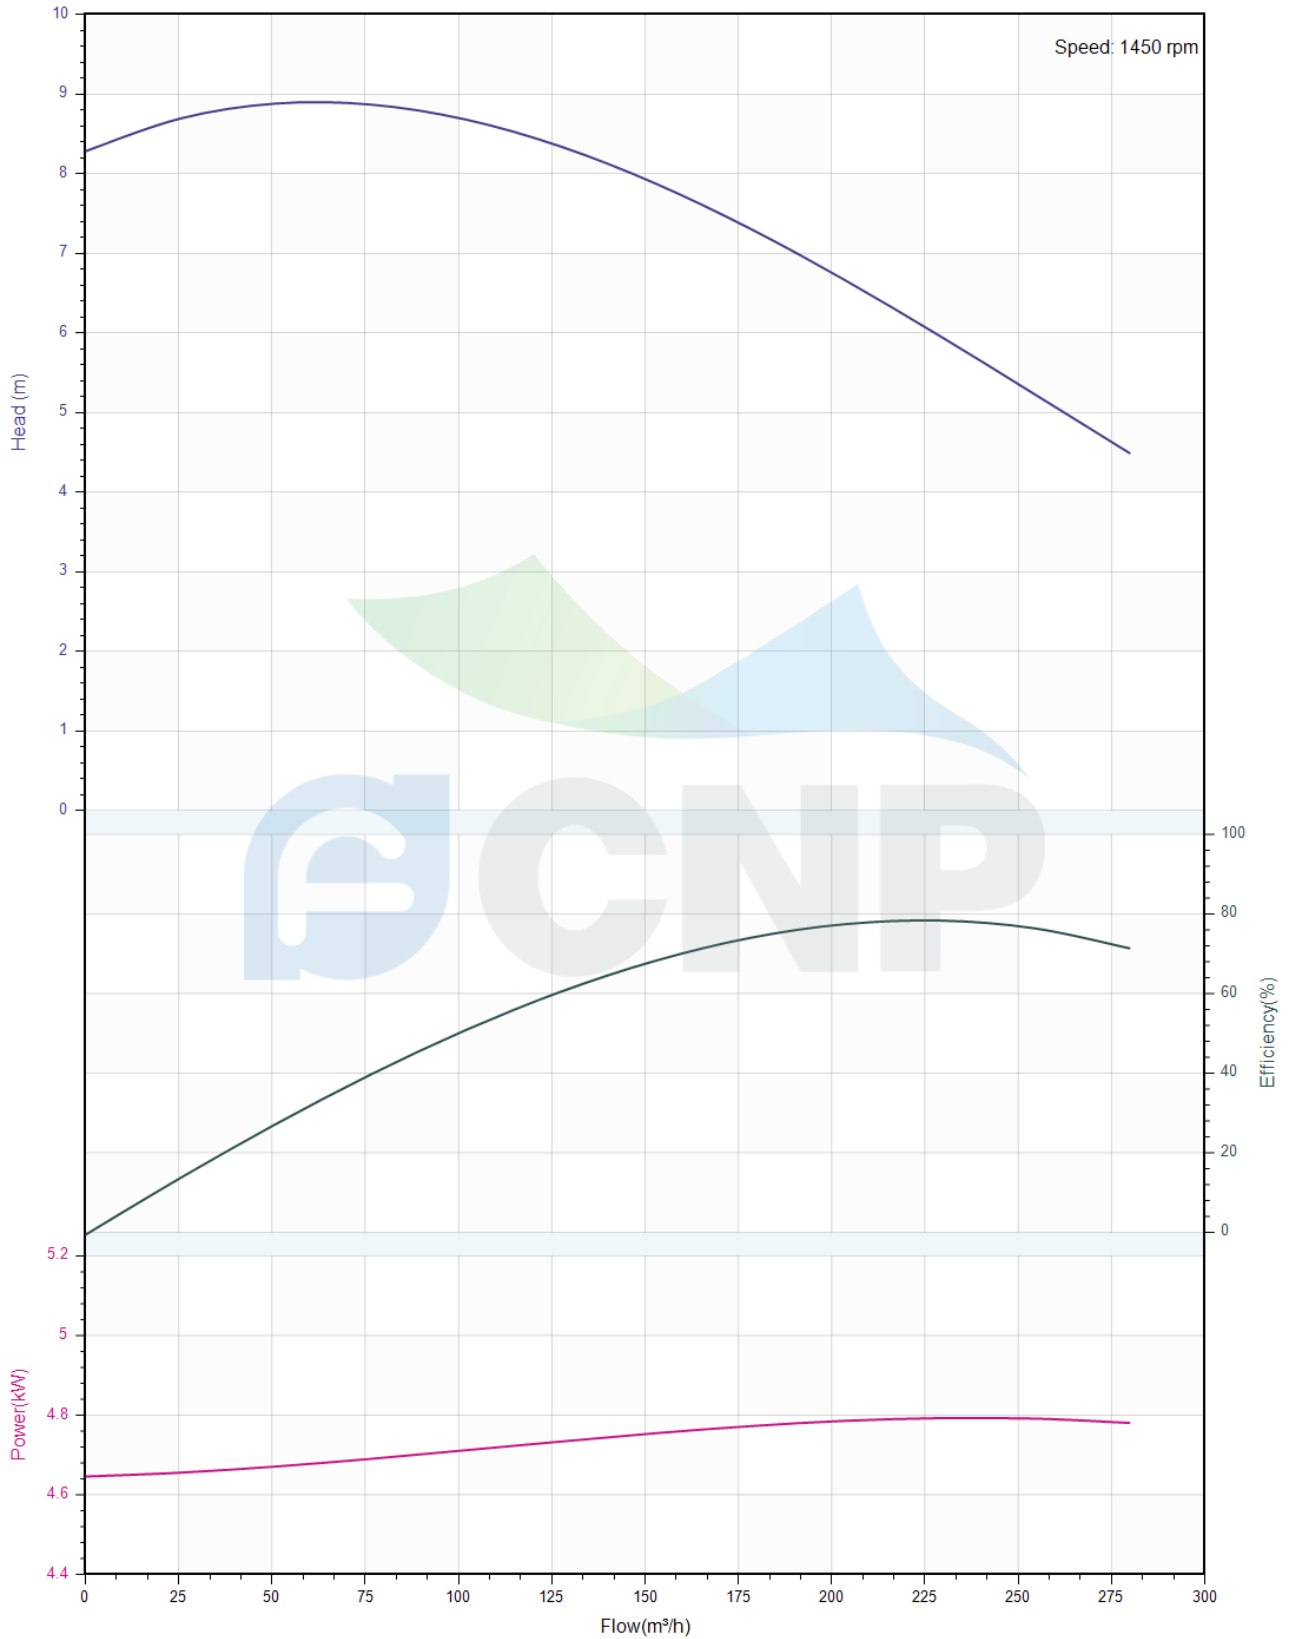


	<b>Pump Technical Parameters</b> <b>WLT150-6A/5.5</b>	Manufacturer	CNP
		Address	Yuhang District, Hangzhou, Zhejiang,
		Contact	86-571-88637351
		Date	2022/03/08
Project Name		Client Name	DPA
Item NO		Client Addr.	
		Contacts	Alireza
		Contact	

Rated parameters	
Pump model	WLT150-6A/5.5
Part NO.	1100135963
Rated flow (m <sup>3</sup> /h)	220
Rated head (m)	6
Rated efficiency (%)	70
Power (kW)	5.5
Speed (rpm)	1450
Max impeller diameter (mm)	197
Medium	
Pumped medium	Clean Water
Working temperature (°C)	20
Medium density (kg/m <sup>3</sup> )	1000
Viscosity (mm <sup>2</sup> /s)	1

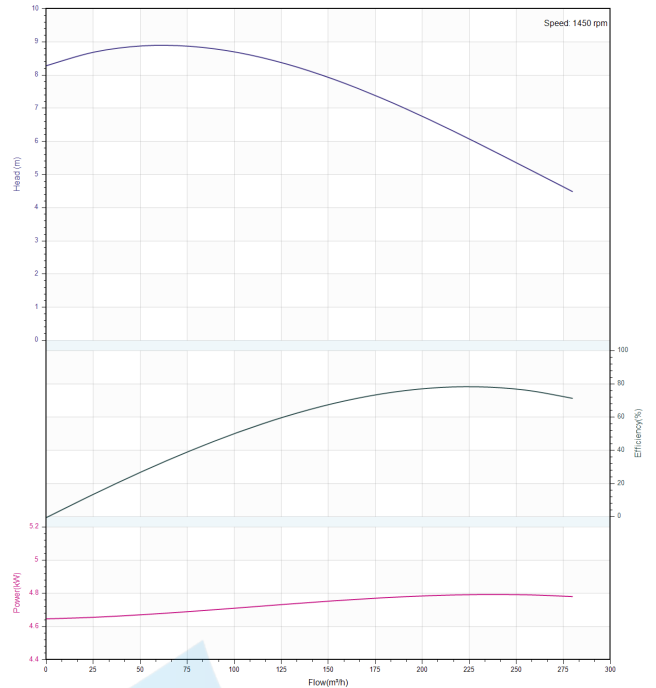

	<b>Structure picture</b> <b>WLT150-6A/5.5</b>	Manufacturer	CNP
		Address	Yuhang District, Hangzhou, Zhejiang,
		Contact	86-571-88637351
		Date	2022/03/08
		Client Name	DPA
Project Name		Client Addr.	
Item NO		Contacts	Alireza
		Contact	

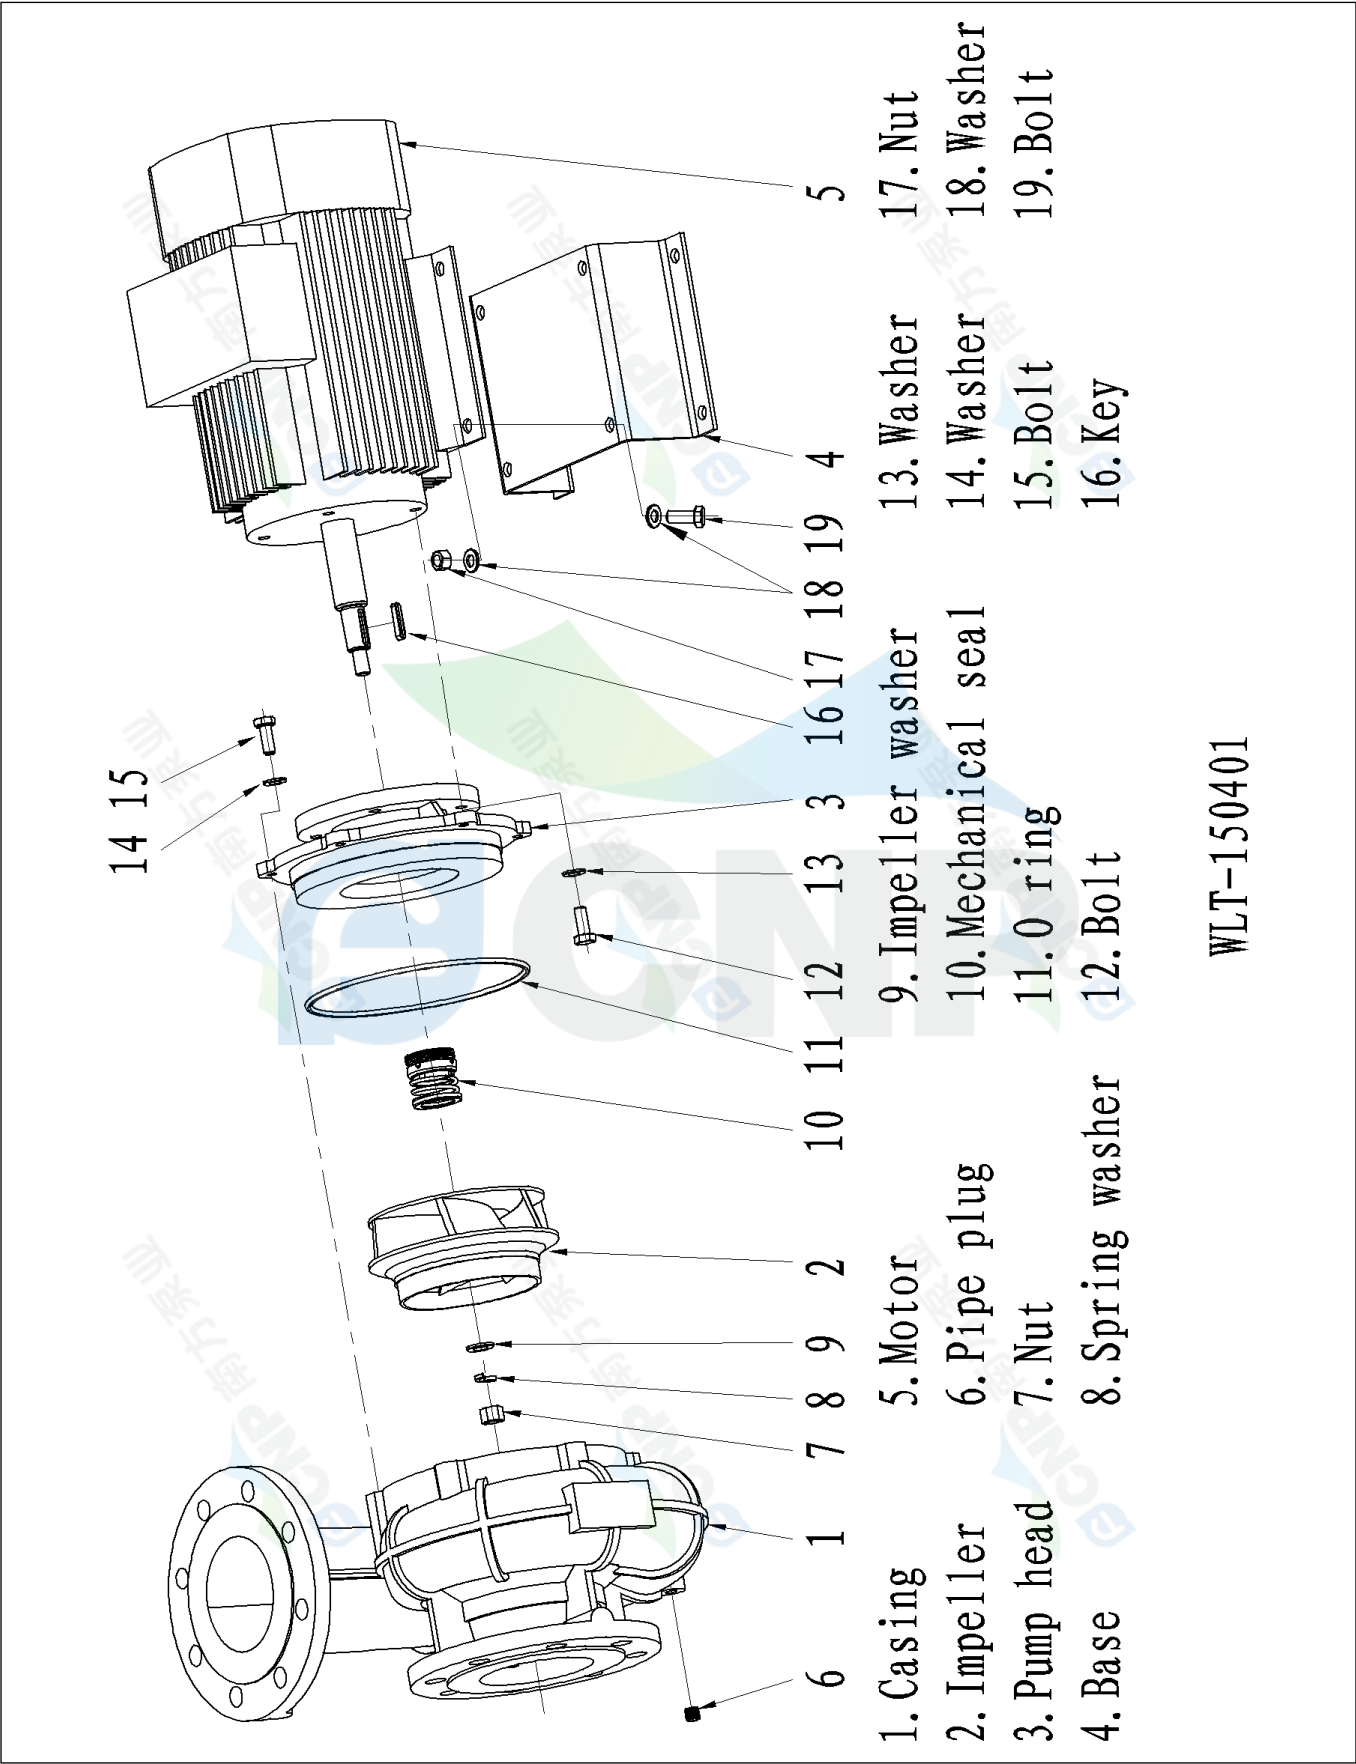

WLT-150401



Manufacturer	CNP
Address	Yuhang District, Hangzhou, Zhejiang,
Contact	86-571-88637351
Date	2022/03/08
Client Name	DPA
Client Addr.	
Contacts	Alireza
Contact	

[illegible]

注：进出水口法兰尺寸一致。

描 图
描 校
旧底图总号
底 图 总 号
签 字
日 期