


 CNP 南方泵业	Product Information WLTS65-5A/0.75	Manufacturer	Nanfang Pump Industry Co.,Ltd (CNP)
		Address	Hangzhou, Zhejiang, China
		Contact	86-571-88637351
		Date	2025/07/10
Project Name		Client Name	
		Client Addr.	
Item NO		Contacts	hediye
		Contact	


Part NO.	1100270620
Product Picture: (Note: Images may not be the same as the product)	Note
	The pump is non-self-priming, single-stage single-suction horizontal, axial water inlet, radial water outlet. The motor is fixed with the base, and there is no need to support and install the pump body end, which is easy to install. The rear pull-back mechanism is adopted, which is easy to maintain.
Material	
Pump body	HT200
Impeller	ZG07Cr19Ni9
Rubber code	NBR
Material Code	H
Installation	
Connection Code	F
Installation type	horizontal
Maximum Operation Pressure	6bar
Medium	
Liquid Temperature Range	-15°C~100°C
Structure dimension	
Inlet & outlet size types	DN
Inlet Bore	65
Outlet Diameter	65
Rotation Direction	Clockwise rotation viewed from motor end
Explosed view	WLTS exploded view
Motor	
Number of Motor Phase	Three Phase
Protection Class	IP56
Insulation Class	F
Motor Power(kW)	0.75KW
Power Frequency(Hz)	50HZ
Rated Voltage (V)	380V
Energy Efficiency Level	IE3
Seal	
Mechanical Seal	NISO(BIA)-18/S2WE4-
Others	
Weight (kg)	30

	Performance Curve WLTS65-5A/0.75	Manufacturer	Nanfang Pump Industry Co.,Ltd (CNP)
		Address	Hangzhou, Zhejiang, China
		Contact	86-571-88637351
		Date	2025/07/10
Project Name		Client Name	
Item NO		Client Addr.	
		Contacts	hediye
		Contact	

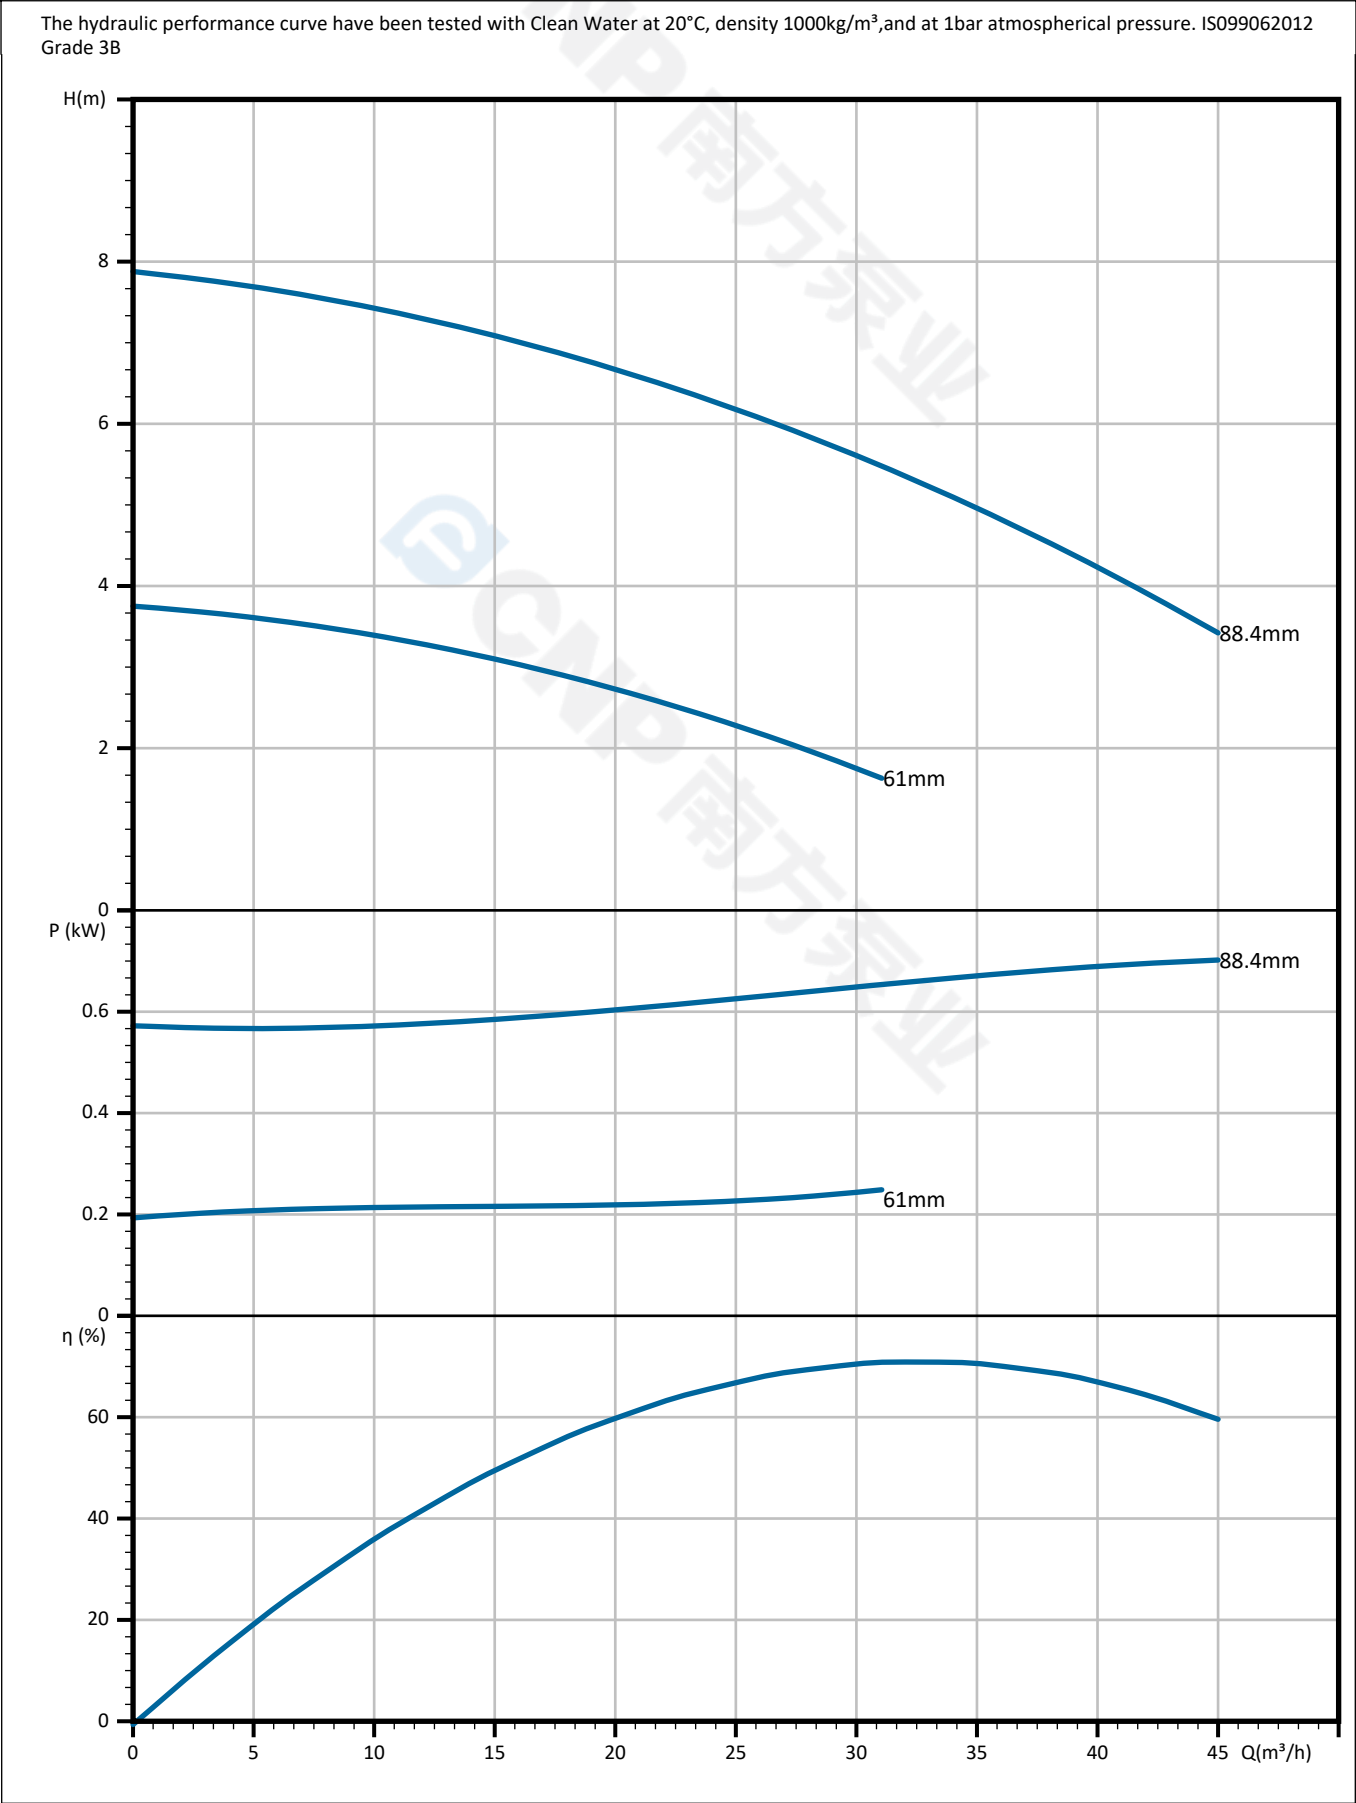

 CNP 南方泵业	Pump Technical Parameters WLTS65-5A/0.75	Manufacturer	Nanfang Pump Industry Co.,Ltd (CNP)
		Address	Hangzhou, Zhejiang, China
		Contact	86-571-88637351
		Date	2025/07/10
Project Name		Client Name	
		Client Addr.	
Item NO		Contacts	hediye
		Contact	


Rated parameters	
Pump model	WLTS65-5A/0.75
Part NO.	1100270620
Rated flow	35 m³/h
Rated head	5 m
Rated efficiency	70 (%)
Power (kW)	0.68 kW
Speed (rpm)	2900
Max impeller diameter (mm)	88.4
Medium	
Pumped medium	Clean Water
Working temperature (°C)	20
Medium density (kg/m³)	1000
Viscosity (mm²/s)	1

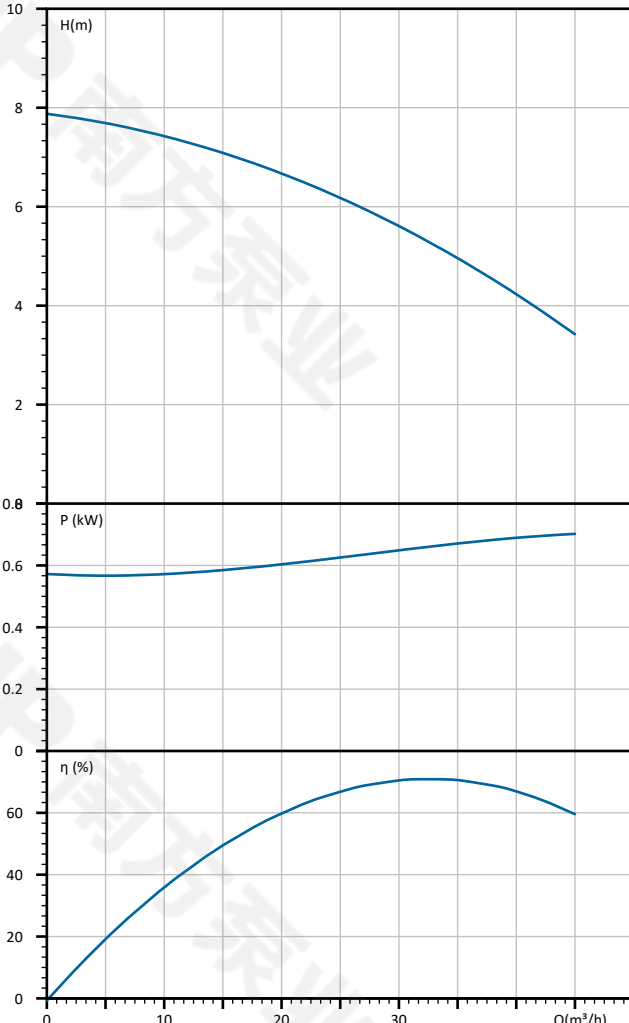

Flow Q (m³/h)	Head H (m)	Power P (kW)	Efficiency η (%)
0	8.0	0.55	0
10	7.5	0.56	35
20	6.8	0.60	60
30	5.8	0.65	70
35	3.5	0.70	60

 CNP 南方泵业	Dimension Drawing WLTS65-5A/0.75	Manufacturer	Nanfang Pump Industry Co.,Ltd (CNP)
		Address	Hangzhou, Zhejiang, China
		Contact	86-571-88637351
		Date	2025/07/10
Project Name		Client Name	
		Client Addr.	
Item NO		Contacts	hediye
		Contact	

WLTS65-5A/0.75

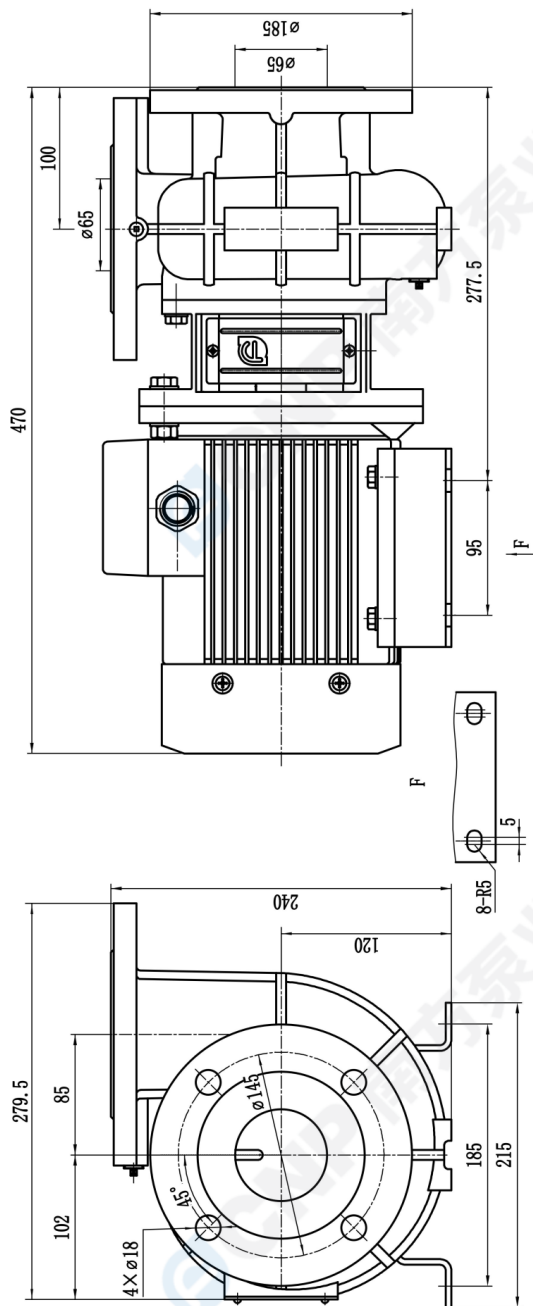


注：进出口法兰尺寸一致。

描图
描校
旧底图总号
底图总号
签字
日期

 CNP 南方泵业		冷却塔专用泵	
安装尺寸图		图样	比例
		标记	1:3
		重量	
		共 1 页	第 1 页
标记	更改文件	签字	日期
设计	标准化	审定	
校对	审核	日期	
工艺			

 CNP 南方泵业	Explosed view WLTS65-5A/0.75	Manufacturer	Nanfang Pump Industry Co.,Ltd (CNP)
		Address	Hangzhou, Zhejiang, China
		Contact	86-571-88637351
		Date	2025/07/10
Project Name		Client Name	
Item NO		Client Addr.	
		Contacts	hediye
		Contact	

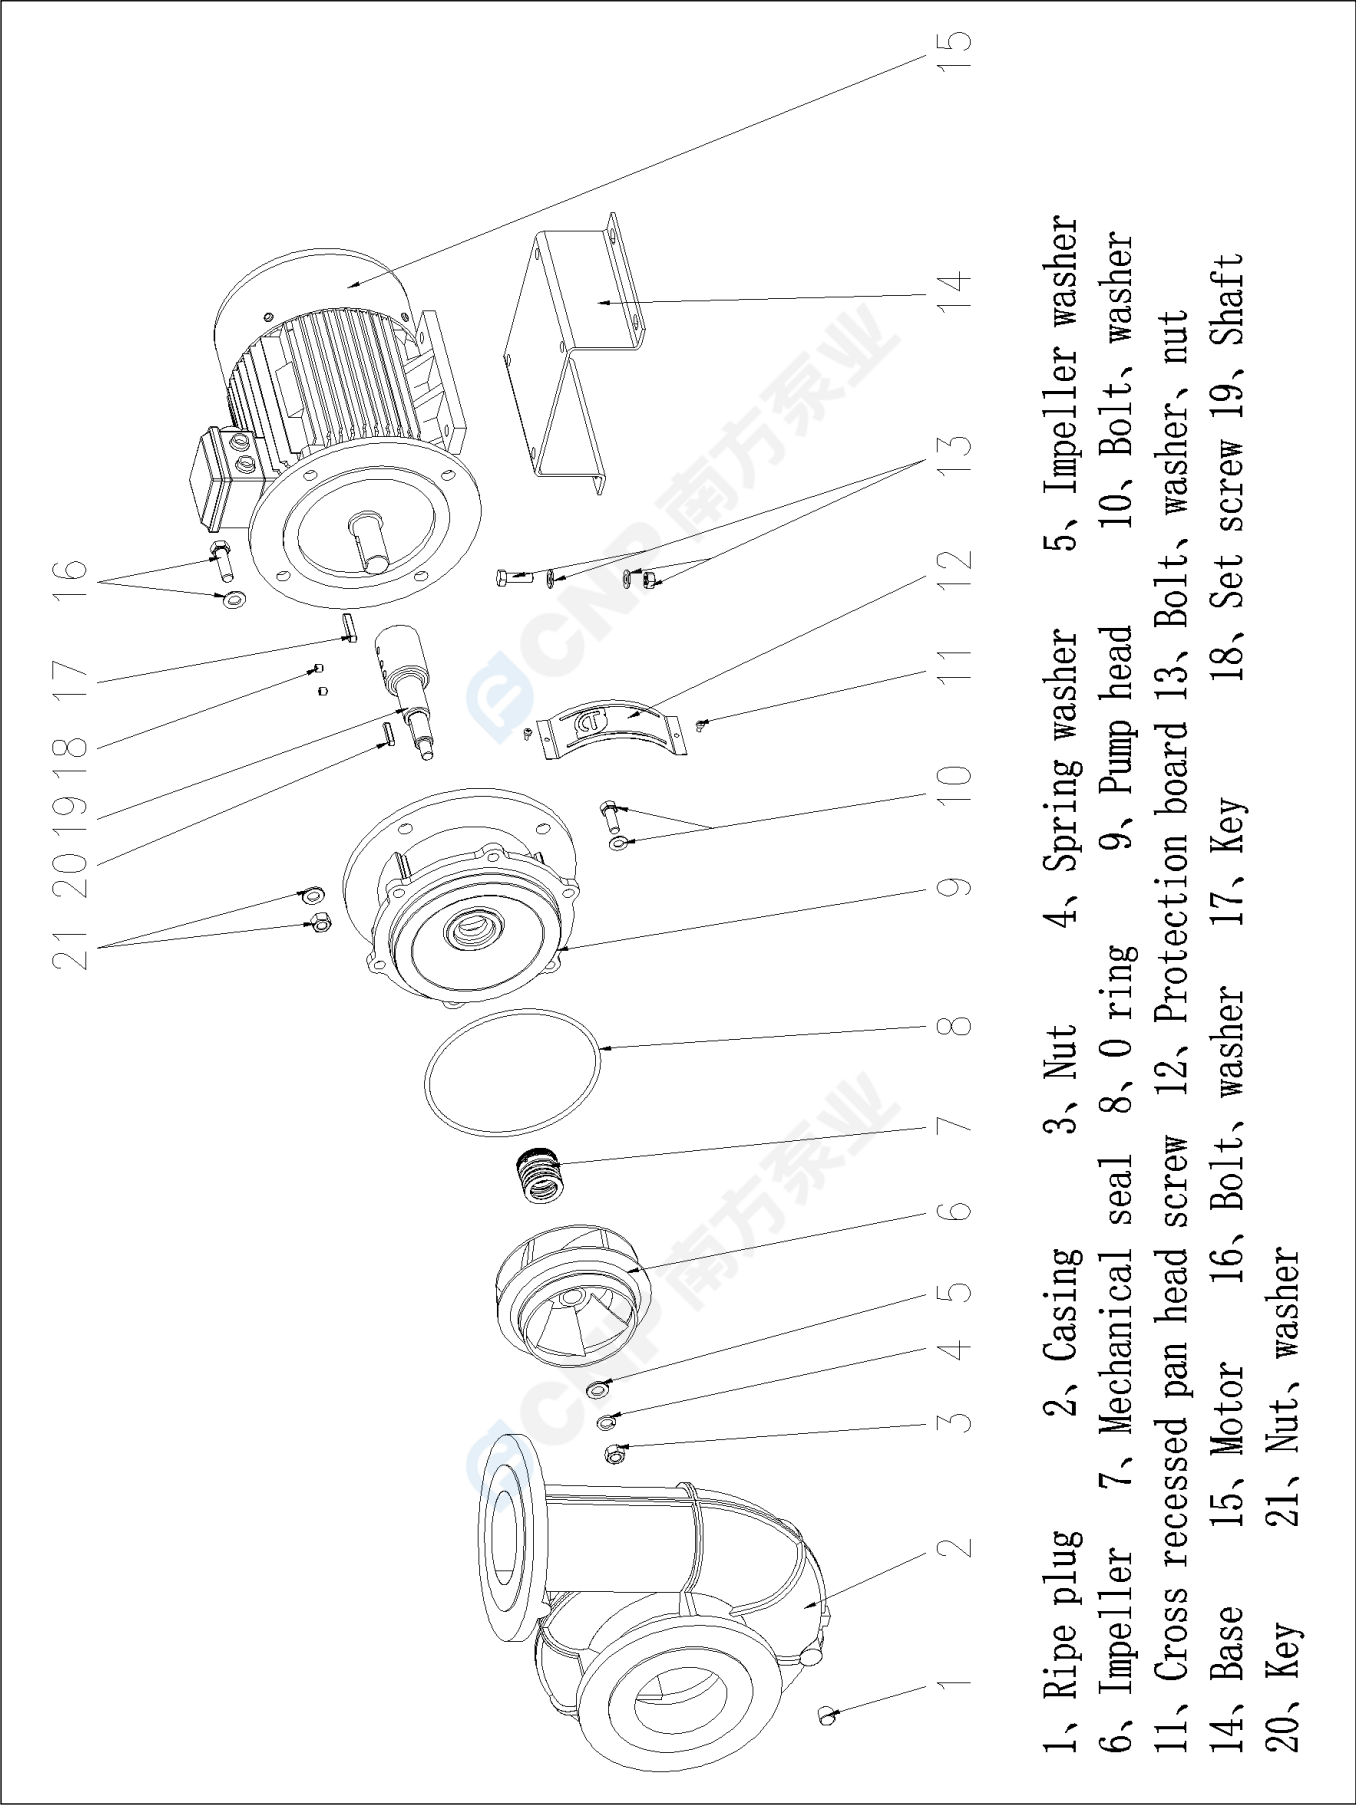

 CNP 南方泵业	Physical picture WLTS65-5A/0.75	Manufacturer	Nanfeng Pump Industry Co.,Ltd (CNP)
		Address	Hangzhou, Zhejiang, China
		Contact	86-571-88637351
		Date	2025/07/10
Project Name		Client Name	
		Client Addr.	
Item NO		Contacts	hediye
		Contact	



 CNP 南方泵业	Order Data WLTS65-5A/0.75	Manufacturer	Nanfang Pump Industry Co.,Ltd (CNP)
		Address	Hangzhou, Zhejiang, China
		Contact	86-571-88637351
		Date	2025/07/10
		Client Name	
Project Name		Client Addr.	
Item NO		Contacts	hediye
		Contact	

Pump model WLTS65-5A/0.75
Part NO. 1100270620
Product price
Quantity 1
Total price

Inquiry notes