

 CNP 南方泵业	Product Information SJ95-2	Manufacturer	Nanfang Pump Industry Co.,Ltd (CNP)
		Address	Hangzhou, Zhejiang, China
		Contact	86-571-88637351
		Date	2025/06/30
		Client Name	WEPKO
Project Name		Client Addr.	
Item NO		Contacts	Wepko
		Contact	

Part NO.	1100052495		
Product Picture: (Note: Images may not be the same as the product)		Note	
		Stainless steel multi-stage submersible pump is equipped with a submersible motor which can replace traditional long axis Deep-well pump.The pump is also equipped with a check valve to protect itself from reflux and water hammer.	

Nameplate parameters

Flow	95 m ³ /h
Head	20 m
Efficiency	72 %
Speed	2900 rpm
Number of stages	2

Material

Impeller	304
Material Code	F

Installation

Operation Pressure	34bar
Maximum Immersion Depth	70m
Maximum Operation Pressure	38bar

Medium

Medium Temperature	15~40°C
Medium PH Value	6.5~8.5
Liquid Temperature Range	+25°C

Structure dimension

Rotation Direction	Anti-clockwise rotation viewing from outlet
Explosed view	SJ75,95exploded view


Motor

Number of Motor Phase	Three Phase
Protection Class	IP68
Insulation Class	F
Motor Power(kW)	9.2KW
Power Frequency(Hz)	50HZ
Rated Voltage (V)	380

Others

Weight (kg)	83
-------------	----

	Performance Curve SJ95-2	Manufacturer	Nanfang Pump Industry Co.,Ltd (CNP)
		Address	Hangzhou, Zhejiang, China
		Contact	86-571-88637351
		Date	2025/06/30
Project Name		Client Name	WEPKO
Item NO		Client Addr.	
		Contacts	Wepko
		Contact	

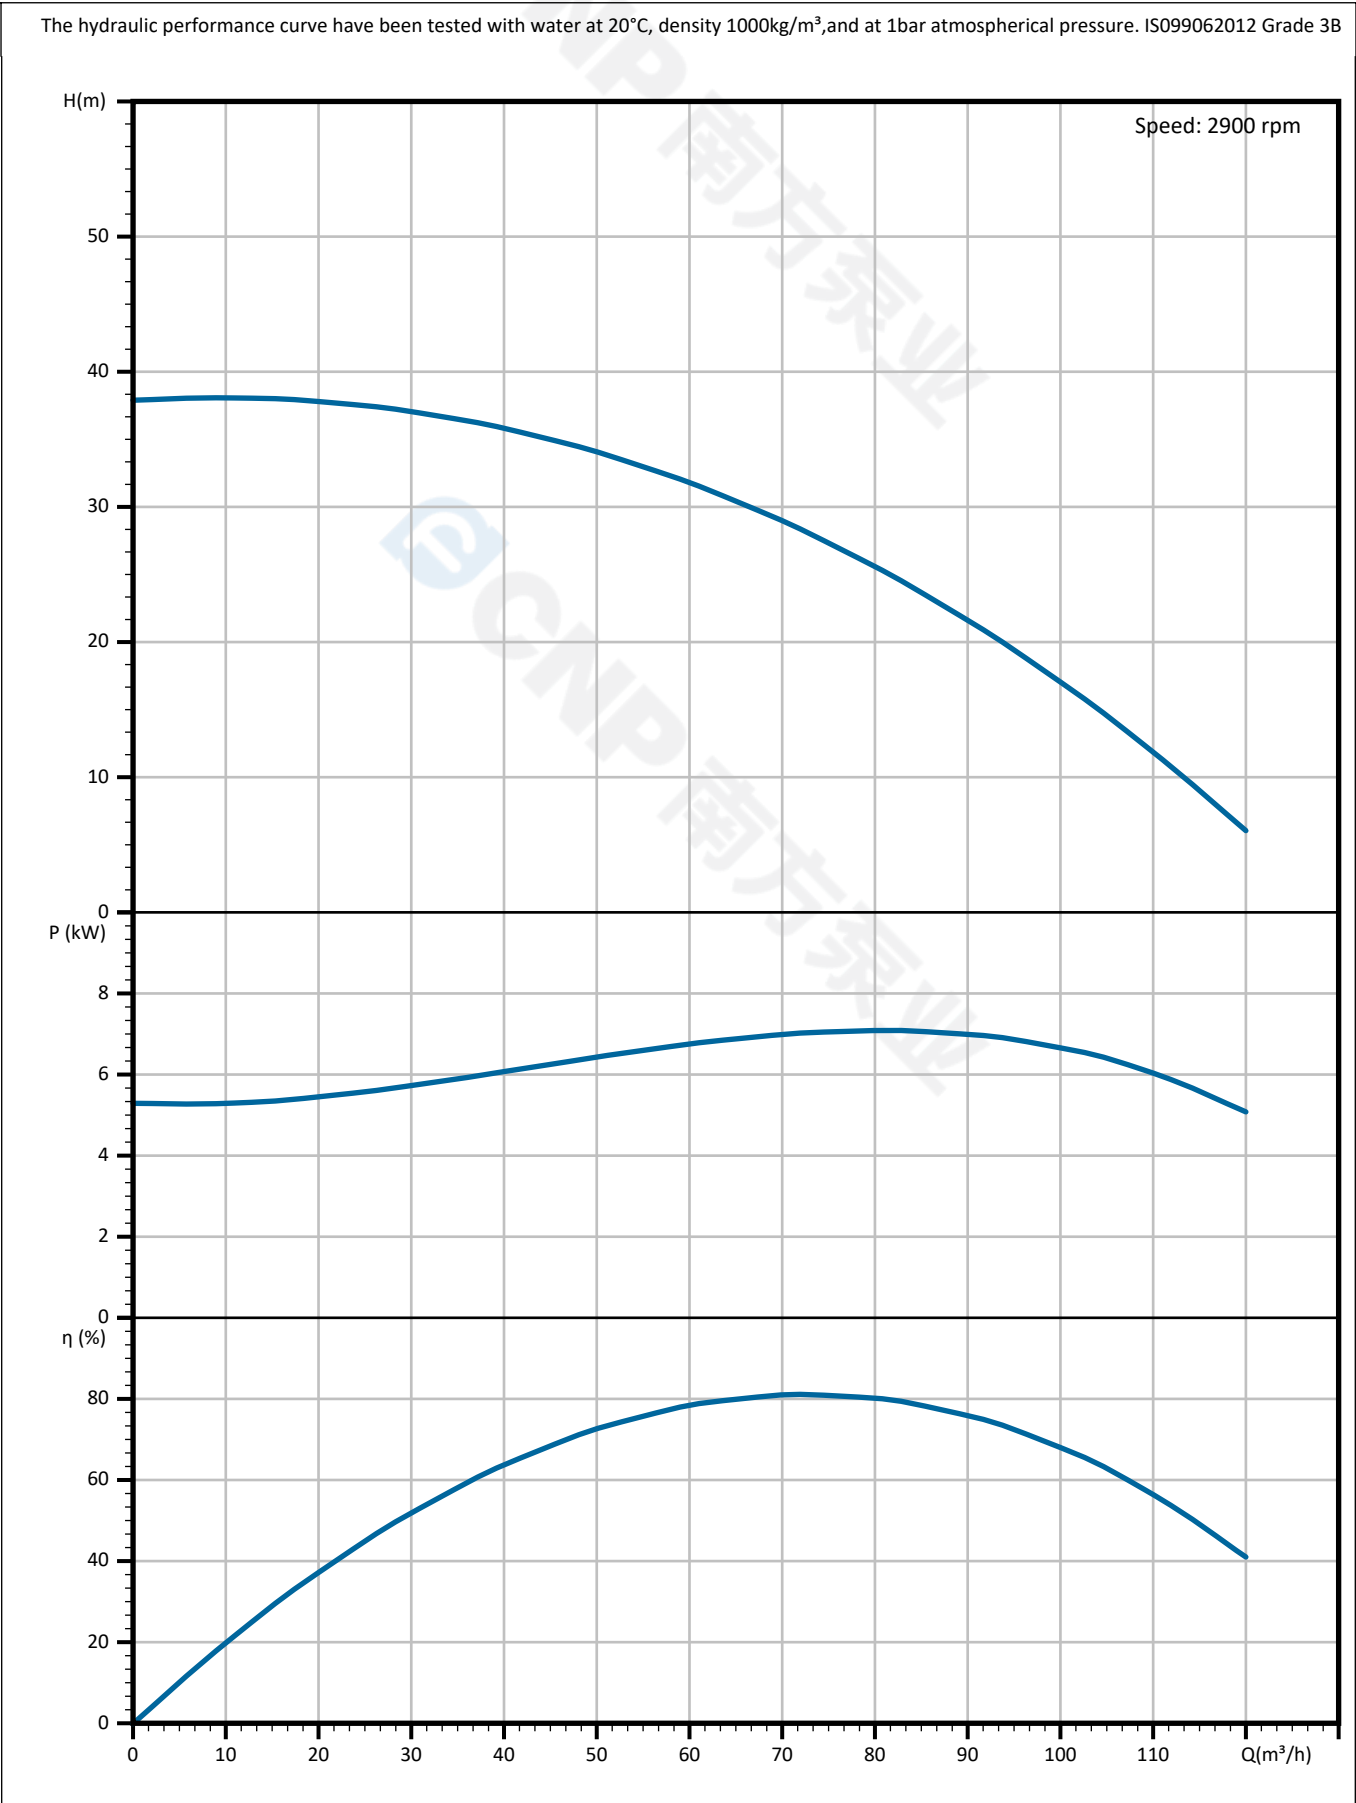


 CNP 南方泵业	Pump Technical Parameters SJ95-2	Manufacturer	Nanfang Pump Industry Co.,Ltd (CNP)
		Address	Hangzhou, Zhejiang, China
		Contact	86-571-88637351
		Date	2025/06/30
Project Name		Client Name	WEPKO
		Client Addr.	
Item NO		Contacts	Wepko
		Contact	

Rated parameters	
Pump model	SJ95-2
Part NO.	1100052495
Rated flow	95 m³/h
Rated head	20 m
Rated efficiency	72 (%)
Power (kW)	7.19 kW
Speed (rpm)	2900
Max impeller diameter (mm)	131
Medium	
Pumped medium	water
Working temperature (°C)	20
Medium density (kg/m³)	1000
Viscosity (mm²/s)	1

The image displays three performance graphs for the SJ95-2 pump, plotted against flow rate (Q) in m³/h on the x-axis, ranging from 0 to 110. The y-axes represent Head (H) in meters, Power (P) in kW, and Efficiency (η) in percent.

- Head (H) vs Flow (Q):** The head starts at approximately 38 m at 0 m³/h and decreases as flow increases, reaching about 5 m at 110 m³/h.
- Power (P) vs Flow (Q):** The power starts at approximately 5.2 kW at 0 m³/h, increases to a peak of about 7.2 kW at 80 m³/h, and then decreases to about 5.0 kW at 110 m³/h.
- Efficiency (η) vs Flow (Q):** The efficiency starts at 0% at 0 m³/h, increases to a peak of about 82% at 70 m³/h, and then decreases to about 42% at 110 m³/h.

 CNP 南方泵业	Explosed view SJ95-2	Manufacturer	Nanfeng Pump Industry Co.,Ltd (CNP)
		Address	Hangzhou, Zhejiang, China
		Contact	86-571-88637351
		Date	2025/06/30
Project Name		Client Name	WEPKO
Item NO		Client Addr.	
		Contacts	Wepko
		Contact	

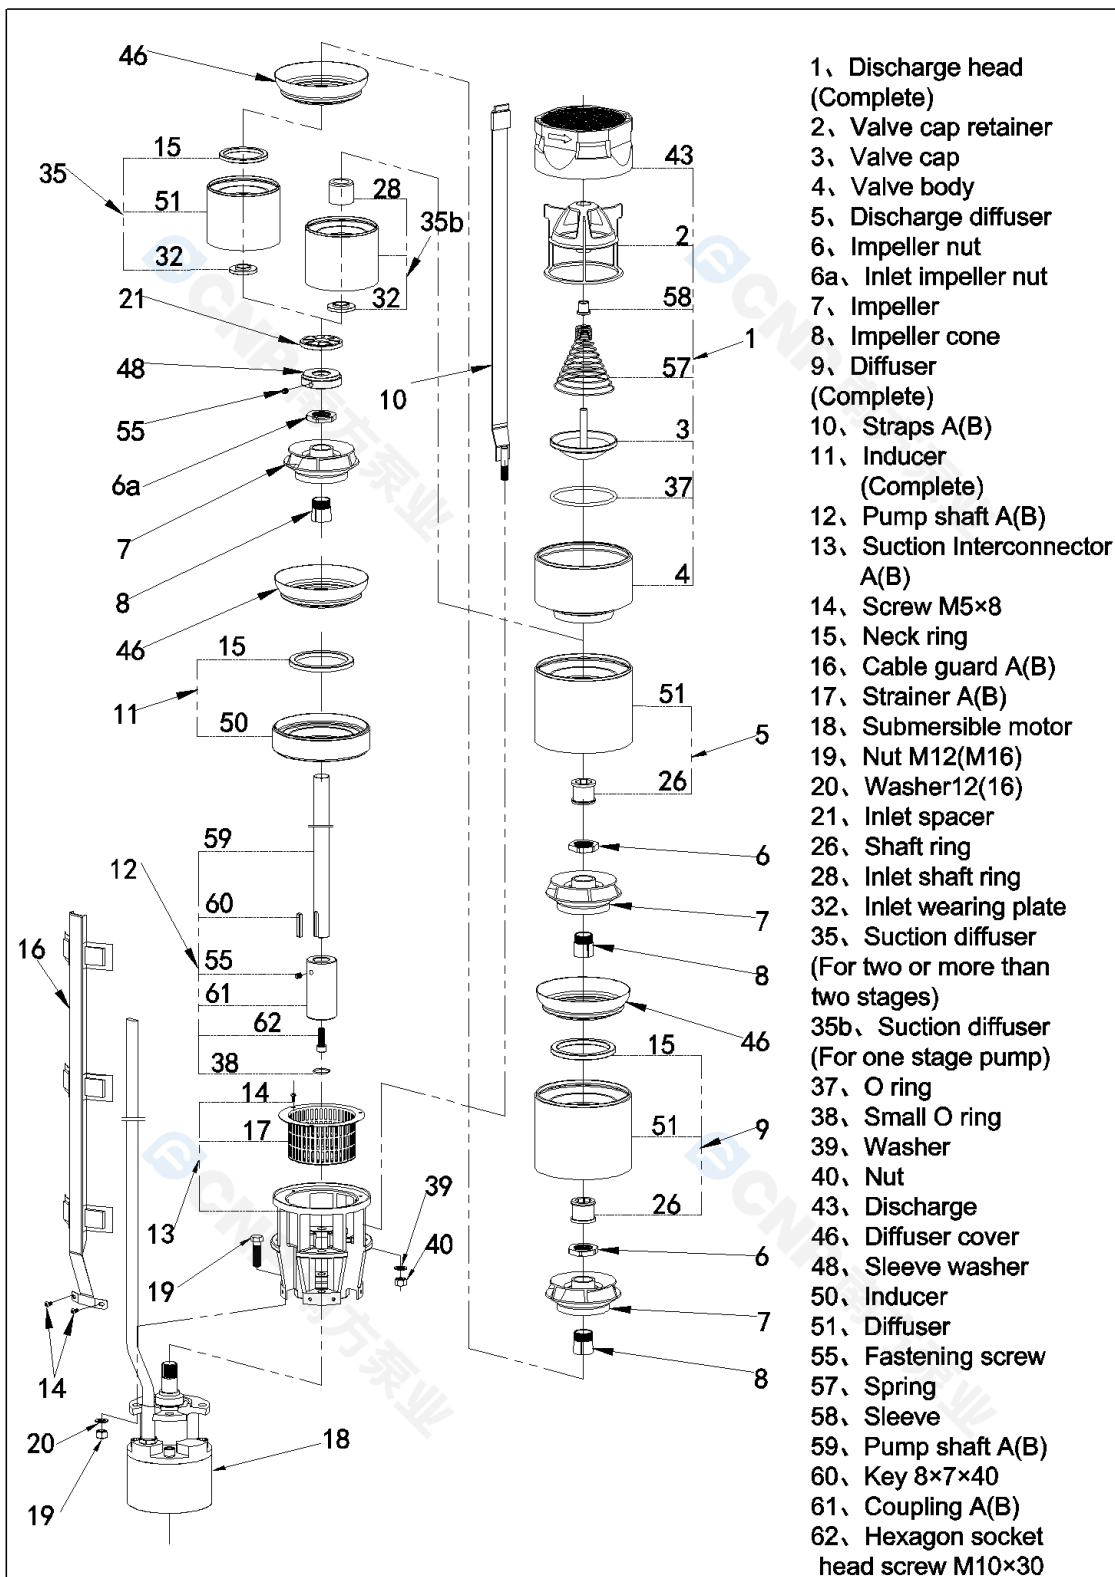

E-SJ 75, 95-090903

 CNP 南方泵业	Physical picture SJ95-2	Manufacturer	Nanfang Pump Industry Co.,Ltd (CNP)
		Address	Hangzhou, Zhejiang, China
		Contact	86-571-88637351
		Date	2025/06/30
		Client Name	WEPKO
Project Name		Client Addr.	
Item NO		Contacts	Wepko
		Contact	



 CNP 南方泵业	Order Data SJ95-2	Manufacturer	Nanfang Pump Industry Co.,Ltd (CNP)
		Address	Hangzhou, Zhejiang, China
		Contact	86-571-88637351
		Date	2025/06/30
		Client Name	WEPKO
Project Name		Client Addr.	
Item NO		Contacts	Wepko
		Contact	

Pump model SJ95-2
Part NO. 1100052495
Product price
Quantity 1
Total price

Inquiry notes