

 CNP 南方泵业	Product Information SJ95-6	Manufacturer	Nanfang Pump Industry Co.,Ltd (CNP)
		Address	Hangzhou, Zhejiang, China
		Contact	86-571-88637351
		Date	2025/06/30
		Client Name	WEPKO
Project Name		Client Addr.	
Item NO		Contacts	Wepko
		Contact	

Part NO.	1100052535		
Product Picture: (Note: Images may not be the same as the product)		Note	
		Stainless steel multi-stage submersible pump is equipped with a submersible motor which can replace traditional long axis Deep-well pump.The pump is also equipped with a check valve to protect itself from reflux and water hammer.	

Nameplate parameters

Flow	95 m ³ /h
Head	62 m
Efficiency	72 %
Speed	2900 rpm
Number of stages	6

Material

Impeller	304
Material Code	F

Installation

Operation Pressure	34bar
Maximum Immersion Depth	70m
Maximum Operation Pressure	38bar

Medium

Medium Temperature	15~40°C
Medium PH Value	6.5~8.5
Liquid Temperature Range	+25°C

Structure dimension

Rotation Direction	Anti-clockwise rotation viewing from outlet
Explosed view	SJ75,95exploded view


Motor

Number of Motor Phase	Three Phase
Protection Class	IP68
Insulation Class	F
Motor Power(kW)	25KW
Power Frequency(Hz)	50HZ
Rated Voltage (V)	380

Others

Weight (kg)	155
-------------	-----

	Performance Curve SJ95-6	Manufacturer	Nanfang Pump Industry Co.,Ltd (CNP)
		Address	Hangzhou, Zhejiang, China
		Contact	86-571-88637351
		Date	2025/06/30
Project Name		Client Name	WEPKO
Item NO		Client Addr.	
		Contacts	Wepko
		Contact	

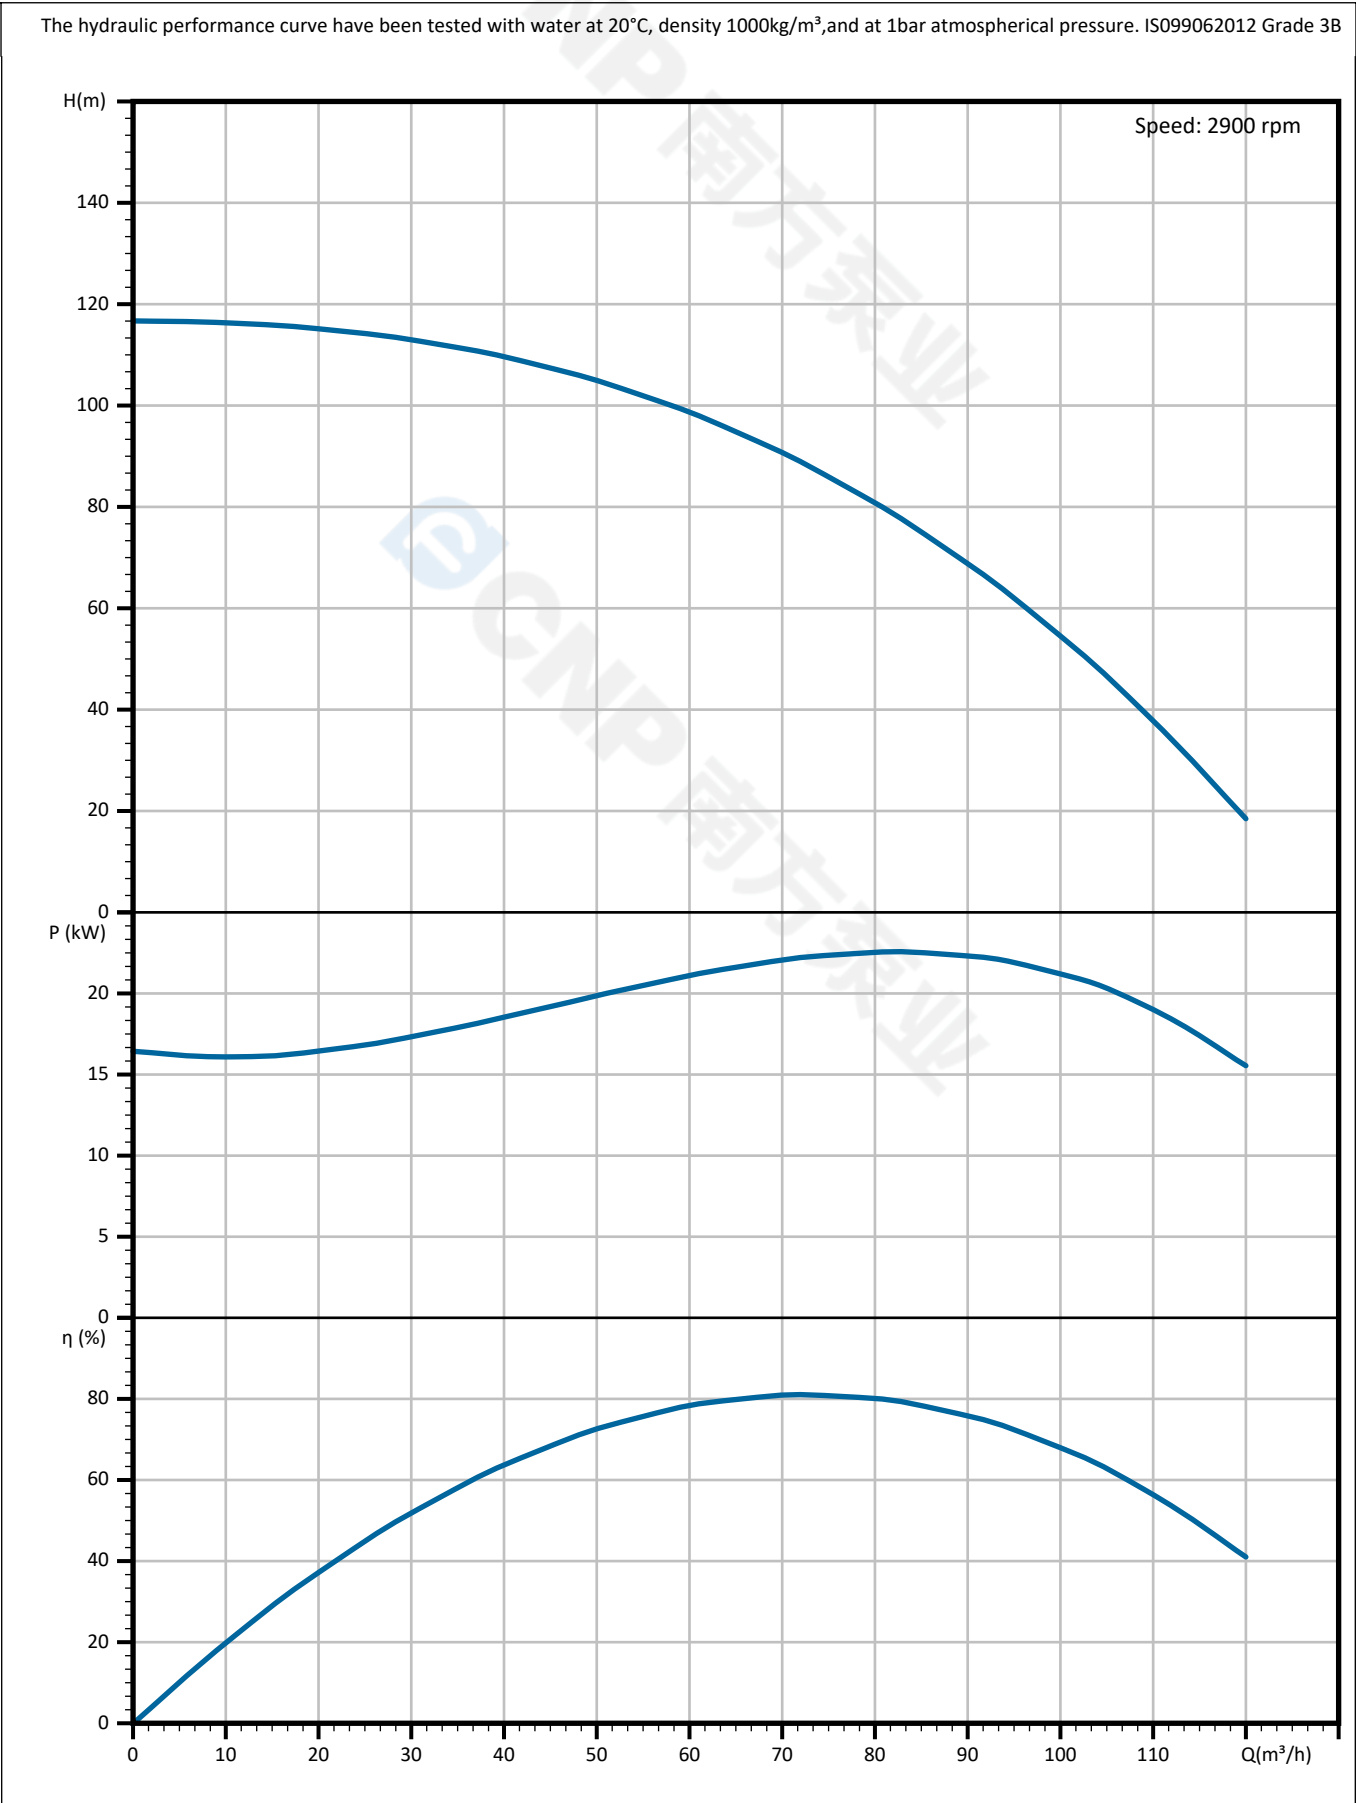


 CNP 南方泵业	Pump Technical Parameters SJ95-6	Manufacturer	Nanfang Pump Industry Co.,Ltd (CNP)
		Address	Hangzhou, Zhejiang, China
		Contact	86-571-88637351
		Date	2025/06/30
Project Name		Client Name	WEPKO
		Client Addr.	
Item NO		Contacts	Wepko
		Contact	

Rated parameters	
Pump model	SJ95-6
Part NO.	1100052535
Rated flow	95 m³/h
Rated head	62 m
Rated efficiency	72 (%)
Power (kW)	22.3 kW
Speed (rpm)	2900
Max impeller diameter (mm)	131
Medium	
Pumped medium	water
Working temperature (°C)	20
Medium density (kg/m³)	1000
Viscosity (mm²/s)	1

The image displays three performance graphs for the SJ95-6 pump, plotted against flow rate (Q) in m³/h. The top graph shows the head (H) in meters, starting at approximately 118 m at 0 m³/h and decreasing to about 20 m at 110 m³/h. The middle graph shows the power (P) in kW, starting at approximately 16.5 kW at 0 m³/h, peaking at about 22.3 kW around 80 m³/h, and then decreasing to about 15.5 kW at 110 m³/h. The bottom graph shows the efficiency (η) in percent, starting at 0% at 0 m³/h, peaking at about 82% around 70 m³/h, and then decreasing to about 42% at 110 m³/h.

Q (m³/h)	H (m)	P (kW)	η (%)
0	118	16.5	0
20	115	17.0	35
40	108	19.0	65
60	98	21.5	78
80	82	22.3	82
100	55	20.5	70
110	20	15.5	42

 CNP 南方泵业	Explosed view SJ95-6	Manufacturer	Nanfeng Pump Industry Co.,Ltd (CNP)
		Address	Hangzhou, Zhejiang, China
		Contact	86-571-88637351
		Date	2025/06/30
Project Name		Client Name	WEPKO
Item NO		Client Addr.	
		Contacts	Wepko
		Contact	

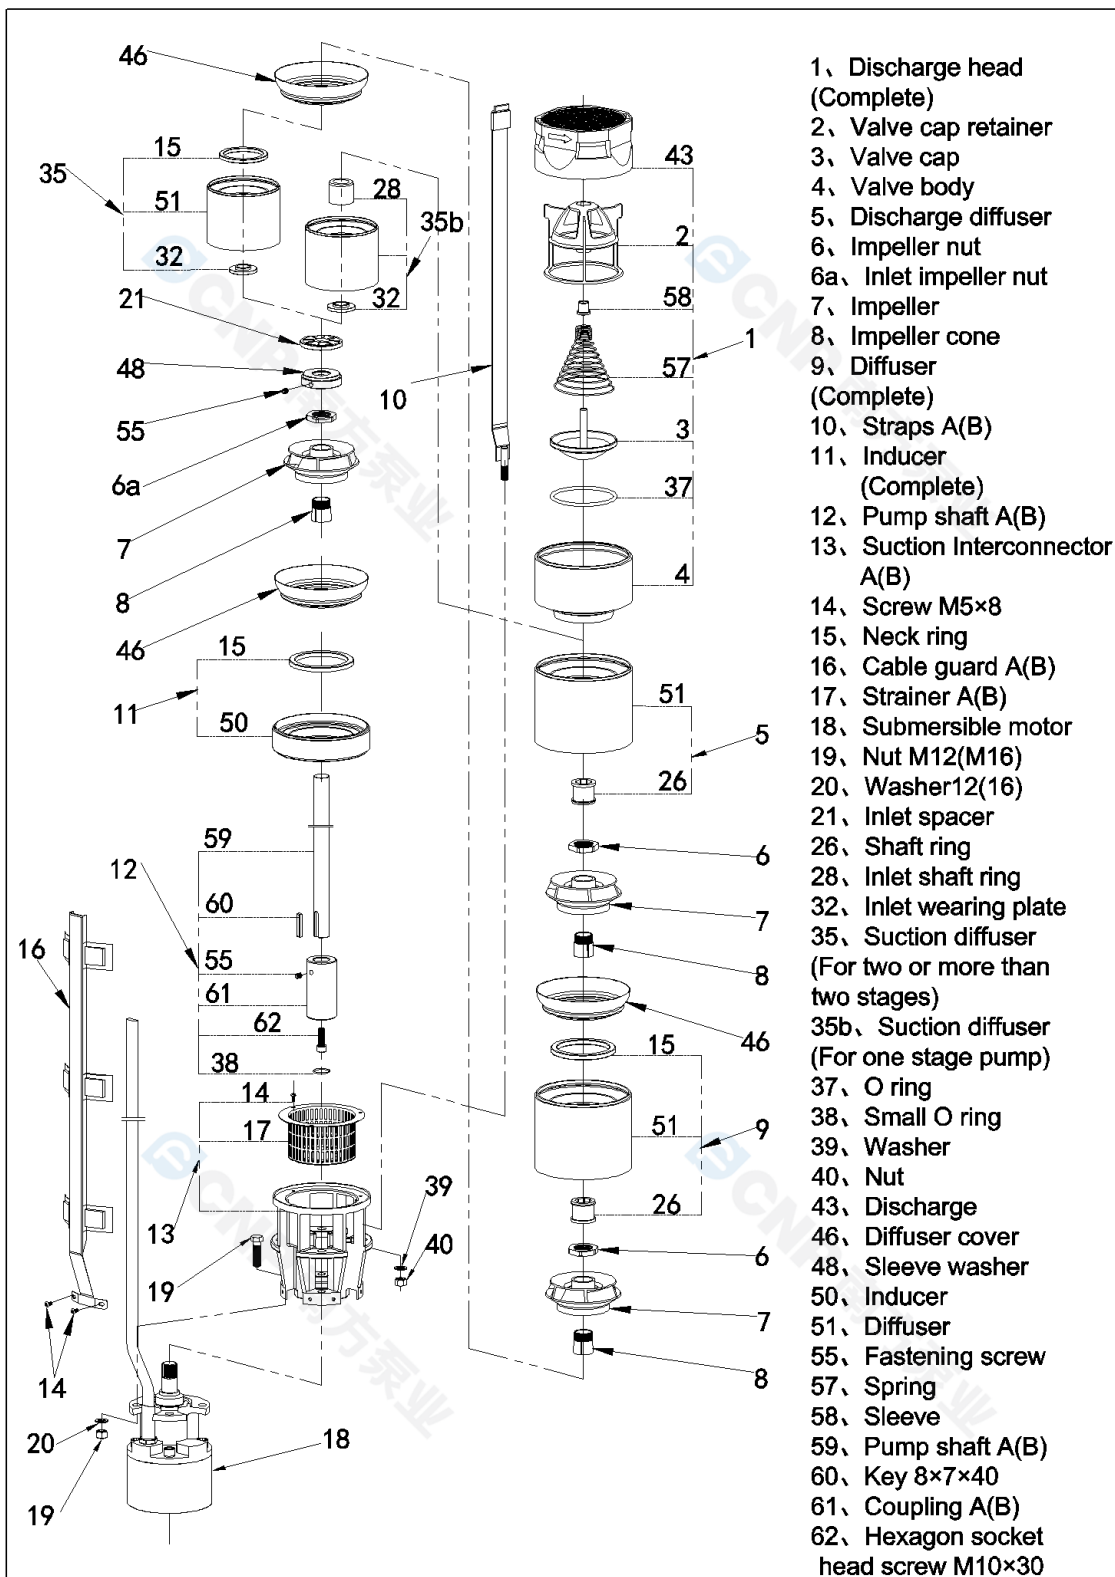

E-SJ 75, 95-090903

 CNP 南方泵业	Physical picture SJ95-6	Manufacturer	Nanfang Pump Industry Co.,Ltd (CNP)
		Address	Hangzhou, Zhejiang, China
		Contact	86-571-88637351
		Date	2025/06/30
		Client Name	WEPKO
Project Name		Client Addr.	
Item NO		Contacts	Wepko
		Contact	



 CNP 南方泵业	Order Data SJ95-6	Manufacturer	Nanfang Pump Industry Co.,Ltd (CNP)
		Address	Hangzhou, Zhejiang, China
		Contact	86-571-88637351
		Date	2025/06/30
		Client Name	WEPKO
Project Name		Client Addr.	
Item NO		Contacts	Wepko
		Contact	

Pump model SJ95-6
Part NO. 1100052535
Product price
Quantity 1
Total price

Inquiry notes