


 CNP 南方泵业	Product Information ZS50-32-200/6 4.0	Manufacturer	Nanfang Pump Industry Co.,Ltd (CNP)
		Address	Hangzhou, Zhejiang, China
		Contact	86-571-88637351
		Date	2025/07/01
		Client Name	WEPKO
Project Name		Client Addr.	
Item NO		Contacts	Wepko
		Contact	


Part NO.	1100043679
Product Picture: (Note: Images may not be the same as the product)	Note
	Stainless steel horizontal single-stage centrifugal pump, the pump body is made of stainless steel plate stamping and expansion welding process, which can replace the traditional IS pump and general corrosion-resistant pump, with axial inlet and radial outlet.
Nameplate parameters	
Flow	12.5 m³/h
Head	42 m
Efficiency	47 %
Speed	3450 rpm
Technology	
Pump rotator speed	3450
Nameplate standards	CE
Material	
Impeller	304
Rubber code	p
Material Code	S
Installation	
Maximum Operation Pressure	10bar
Maximum Altitude	1000m
Medium	
Maximum Environment Temperature	40°C
Liquid Temperature Range	-20°C+100°C
Structure dimension	
Expolded view	ZS exploded view
Motor	
Number of Motor Phase	Three Phase
Protection Class	IP55
Insulation Class	F
Motor Power(kW)	4KW
Power Frequency(Hz)	60HZ
Rated Voltage (V)	380V
Rated Current (A)	8.0A
Energy Efficiency Level	IE2
Seal	
Mechanical Seal	ZS-24/BSE4
Others	
Weight (kg)	58

	Performance Curve ZS50-32-200/6 4.0	Manufacturer	Nanfang Pump Industry Co.,Ltd (CNP)
		Address	Hangzhou, Zhejiang, China
		Contact	86-571-88637351
		Date	2025/07/01
Project Name		Client Name	WEPKO
Item NO		Client Addr.	
		Contacts	Wepko
		Contact	

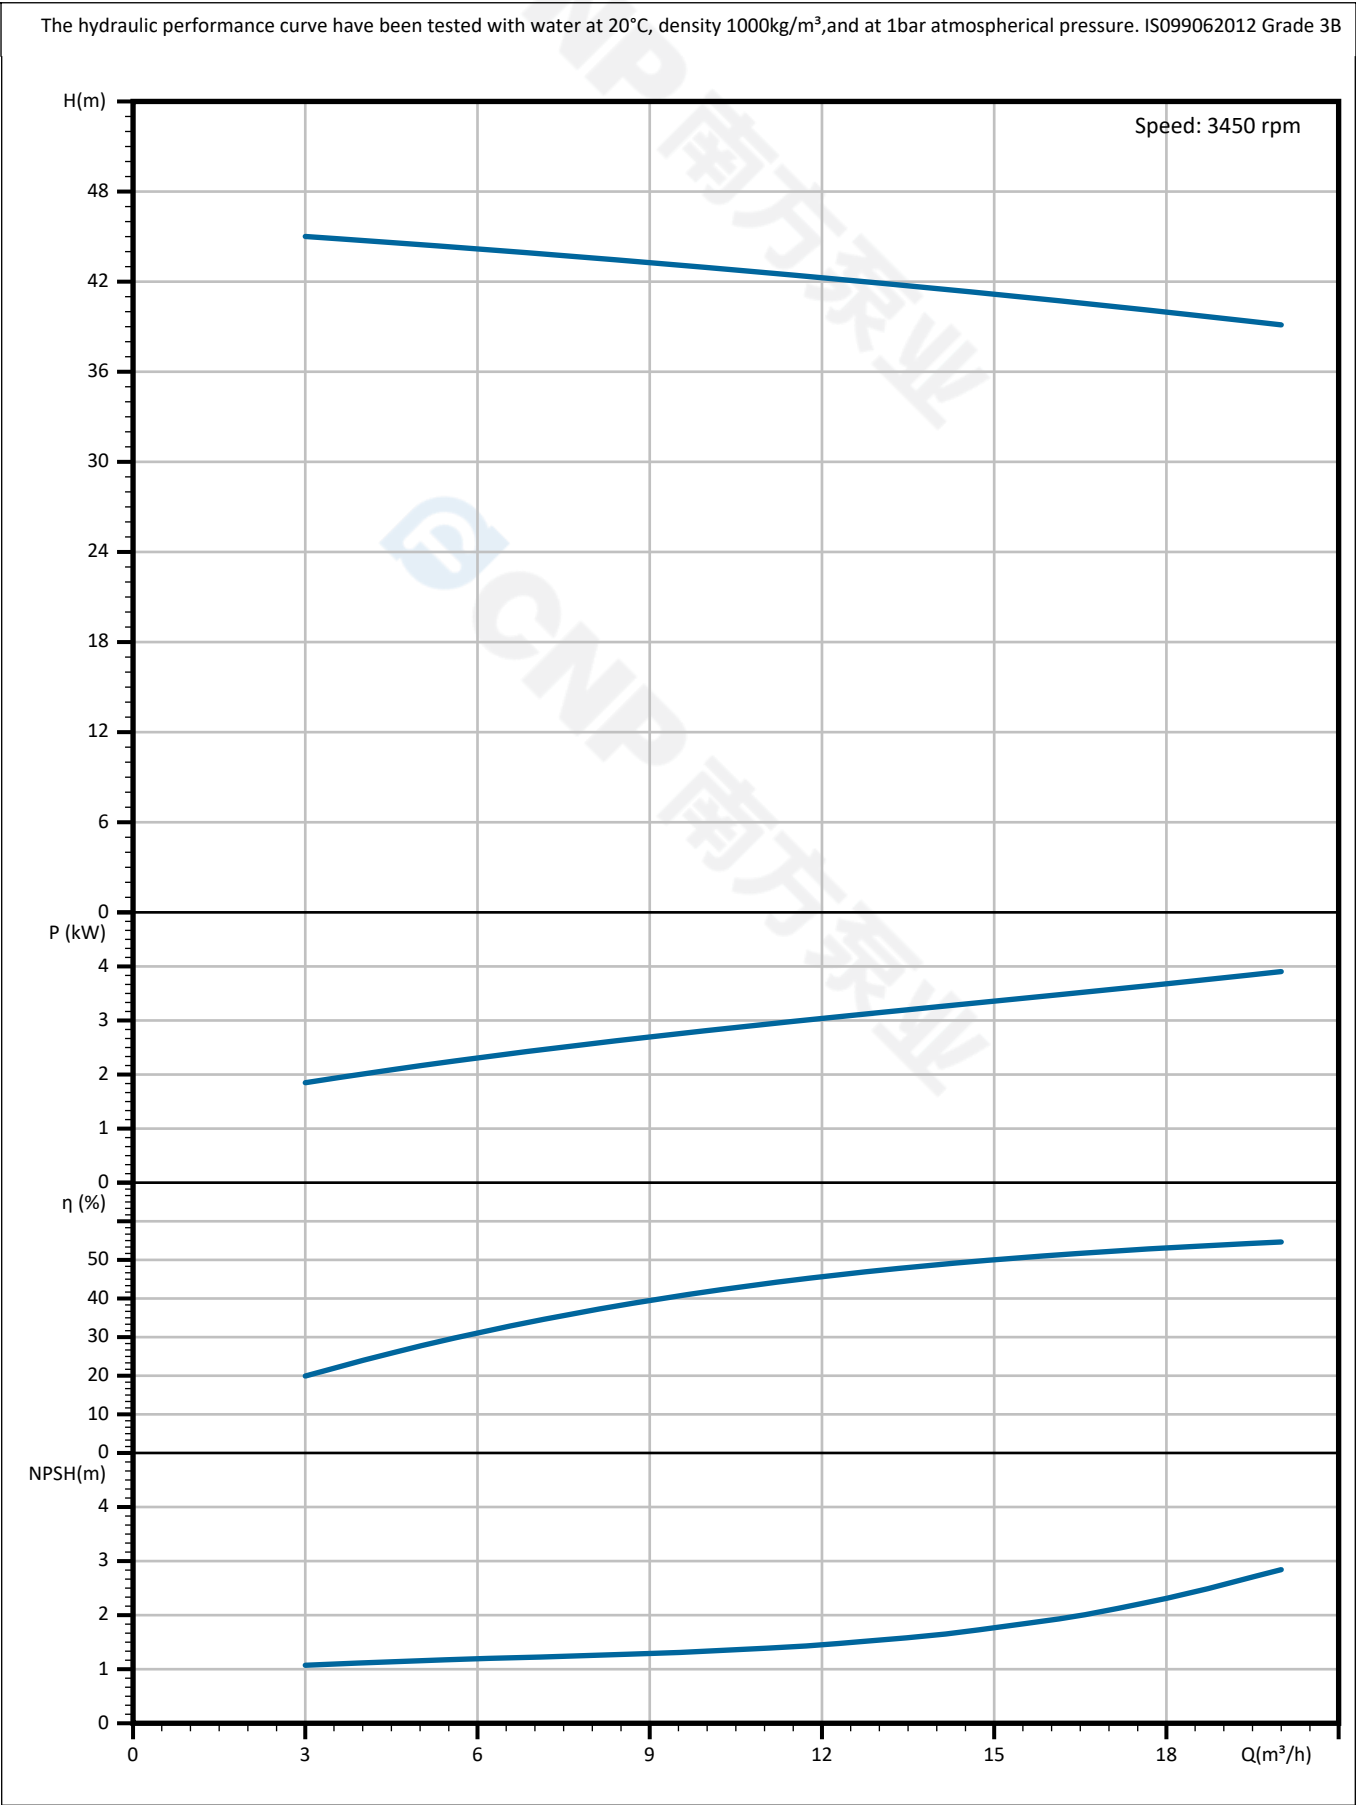

 CNP 南方泵业	Pump Technical Parameters ZS50-32-200/6 4.0	Manufacturer	Nanfang Pump Industry Co.,Ltd (CNP)
		Address	Hangzhou, Zhejiang, China
		Contact	86-571-88637351
		Date	2025/07/01
Project Name		Client Name	WEPKO
		Client Addr.	
Item NO		Contacts	Wepko
		Contact	

Rated parameters	
Pump model	ZS50-32-200/6 4.0
Part NO.	1100043679
Rated flow	12.5 m³/h
Rated head	42 m
Rated efficiency	47 (%)
Power (kW)	3.04 kW
NPSHr (m)	2.5
Speed (rpm)	3450
Max impeller diameter (mm)	160
Medium	
Pumped medium	water
Working temperature (°C)	20
Medium density (kg/m³)	1000
Viscosity (mm²/s)	1

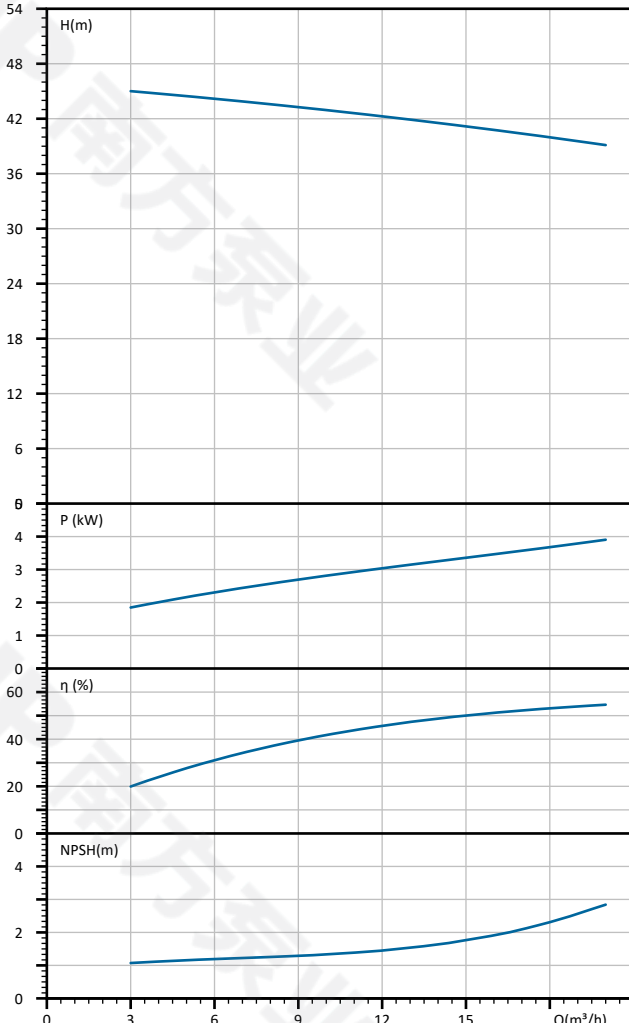


Q (m³/h)	H (m)
3	45
6	44
9	43
12	42
15	41
18	40

Q (m³/h)	P (kW)
3	1.8
6	2.2
9	2.6
12	3.0
15	3.4
18	3.8

Q (m³/h)	η (%)
3	20
6	32
9	40
12	46
15	50
18	54

Q (m³/h)	NPSH (m)
3	1.0
6	1.1
9	1.2
12	1.4
15	1.8
18	2.8

	Explosed view ZS50-32-200/6 4.0	Manufacturer	Nanfang Pump Industry Co.,Ltd (CNP)
		Address	Hangzhou, Zhejiang, China
Project Name		Contact	86-571-88637351
		Date	2025/07/01
Item NO		Client Name	WEPKO
		Client Addr.	
		Contacts	Wepko
		Contact	

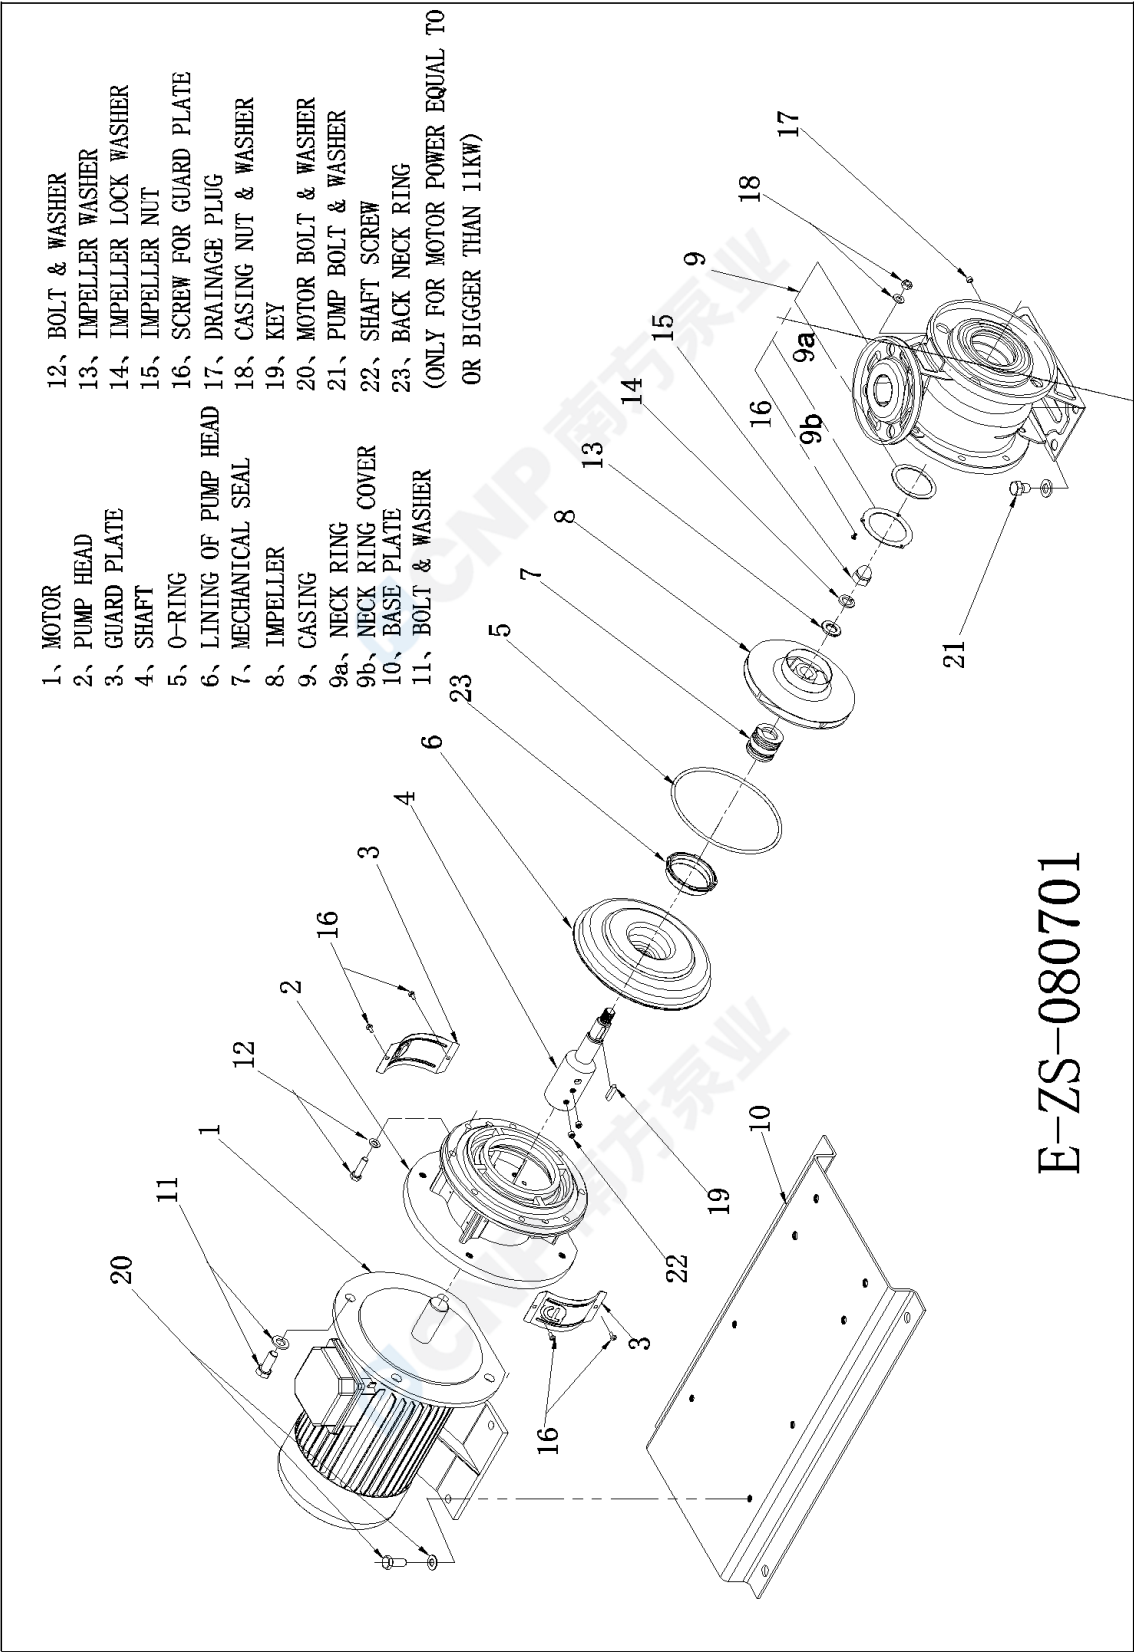

E-ZS-080701

 CNP 南方泵业	Physical picture ZS50-32-200/6 4.0	Manufacturer	Nanfang Pump Industry Co.,Ltd (CNP)
		Address	Hangzhou, Zhejiang, China
		Contact	86-571-88637351
		Date	2025/07/01
		Client Name	WEPKO
Project Name		Client Addr.	
Item NO		Contacts	Wepko
		Contact	



 CNP 南方泵业	Order Data ZS50-32-200/6 4.0	Manufacturer	Nanfang Pump Industry Co.,Ltd (CNP)
		Address	Hangzhou, Zhejiang, China
		Contact	86-571-88637351
		Date	2025/07/01
		Client Name	WEPKO
Project Name		Client Addr.	
Item NO		Contacts	Wepko
		Contact	

Pump model ZS50-32-200/6 4.0

Part NO. 1100043679

Product price

Quantity 1

Total price

Inquiry notes