


 CNP 南方泵业	Product Information ZS65-40-125/6 1.5	Manufacturer	Nanfang Pump Industry Co.,Ltd (CNP)
		Address	Hangzhou, Zhejiang, China
		Contact	86-571-88637351
		Date	2025/07/01
		Client Name	WEPKO
Project Name		Client Addr.	
Item NO		Contacts	
		Contact	

Part NO.	1100043850
Product Picture: (Note: Images may not be the same as the product)	Note
	Stainless steel horizontal single-stage centrifugal pump, the pump body is made of stainless steel plate stamping and expansion welding process, which can replace the traditional IS pump and general corrosion-resistant pump, with axial inlet and radial outlet.
Nameplate parameters	
Flow	25 m³/h
Head	13 m
Efficiency	68 %
Speed	3450 rpm
Technology	
Pump rotator speed	3450
Nameplate standards	CE
Material	
Impeller	304
Rubber code	p
Material Code	S
Installation	
Maximum Operation Pressure	10bar
Maximum Altitude	1000m
Medium	
Maximum Environment Temperature	40°C
Liquid Temperature Range	-20°C+100°C
Structure dimension	
Expolded view	ZS exploded view
Motor	
Number of Motor Phase	Three Phase
Protection Class	IP55
Insulation Class	F
Motor Power(kW)	1.5KW
Power Frequency(Hz)	60HZ
Rated Voltage (V)	380V
Rated Current (A)	3.3A
Energy Efficiency Level	IE2
Seal	
Mechanical Seal	ZS-24/BSE4
Others	
Weight (kg)	33

	Performance Curve ZS65-40-125/6 1.5	Manufacturer	Nanfang Pump Industry Co.,Ltd (CNP)
		Address	Hangzhou, Zhejiang, China
		Contact	86-571-88637351
		Date	2025/07/01
Project Name		Client Name	WEPKO
Item NO		Client Addr.	
		Contacts	
		Contact	

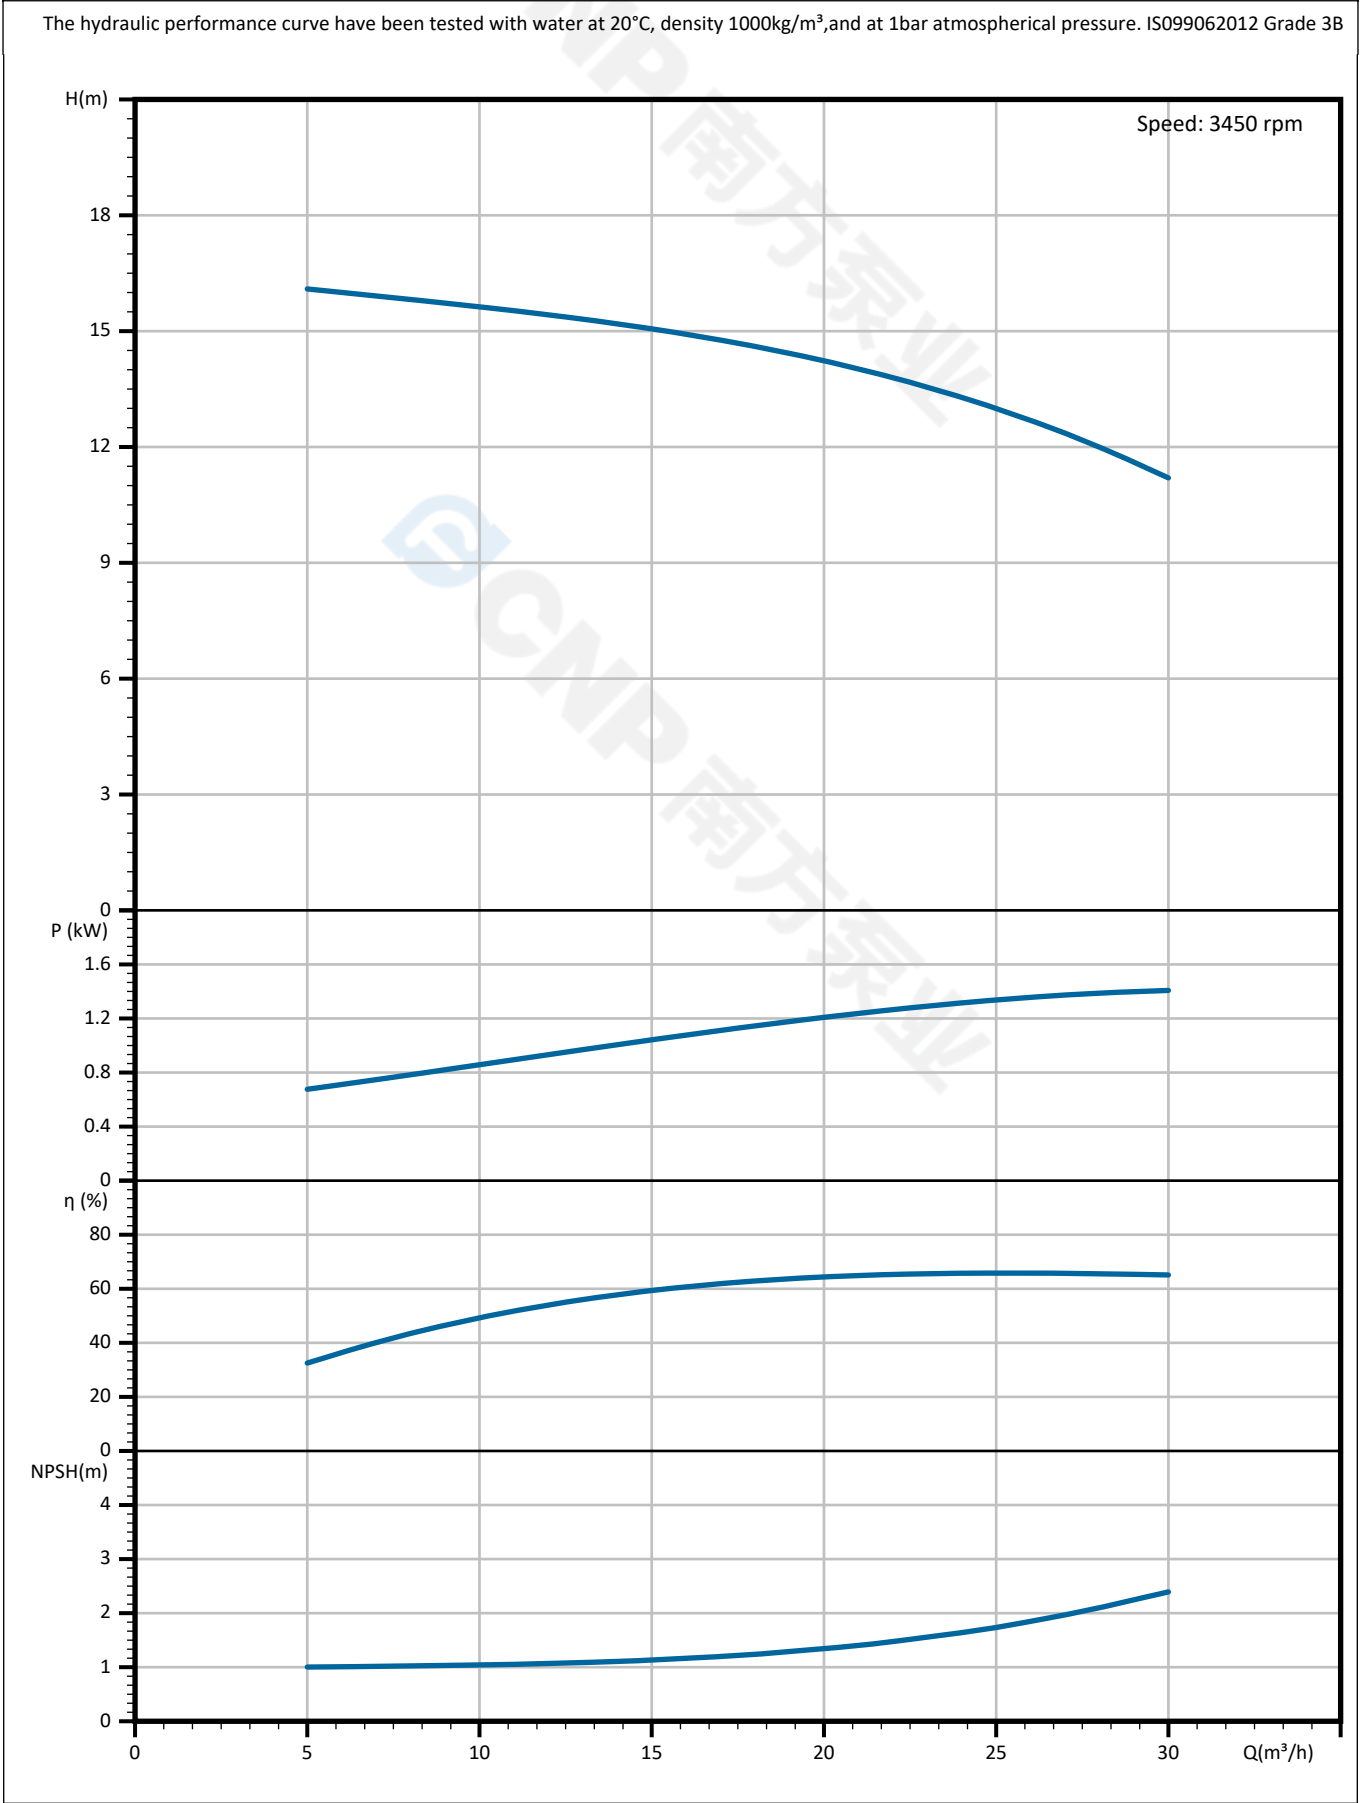


 CNP 南方泵业	Pump Technical Parameters ZS65-40-125/6 1.5	Manufacturer	Nanfang Pump Industry Co.,Ltd (CNP)
		Address	Hangzhou, Zhejiang, China
		Contact	86-571-88637351
		Date	2025/07/01
		Client Name	WEPKO
Project Name		Client Addr.	
Item NO		Contacts	
		Contact	

Rated parameters	
Pump model	ZS65-40-125/6 1.5
Part NO.	1100043850
Rated flow	25 m³/h
Rated head	13 m
Rated efficiency	68 (%)
Power (kW)	1.3 kW
NPSHr (m)	3
Speed (rpm)	3450
Max impeller diameter (mm)	102
Medium	
Pumped medium	water
Working temperature (°C)	20
Medium density (kg/m³)	1000
Viscosity (mm²/s)	1

The figure displays four performance graphs for the pump ZS65-40-125/6 1.5, plotted against flow rate Q (m³/h) on the x-axis (0 to 30). The y-axes are: Head H (m) (0 to 21), Power P (kW) (0 to 1.6), Efficiency η (%) (0 to 80), and Net Positive Suction Head NPSH (m) (0 to 4). The graphs show the relationship between these parameters and flow rate.

Q (m³/h)	H (m)	P (kW)	η (%)	NPSH (m)
5	16.5	0.7	35	1.0
10	15.5	0.9	50	1.0
15	14.5	1.1	60	1.1
20	13.5	1.2	65	1.3
25	12.5	1.3	66	1.8
30	11.5	1.4	65	2.5

	Explosed view ZS65-40-125/6 1.5	Manufacturer	Nanfang Pump Industry Co.,Ltd (CNP)
		Address	Hangzhou, Zhejiang, China
Project Name		Contact	86-571-88637351
		Date	2025/07/01
Item NO		Client Name	WEPKO
		Client Addr.	
		Contacts	
		Contact	

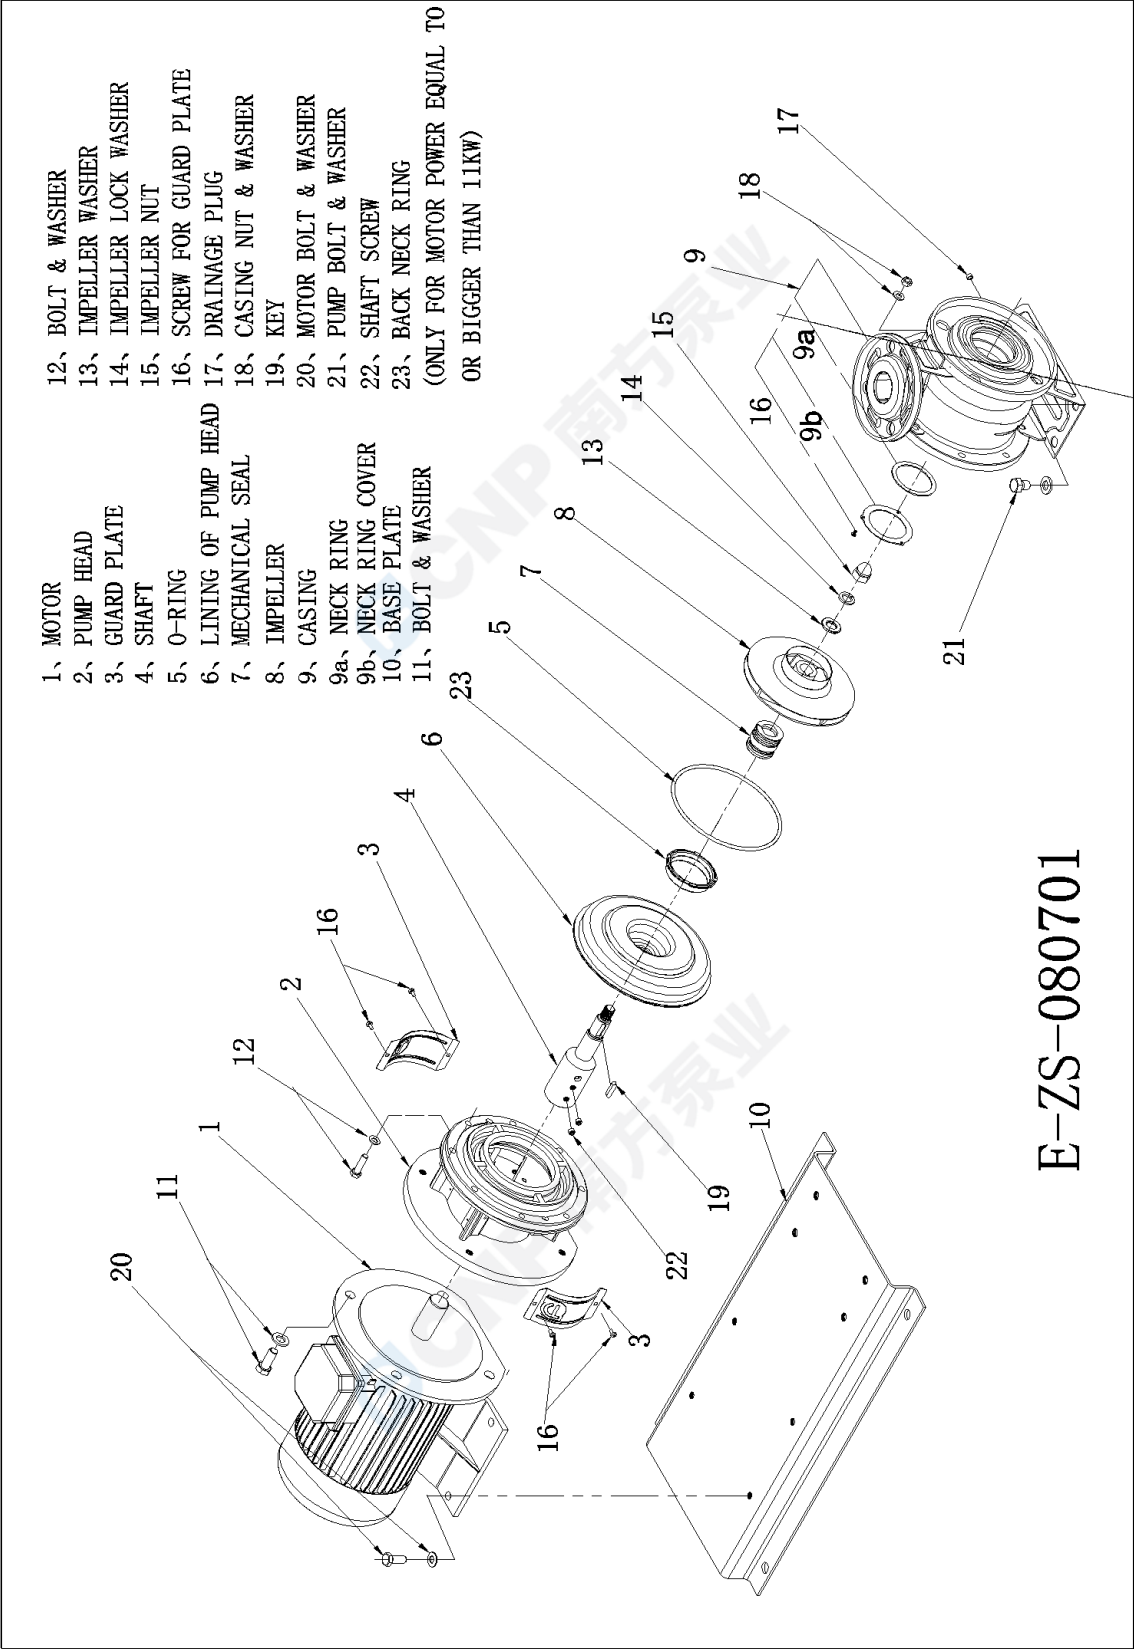

E-ZS-080701

 CNP 南方泵业	Physical picture ZS65-40-125/6 1.5	Manufacturer	Nanfang Pump Industry Co.,Ltd (CNP)
		Address	Hangzhou, Zhejiang, China
		Contact	86-571-88637351
		Date	2025/07/01
		Client Name	WEPKO
Project Name		Client Addr.	
Item NO		Contacts	
		Contact	



 CNP 南方泵业	Order Data ZS65-40-125/6 1.5	Manufacturer	Nanfang Pump Industry Co.,Ltd (CNP)
		Address	Hangzhou, Zhejiang, China
		Contact	86-571-88637351
		Date	2025/07/01
		Client Name	WEPKO
Project Name		Client Addr.	
Item NO		Contacts	
		Contact	

Pump model ZS65-40-125/6 1.5

Part NO. 1100043850

Product price

Quantity 1

Total price

Inquiry notes