


 CNP 南方泵业	Product Information ZS80-65-200/6 30.0	Manufacturer	Nanfang Pump Industry Co.,Ltd (CNP)
		Address	Hangzhou, Zhejiang, China
		Contact	86-571-88637351
		Date	2025/07/01
		Client Name	WEPKO
Project Name		Client Addr.	
Item NO		Contacts	Wepko
		Contact	


Part NO.	1100043173
Product Picture: (Note: Images may not be the same as the product)	Note
	Stainless steel horizontal single-stage centrifugal pump, the pump body is made of stainless steel plate stamping and expansion welding process, which can replace the traditional IS pump and general corrosion-resistant pump, with axial inlet and radial outlet.
Nameplate parameters	
Flow	100 m³/h
Head	68 m
Efficiency	77 %
Speed	3500 rpm
Technology	
Pump rotator speed	3500
Nameplate standards	CE
Material	
Impeller	304
Rubber code	p
Material Code	S
Installation	
Maximum Operation Pressure	10bar
Maximum Altitude	1000m
Medium	
Maximum Environment Temperature	40°C
Liquid Temperature Range	-20°C+100°C
Structure dimension	
Expolded view	ZS exploded view
Motor	
Number of Motor Phase	Three Phase
Protection Class	IP55
Insulation Class	F
Motor Power(kW)	30KW
Power Frequency(Hz)	60HZ
Rated Voltage (V)	380V
Rated Current (A)	55.7A
Energy Efficiency Level	IE2
Seal	
Mechanical Seal	ZS-32/BSE4
Others	
Weight (kg)	292

	Performance Curve ZS80-65-200/6 30.0	Manufacturer	Nanfeng Pump Industry Co.,Ltd (CNP)
		Address	Hangzhou, Zhejiang, China
		Contact	86-571-88637351
		Date	2025/07/01
Project Name		Client Name	WEPKO
Item NO		Client Addr.	
		Contacts	Wepko
		Contact	

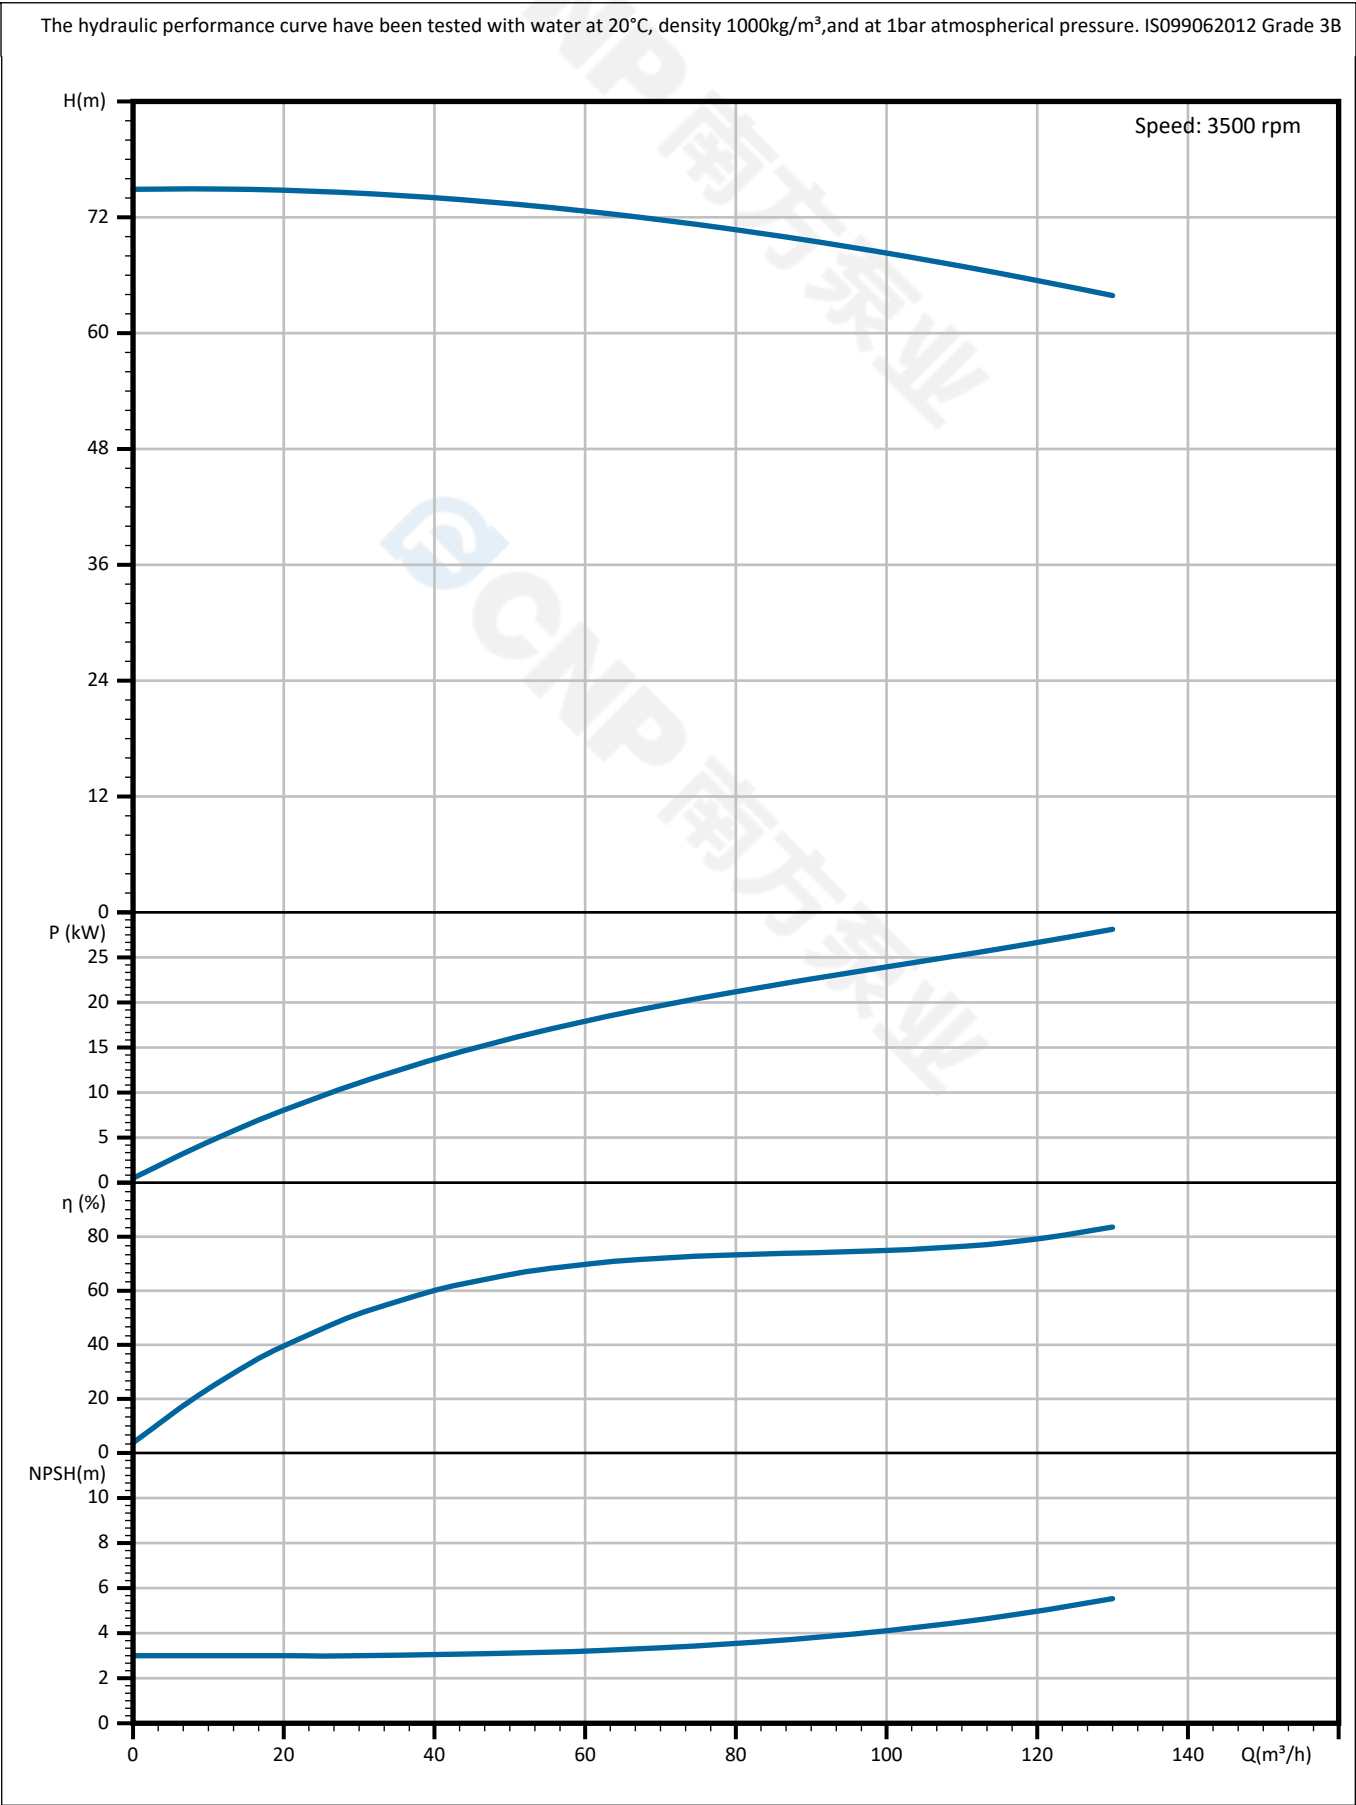


 CNP 南方泵业	Pump Technical Parameters ZS80-65-200/6 30.0	Manufacturer	Nanfang Pump Industry Co.,Ltd (CNP)
		Address	Hangzhou, Zhejiang, China
		Contact	86-571-88637351
		Date	2025/07/01
Project Name		Client Name	WEPKO
		Client Addr.	
Item NO		Contacts	Wepko
		Contact	

Rated parameters	
Pump model	ZS80-65-200/6 30.0
Part NO.	1100043173
Rated flow	100 m³/h
Rated head	68 m
Rated efficiency	77 (%)
Power (kW)	24.1 kW
NPSHr (m)	4.5
Speed (rpm)	3500
Max impeller diameter (mm)	190
Medium	
Pumped medium	water
Working temperature (°C)	20
Medium density (kg/m³)	1000
Viscosity (mm²/s)	1

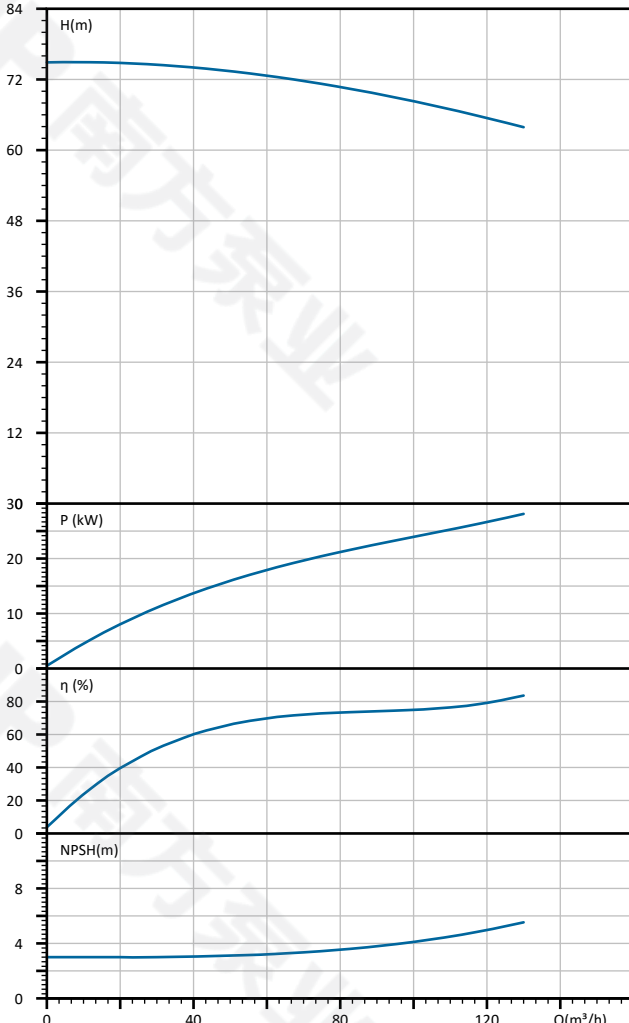


Flow Q (m³/h)	Head H (m)	Power P (kW)	Efficiency η (%)	NPSH (m)
0	75	0	10	3.0
20	74	8	40	3.0
40	72	14	60	3.2
60	70	19	70	3.5
80	68	23	75	3.8
100	66	26	77	4.2
120	64	28	78	4.8

 CNP 南方泵业	Dimension Drawing ZS80-65-200/6 30.0	Manufacturer	Nanfeng Pump Industry Co.,Ltd (CNP)
		Address	Hangzhou, Zhejiang, China
		Contact	86-571-88637351
		Date	2025/07/01
Project Name		Client Name	WEPKO
Item NO		Client Addr.	
		Contacts	Wepko
		Contact	

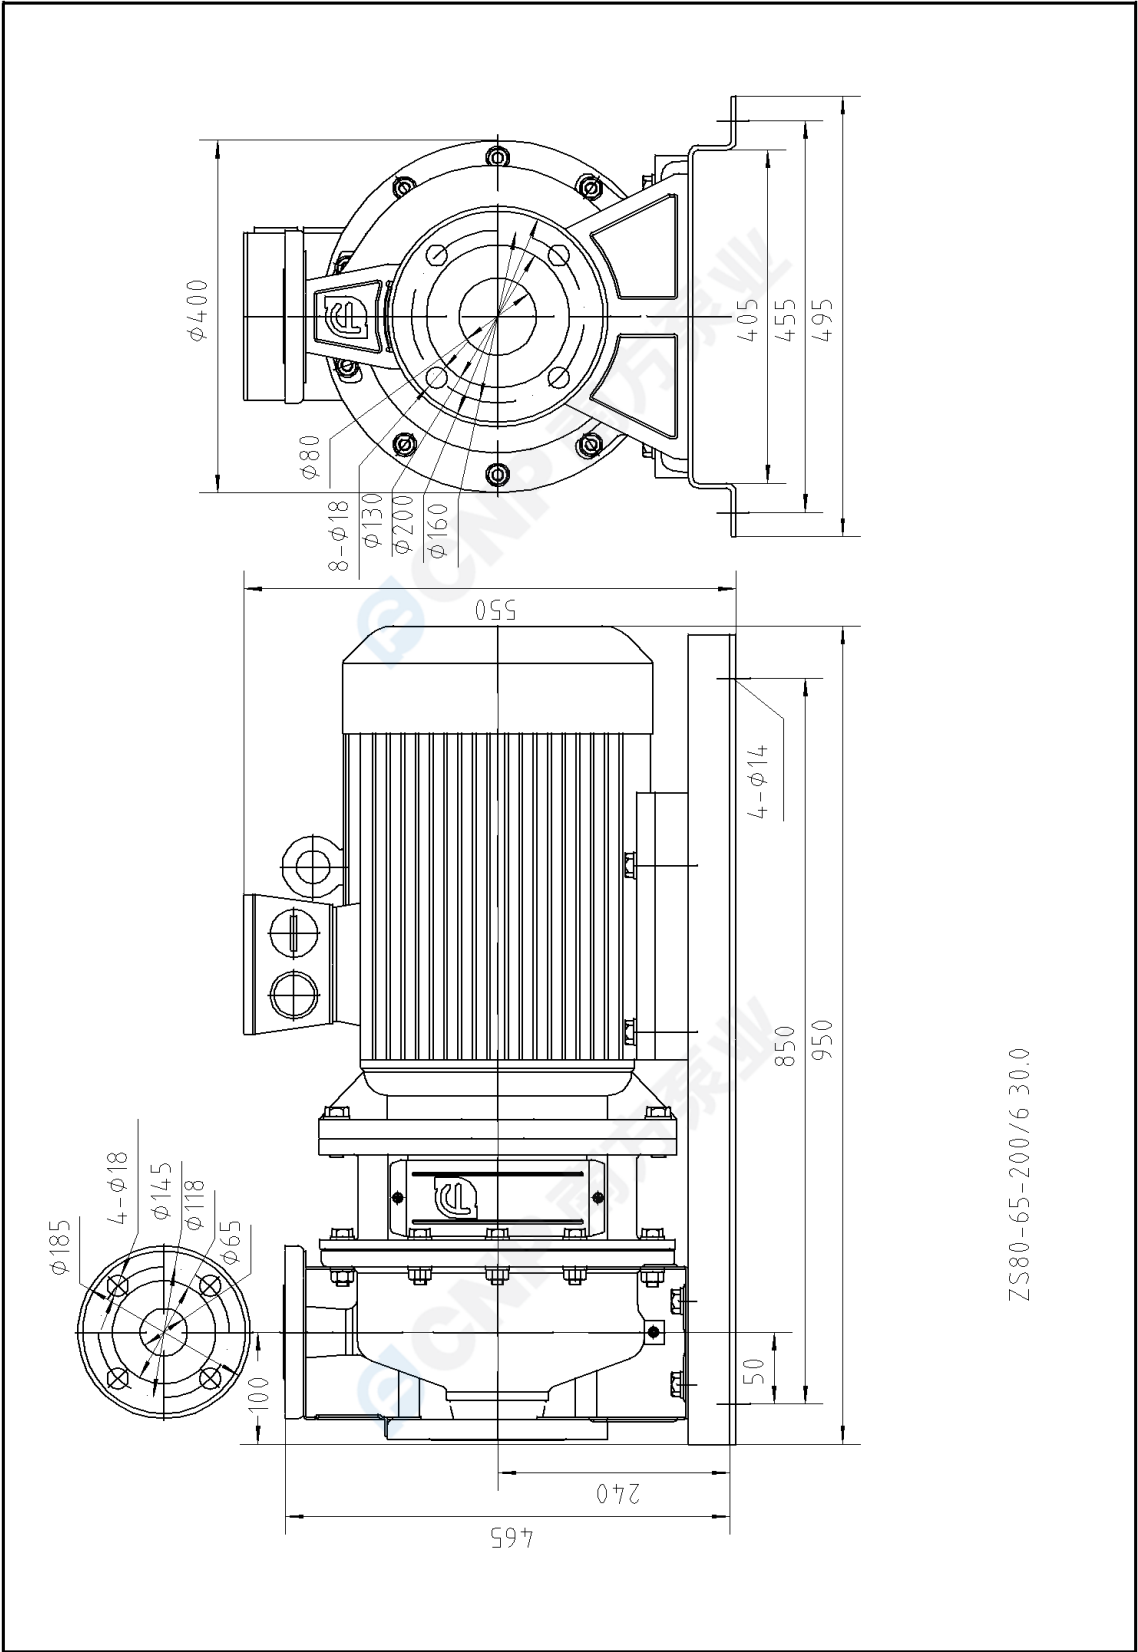

	Explosed view ZS80-65-200/6 30.0	Manufacturer	Nanfang Pump Industry Co.,Ltd (CNP)
		Address	Hangzhou, Zhejiang, China
		Contact	86-571-88637351
		Date	2025/07/01
Project Name		Client Name	WEPKO
Item NO		Client Addr.	
		Contacts	Wepko
		Contact	

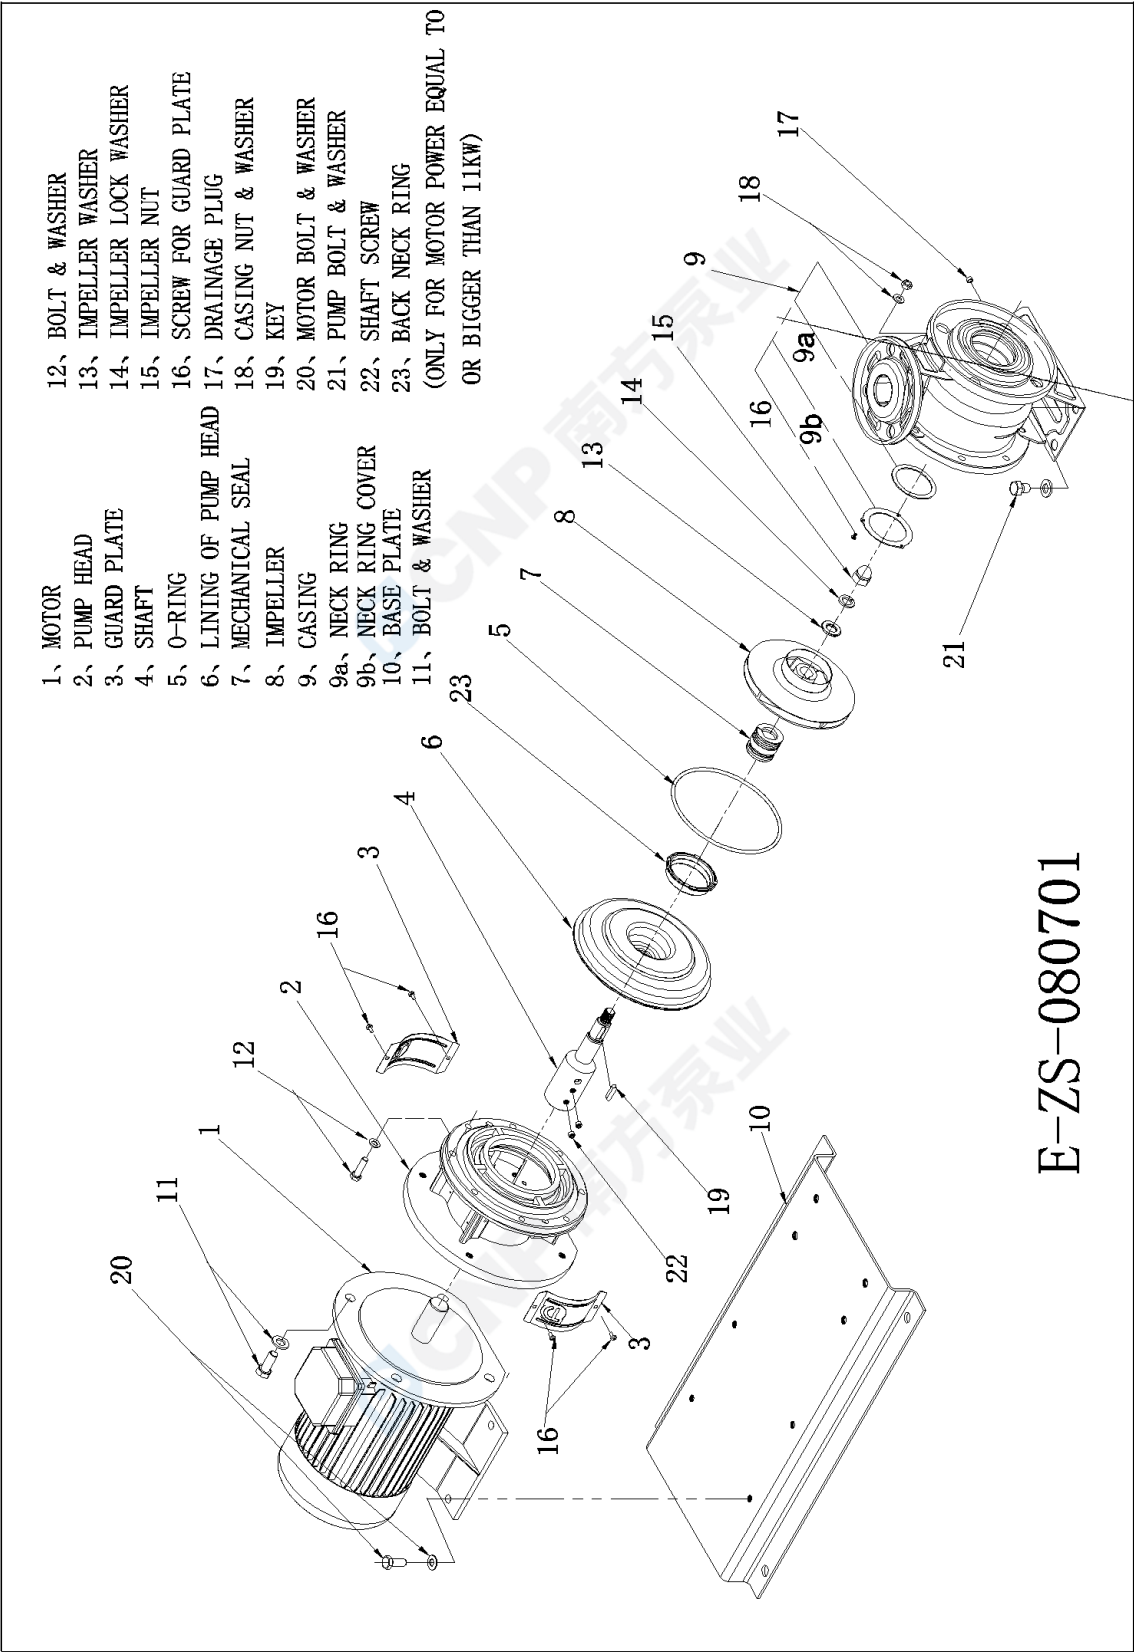

 CNP 南方泵业	Physical picture ZS80-65-200/6 30.0	Manufacturer	Nanfang Pump Industry Co.,Ltd (CNP)
		Address	Hangzhou, Zhejiang, China
		Contact	86-571-88637351
		Date	2025/07/01
		Client Name	WEPKO
Project Name		Client Addr.	
Item NO		Contacts	Wepko
		Contact	



 CNP 南方泵业	Order Data ZS80-65-200/6 30.0	Manufacturer	Nanfang Pump Industry Co.,Ltd (CNP)
		Address	Hangzhou, Zhejiang, China
		Contact	86-571-88637351
		Date	2025/07/01
		Client Name	WEPKO
Project Name		Client Addr.	
Item NO		Contacts	Wepko
		Contact	

Pump model ZS80-65-200/6 30.0

Part NO. 1100043173

Product price

Quantity 1

Total price

Inquiry notes