

Receiver
From

Company
Reference
Address
Phone
Fax
E-mail

Item n° :

60167361

Customer pos. no.:
Model :

DCP-G 80-8600/A/BAQE/37 IE3

Pump data

MEI $\geq 0,40$

Pressure rating : PN 16
Min. fluid temperature : -10°C
Max. fluid temperature : 140°C
Max. Ambient temperature : 40°C

Requested data

Flow :
Head :
Fluid (%) :
Fluid Temperature : 20°C
Density : $998,3\text{ kg/m}^3$
Kinematic viscosity : $1,005\text{ mm}^2/\text{s}$
Vapor pressure : $0,34\text{ psi}$

Real duty point

Flow :
Head :
NPSH :
Shaft power P2 :
Efficiency :

Materials

Pump body Cast iron 250 UNI ISO 185
Support Cast iron 250 UNI ISO 185
Impeller Cast iron 250 UNI ISO 185
Mechanical seal SEE "SHAFT SEAL" SECTION
O-Ring EPDM Rubber
Shaft with rotor AISI 304 X5 Cr Ni 1810 UNI 6900/71

Shaft seal



Type Rubber
Stationary part Silicon carbide
Rotating part Carbon
Elastomer EPDM

Motor data

Nominal power P2 : 1 X 37 kW
Rated speed : 2.960 1/min
Rated voltage : 3~ 400 V 50 Hz
Nominal current : 1 X 63 A
Degree of protection : IP 55

Curve tolerance according to ISO 9906

Number of working motors : 1

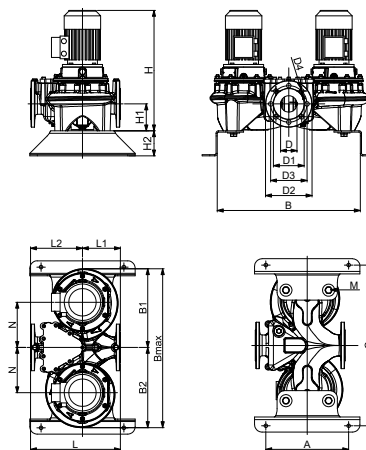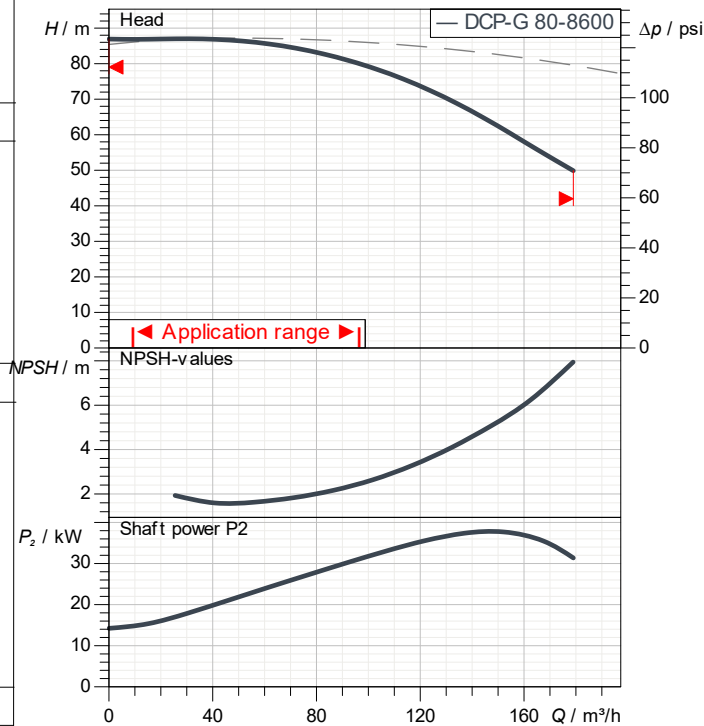
Weight : 482 kg

Dimensions in mm

A	500	D2	200	L2	340
B	804	D3	160	M	M16
B1	530	D4	8 x Ø18	N	235
B2	540	H	1.081		
Bmax	1.070	H1	115		
C	924	H2	100		
D	80	L	620		
D1	137	L1	280		

Pump connection

Suction side : DN 80 / PN 16
Discharge side : DN 80 / PN 16

Receiver


From

Company
Reference
Address
Phone
Fax
E-mail

DCP-G 80-8600/A/BAQE/37 IE3

Number of working motors : 1

Curve tolerance according to ISO 9906

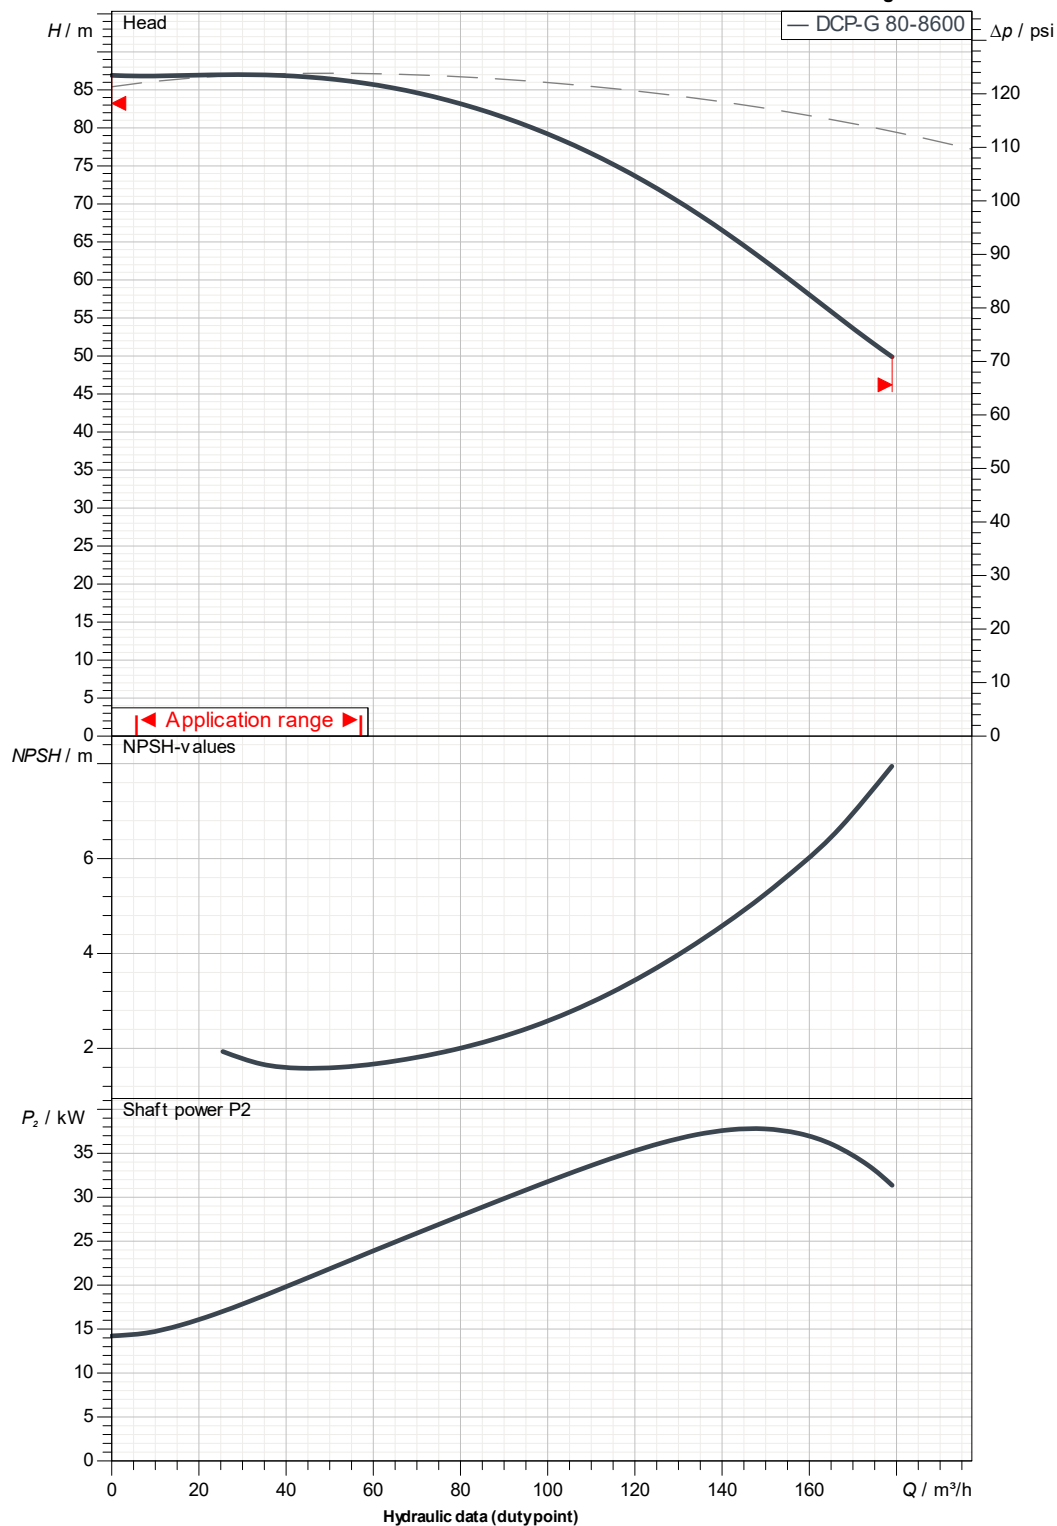

Suction side :

DN 80

PN 16

Discharge side :

DN 80

PN 16

Flow :

Head :

Rated speed :

2.960 1/min

MAIN_PROJECT_TITLE

BUSINESS_PROCESS_ID

OWNER_

ISSUE_DATE

2025-08-04



DIMENSIONAL DRAWING

2025-08-04

Page 3 / 3





DAB PUMPS S.p.A.
Via Marco Polo, 14 - 35035 Mestrino (PD), Italy
Tel. +39 049 5125000 - Fax +39 049 5125950
www.dabpumps.com

Receiver

From

Company
Reference
Address
Phone
Fax
E-mail

DCP-G 80-8600/A/BAQE/37 IE3

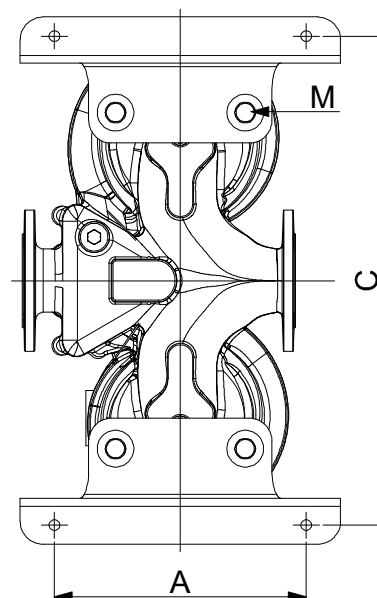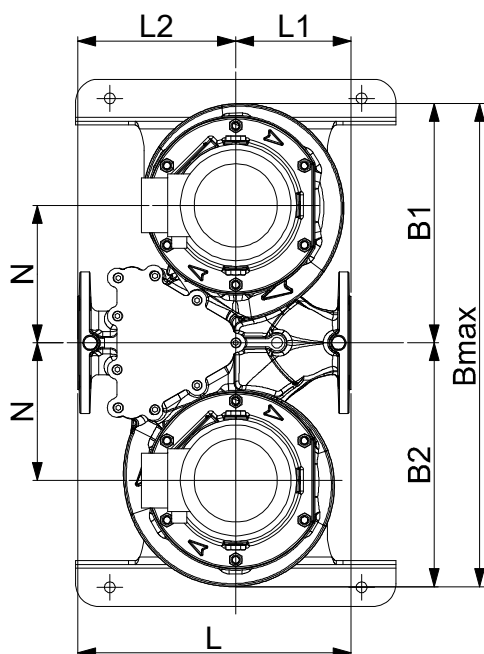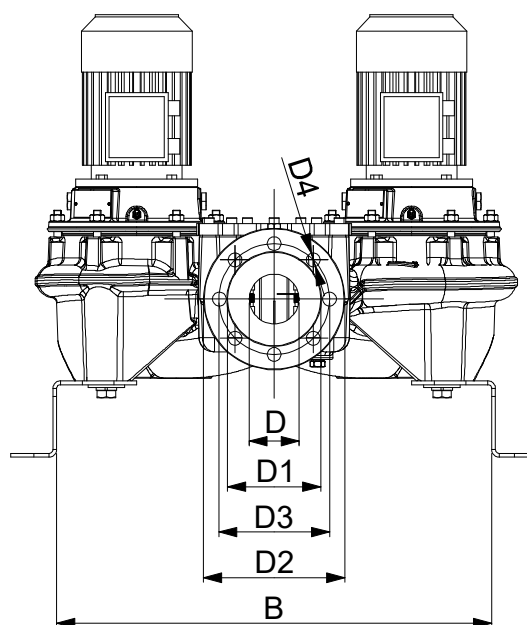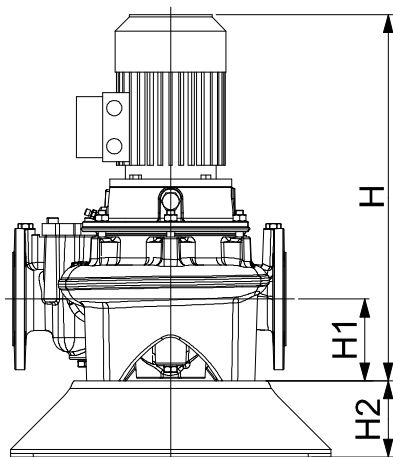

Dimensions in mm

Pump connection

1	A	500	H	1.081			
2	B	804	H1	115			Suction
3	B1	530	H2	100			DN 80
4	B2	540	L	620			PN 16
5	Bmax	1.070	L1	280			
6	C	924	L2	340			
7	D	80	M	M16			Discharge
8	D1	137	N	235			DN 80
9	D2	200					PN 16
10	D3	160					
11	D4	8 x Ø18					

MAIN_PROJECT_TITLE

BUSINESS_PROCESS_ID

OWNER_

ISSUE_DATE

2025-08-04