

Receiver
From

Company
Reference
Address
Phone
Fax
E-mail

Item n° : 60149910
Customer pos. no.:

Model :
DIVERTRON 1200 M

Pump data

Pressure rating :
Min. fluid temperature : 0 °C
Max. fluid temperature : 35 °C
Max. Ambient temperature :

Requested data

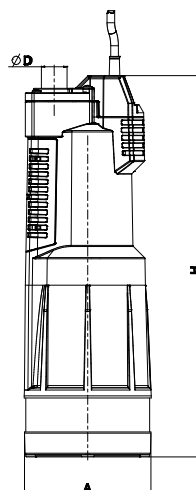
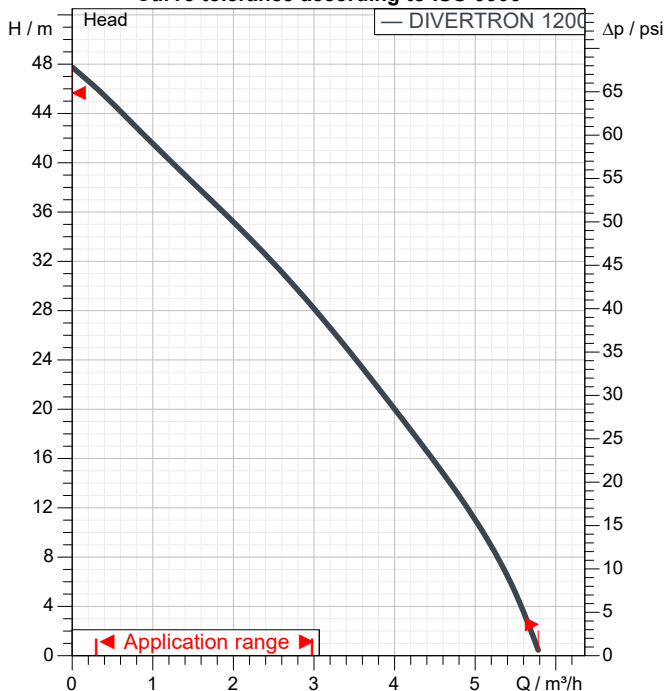
Flow :
Head :
Fluid : Water
Fluid Temperature : 20 °C
Density : 998,3 kg/m³
Kinematic viscosity : 1,005 mm²/s
Vapor pressure : 0,33938 psi

Hydraulic data (duty point)

Flow :
Head :

Materials

Pump body : Technopolymer
Impeller : Technopolymer
Diffuser : Technopolymer
O-Ring : NBR
Suction filter : Stainless Steel AISI 304
Motor shaft : AISI 416
Motor casing : Aluminium

Curve tolerance according to ISO 9906

Motor data

Motor brand : DAB
Nominal power P2 : 0,75 kW
Rated voltage : 1~ 115 V
Nominal current : 10,1 A
Number of poles : 2
Rated speed : 3.400 1/min
Degree of protection : IP 68

Weight : 11 kg

Dimensions in mm

A 150
D 30

Pump connection

Suction side : /
Discharge side : 1 " G-F / --

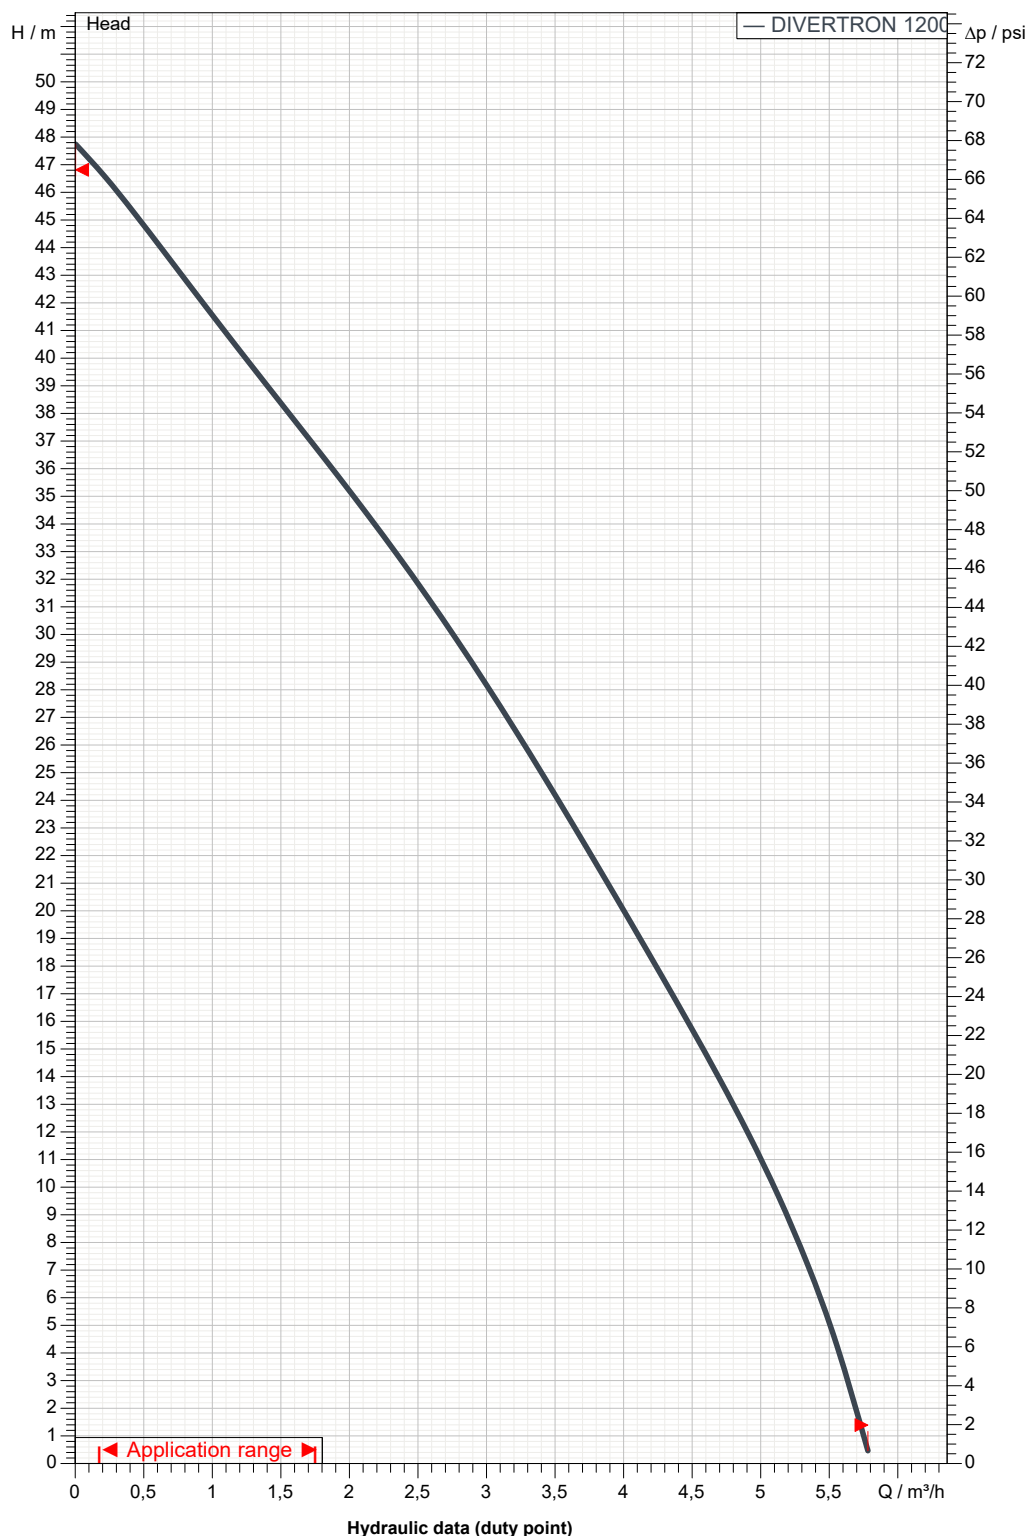
Receiver

From

Company
Reference
Address
Phone
Fax
E-mail

DIVERTRON 1200 M

Curve tolerance according to ISO 9906



Suction side :

Discharge side :

1 " G-F

--

Flow :

Head :

Rated speed :

3.400 1/min

MAIN_PROJECT_TITLE

BUSINESS_PROCESS_ID

OWNER_

ISSUE_DATE

2025-07-12

