

Receiver

From

Company
Reference
Address
Phone
Fax
E-mail

Item n° :

60214784

Model :

DKLP 65-2000/BQQE T IE3

Customer pos. no.:

Pump data

MEI $\geq 0,4$

Pressure rating : 145 psi
Min. fluid temperature : -15 °C
Max. fluid temperature : 120 °C
Max. Ambient temperature : 40 °C

Requested data

Flow :
Head :
Fluid (%) :
Fluid Temperature : 20 °C
Density : 998,3 kg/m³
Kinematic viscosity : 1,005 mm²/s
Vapor pressure : 0,34 psi

Hydraulic data (duty point)

Flow :
Head :
NPSH :
Shaft power P2 :
Efficiency :



Materials

Pump body Cast iron 250 UNI ISO 185
Support Cast iron 250 UNI ISO 185
Impeller Technopolymer B
Mechanical seal Silicon carbide/Silicon carbide
O-Ring EPDM Rubber
Shaft with rotor Stainless Steel AISI 316

Motor data

Motor brand : DAB
Nominal power P2 : 1 X 2 kW
Rated speed : 2.828 1/min
Rated voltage : 3~ 230 V 50 Hz
Nominal current : 1 X 7,7 A
Degree of protection : IP 55

Curve tolerance according to ISO 9906 Number of working motors : 1

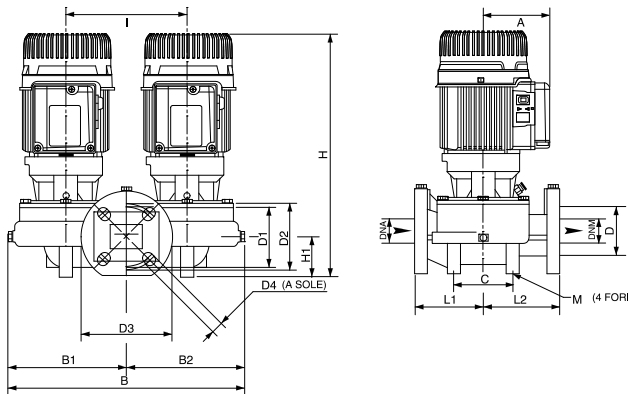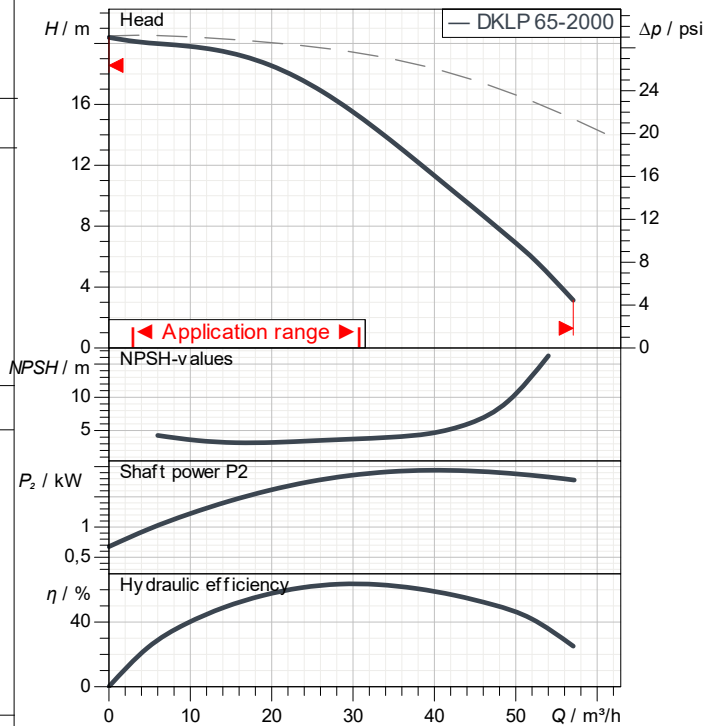

Weight : 72,5 kg

Dimensions in mm

A	118	D3	185	L1	170
B	455	D4	4 asole 18	L2	170
B1	226	DNA	65	M	4 fori 14
B2	229	DNM	65		
C	140	H	517		
D	110	H1	82		
D1	130	I	240		
D2	145	L	340		

Pump connection

Suction side : DN 65 / 145 psi
Discharge side : DN 65 / 145 psi


Receiver

From

Company
Reference
Address
Phone
Fax
E-mail

DKLP 65-2000/BQQE T IE3
Number of working motors : 1

Curve tolerance according to ISO 9906

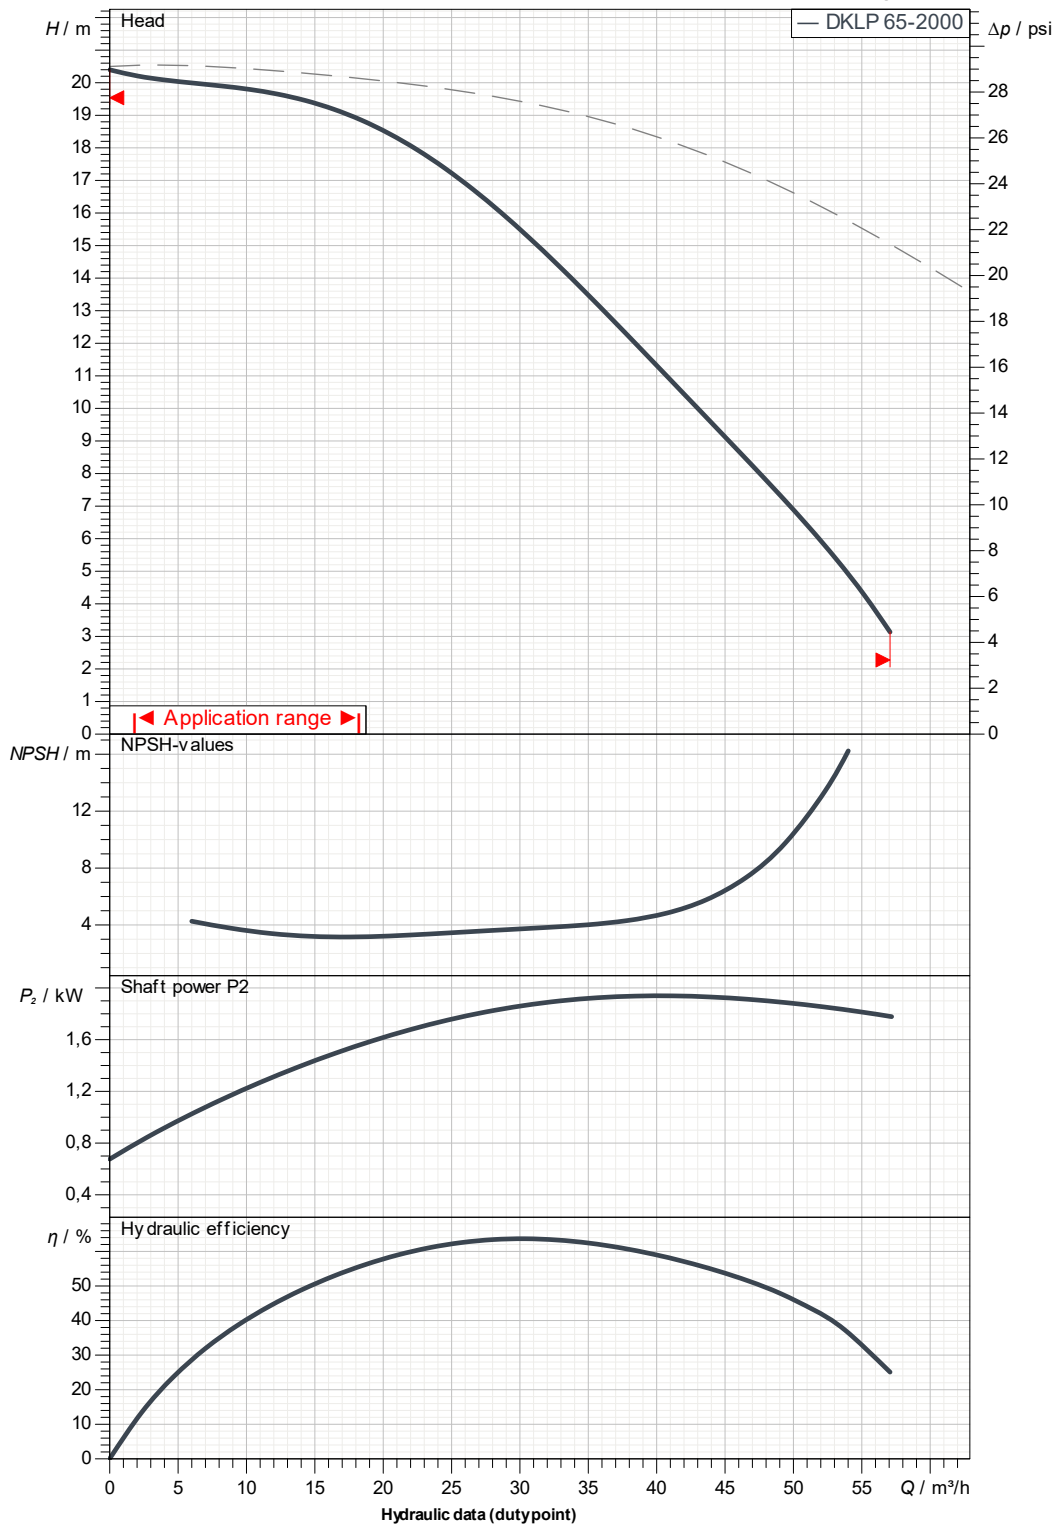

Suction side :

DN 65

145 psi

Discharge side :

DN 65

145 psi

Flow :

Head :

Rated speed :

2.828 1/min

MAIN_PROJECT_TITLE

BUSINESS_PROCESS_ID

OWNER_

ISSUE_DATE

2025-07-20

