

 CNP 南方泵业	Product Information SJ17-12	Manufacturer	Nanfang Pump Industry Co.,Ltd (CNP)
		Address	Hangzhou, Zhejiang, China
		Contact	86-571-88637351
		Date	2025/06/30
		Client Name	WEPKO
Project Name		Client Addr.	
Item NO		Contacts	Wepko
		Contact	

Part NO.	1100051539		
Product Picture: (Note: Images may not be the same as the product)		Note	
		Stainless steel multi-stage submersible pump is equipped with a submersible motor which can replace traditional long axis Deep-well pump.The pump is also equipped with a check valve to protect itself from reflux and water hammer.	

Nameplate parameters

Flow	17 m ³ /h
Head	87 m
Efficiency	66 %
Speed	2850 rpm
Number of stages	12

Material

Impeller	304
Material Code	F

Installation

Operation Pressure	26bar
Maximum Immersion Depth	70m
Maximum Operation Pressure	38bar

Medium

Medium Temperature	15~40°C
Medium PH Value	6.5~8.5
Liquid Temperature Range	+25°C

Structure dimension

Rotation Direction	Anti-clockwise rotation viewing from outlet
Explosed view	SJ17e xploded view


Motor

Number of Motor Phase	Three Phase
Protection Class	IP68
Insulation Class	F
Motor Power(kW)	7.5KW
Power Frequency(Hz)	50HZ
Rated Voltage (V)	380

Others

Weight (kg)	50
-------------	----

	Performance Curve SJ17-12	Manufacturer	Nanfang Pump Industry Co.,Ltd (CNP)
		Address	Hangzhou, Zhejiang, China
		Contact	86-571-88637351
		Date	2025/06/30
Project Name		Client Name	WEPKO
Item NO		Client Addr.	
		Contacts	Wepko
		Contact	

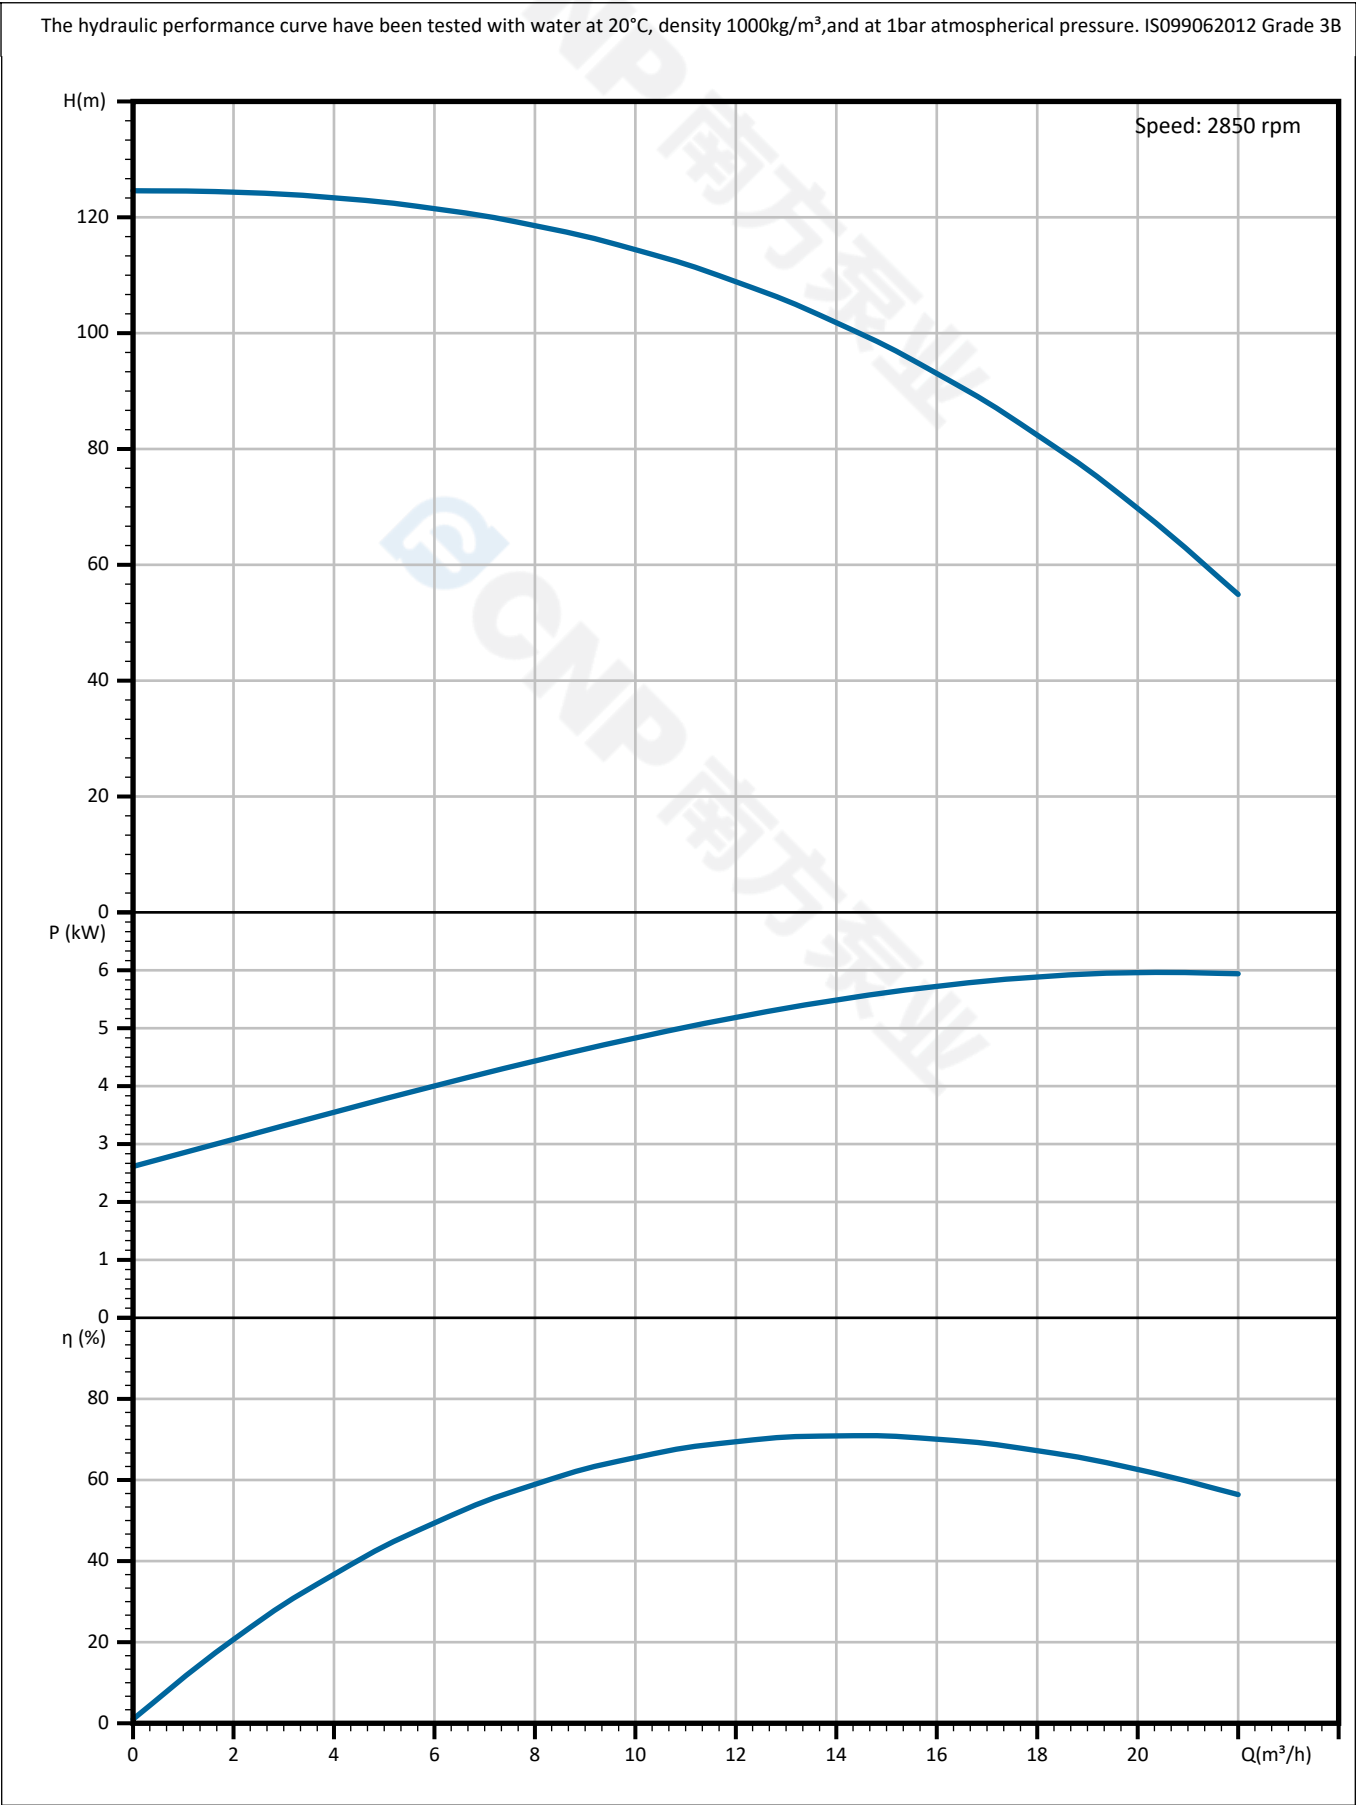


 CNP 南方泵业	Pump Technical Parameters SJ17-12	Manufacturer	Nanfang Pump Industry Co.,Ltd (CNP)
		Address	Hangzhou, Zhejiang, China
		Contact	86-571-88637351
		Date	2025/06/30
Project Name		Client Name	WEPKO
		Client Addr.	
Item NO		Contacts	Wepko
		Contact	

Rated parameters	
Pump model	SJ17-12
Part NO.	1100051539
Rated flow	17 m³/h
Rated head	87 m
Rated efficiency	66 (%)
Power (kW)	6.11 kW
Speed (rpm)	2850
Max impeller diameter (mm)	89.7
Medium	
Pumped medium	water
Working temperature (°C)	20
Medium density (kg/m³)	1000
Viscosity (mm²/s)	1


The image displays three performance graphs for the SJ17-12 pump, plotted against flow rate (Q) in m³/h on the x-axis, ranging from 0 to 20.

- Head (H) vs Flow (Q):** The head decreases as flow increases, starting at approximately 125 m at 0 m³/h and reaching about 55 m at 20 m³/h.
- Power (P) vs Flow (Q):** The power increases as flow increases, starting at approximately 2.5 kW at 0 m³/h and reaching about 6.0 kW at 20 m³/h.
- Efficiency (η) vs Flow (Q):** The efficiency increases as flow increases, starting at 0% at 0 m³/h, peaking at approximately 70% around 14 m³/h, and then slightly decreasing to about 58% at 20 m³/h.

 CNP 南方泵业	Dimension Drawing SJ17-12	Manufacturer	Nanfang Pump Industry Co.,Ltd (CNP)
		Address	Hangzhou, Zhejiang, China
		Contact	86-571-88637351
		Date	2025/06/30
Project Name		Client Name	WEPKO
		Client Addr.	
Item NO		Contacts	Wepko
		Contact	

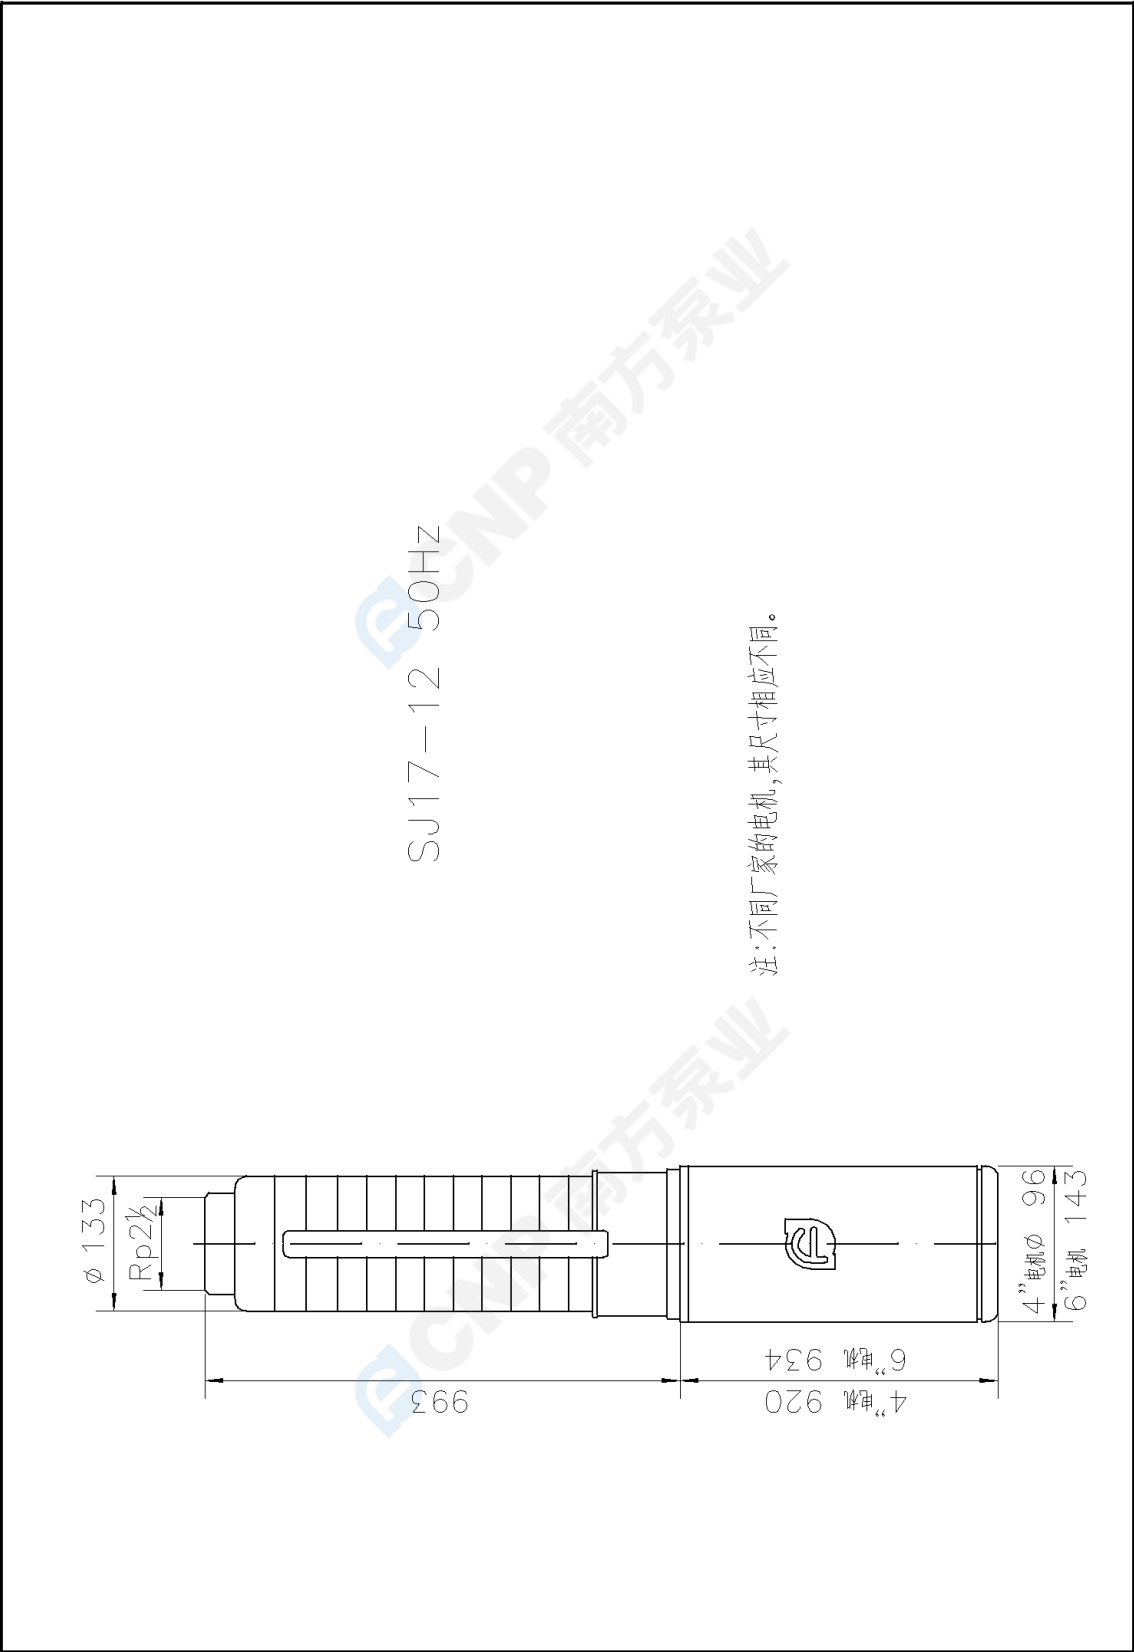

 CNP 南方泵业	Explosed view SJ17-12	Manufacturer	Nanfang Pump Industry Co.,Ltd (CNP)
		Address	Hangzhou, Zhejiang, China
		Contact	86-571-88637351
		Date	2025/06/30
Project Name		Client Name	WEPKO
Item NO		Client Addr.	
		Contacts	Wepko
		Contact	

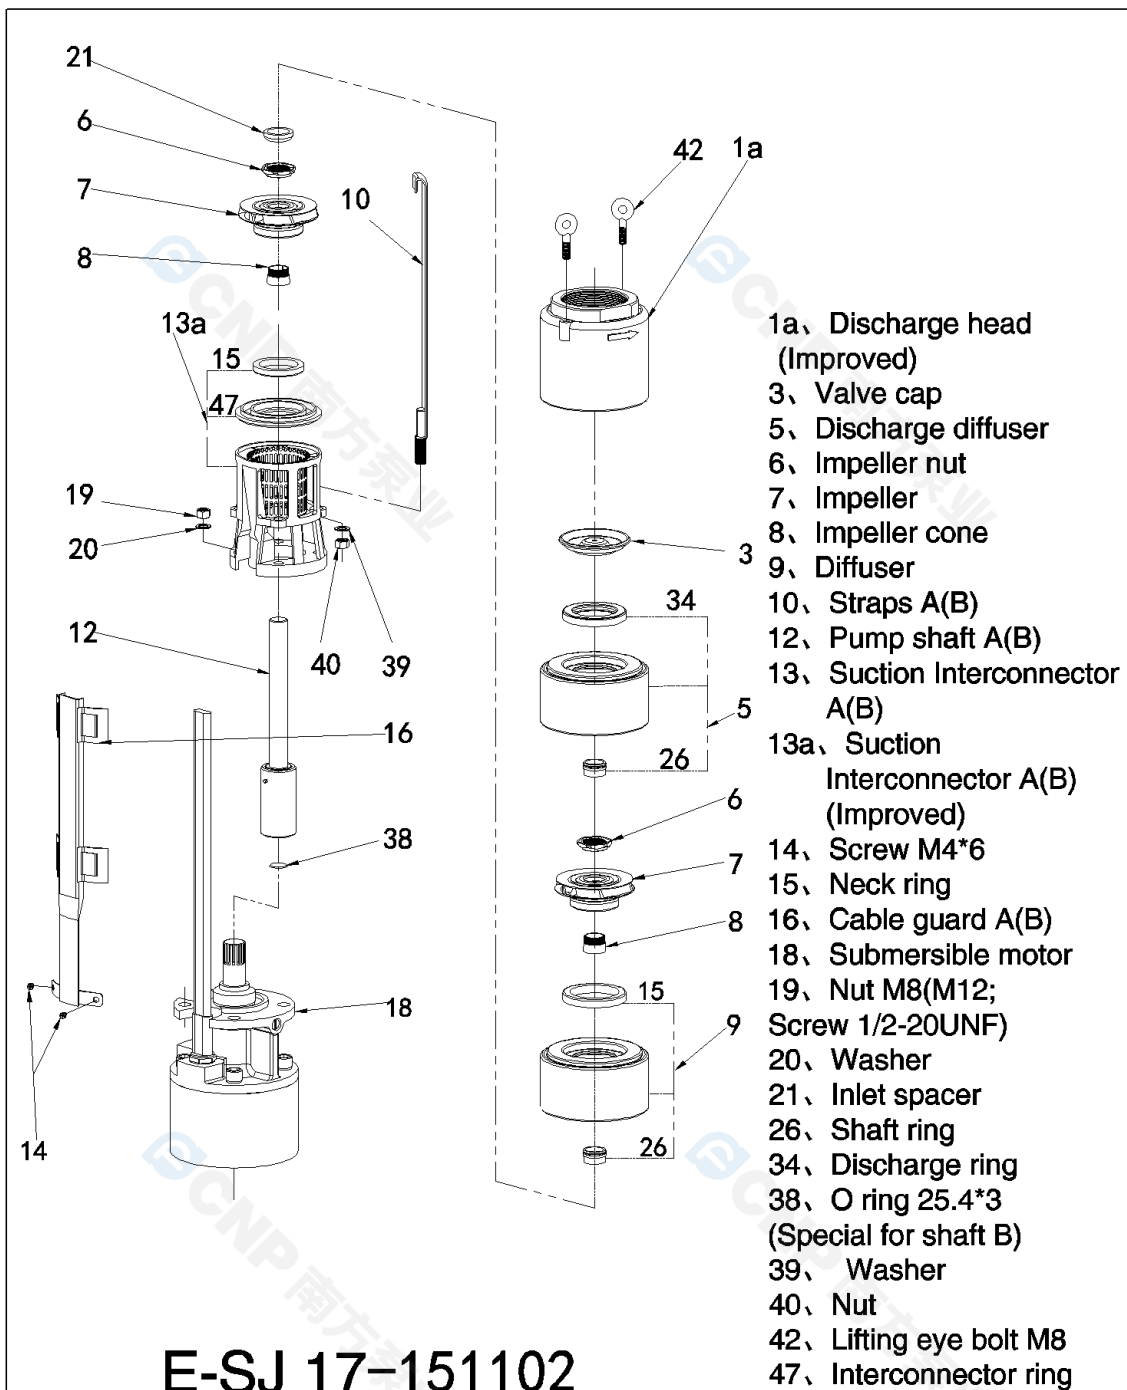

 CNP 南方泵业	Physical picture SJ17-12	Manufacturer	Nanfang Pump Industry Co.,Ltd (CNP)
		Address	Hangzhou, Zhejiang, China
		Contact	86-571-88637351
		Date	2025/06/30
		Client Name	WEPKO
Project Name		Client Addr.	
Item NO		Contacts	Wepko
		Contact	



 CNP 南方泵业	Order Data SJ17-12	Manufacturer	Nanfang Pump Industry Co.,Ltd (CNP)
		Address	Hangzhou, Zhejiang, China
		Contact	86-571-88637351
		Date	2025/06/30
		Client Name	WEPKO
Project Name		Client Addr.	
Item NO		Contacts	Wepko
		Contact	

Pump model SJ17-12
Part NO. 1100051539
Product price
Quantity 1
Total price

Inquiry notes