


 CNP 南方泵业	Product Information ZS65-50-200/6 11.0	Manufacturer	Nanfang Pump Industry Co.,Ltd (CNP)
		Address	Hangzhou, Zhejiang, China
		Contact	86-571-88637351
		Date	2025/07/01
		Client Name	WEPKO
Project Name		Client Addr.	
Item NO		Contacts	Wepko
		Contact	


Part NO.	1100042845
Product Picture: (Note: Images may not be the same as the product)	Note
	Stainless steel horizontal single-stage centrifugal pump, the pump body is made of stainless steel plate stamping and expansion welding process, which can replace the traditional IS pump and general corrosion-resistant pump, with axial inlet and radial outlet.
Nameplate parameters	
Flow	50 m ³ /h
Head	48 m
Efficiency	69 %
Speed	3500 rpm
Technology	
Pump rotator speed	3500
Nameplate standards	CE
Material	
Impeller	304
Rubber code	p
Material Code	S
Installation	
Maximum Operation Pressure	10bar
Maximum Altitude	1000m
Medium	
Maximum Environment Temperature	40°C
Liquid Temperature Range	-20°C+100°C
Structure dimension	
Expolded view	ZS exploded view
Motor	
Number of Motor Phase	Three Phase
Protection Class	IP55
Insulation Class	F
Motor Power(kW)	11KW
Power Frequency(Hz)	60HZ
Rated Voltage (V)	380V
Rated Current (A)	21A
Energy Efficiency Level	IE2
Seal	
Mechanical Seal	ZS-24/BSE4
Others	
Weight (kg)	161

	Performance Curve ZS65-50-200/6 11.0	Manufacturer	Nanfang Pump Industry Co.,Ltd (CNP)
		Address	Hangzhou, Zhejiang, China
		Contact	86-571-88637351
		Date	2025/07/01
Project Name		Client Name	WEPKO
		Client Addr.	
Item NO		Contacts	Wepko
		Contact	

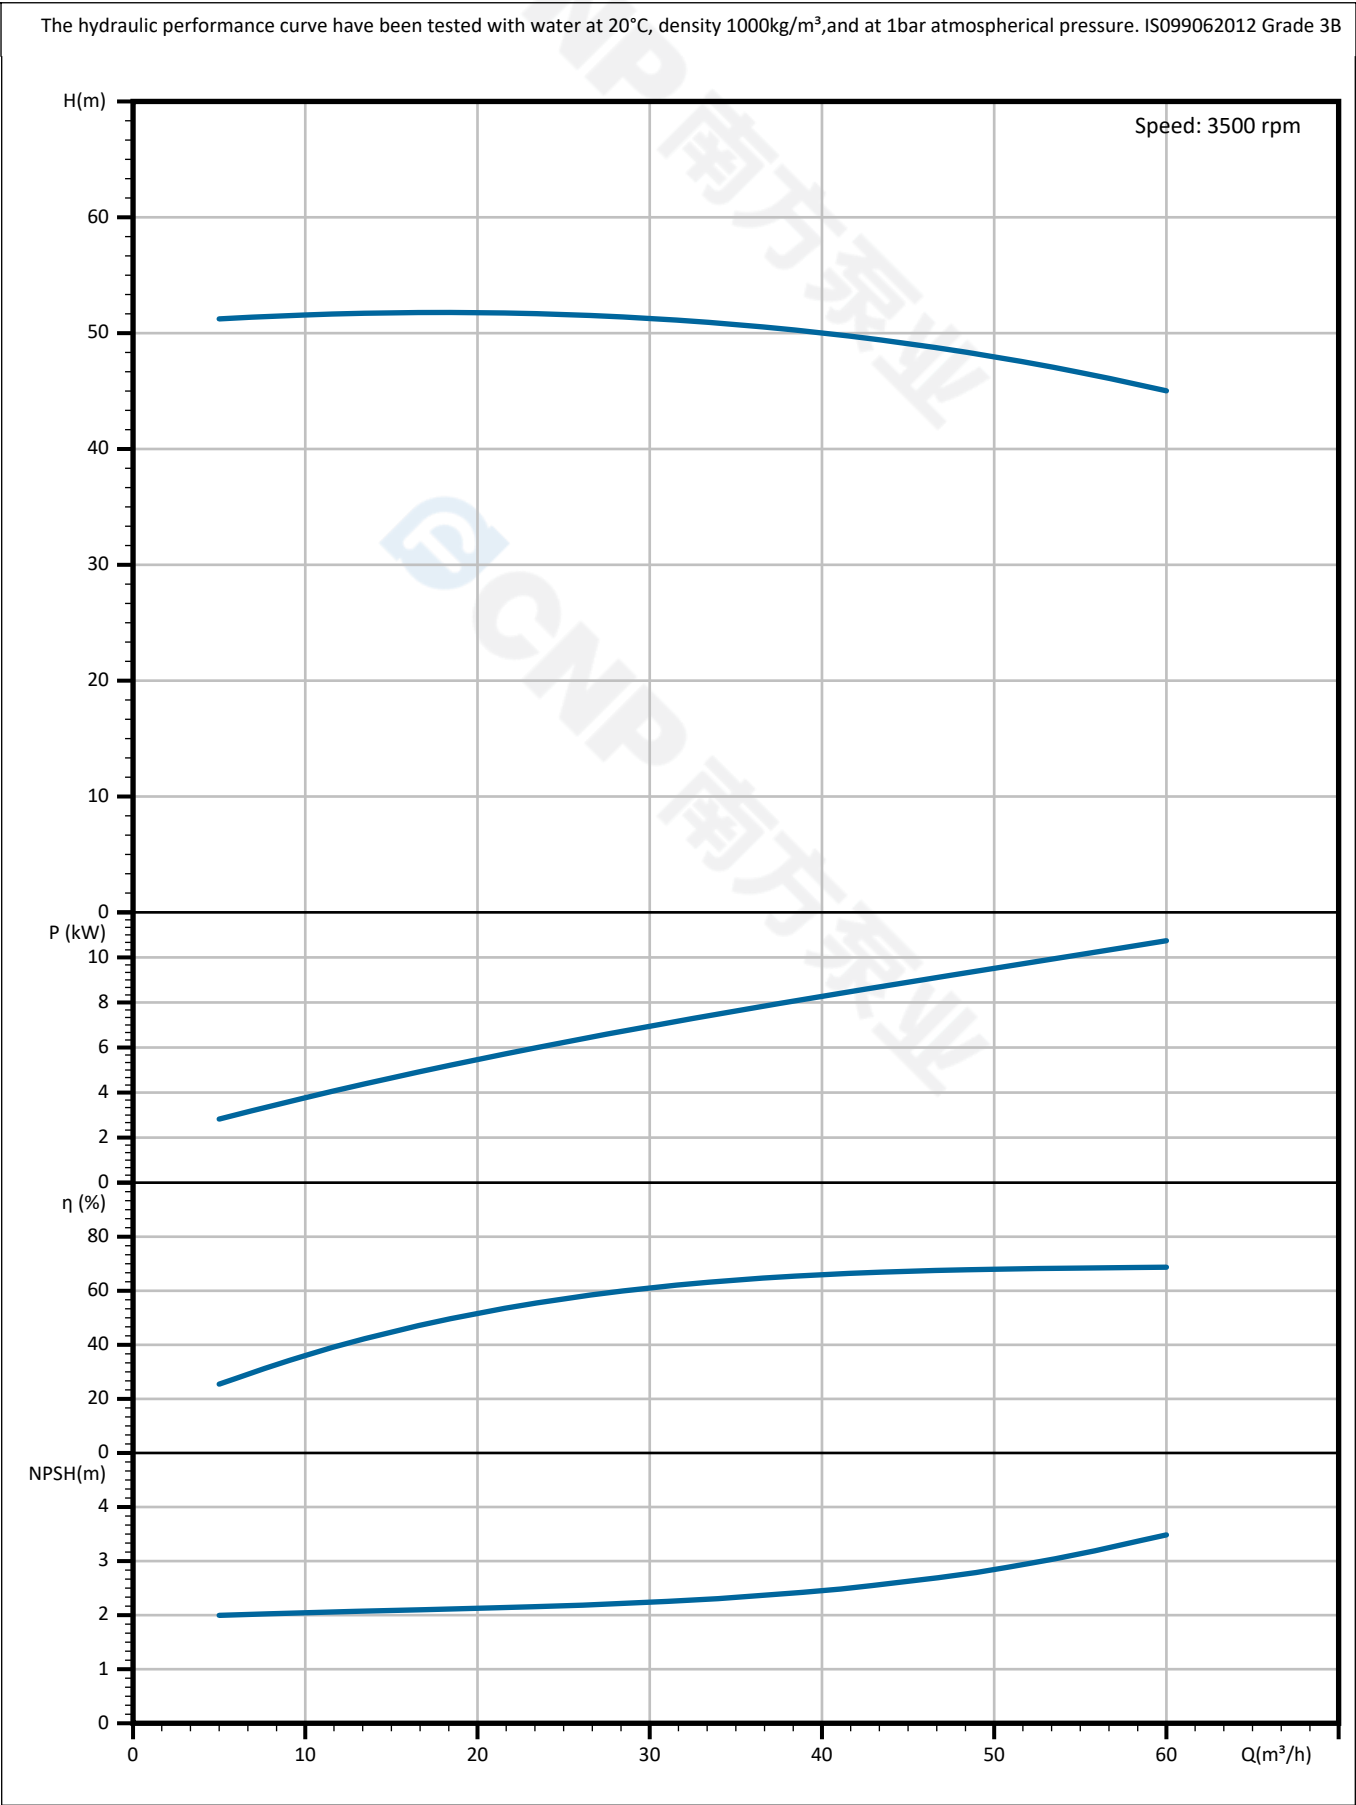

 CNP 南方泵业	Pump Technical Parameters ZS65-50-200/6 11.0	Manufacturer	Nanfang Pump Industry Co.,Ltd (CNP)
		Address	Hangzhou, Zhejiang, China
		Contact	86-571-88637351
		Date	2025/07/01
Project Name		Client Name	WEPKO
		Client Addr.	
Item NO		Contacts	Wepko
		Contact	

Rated parameters	
Pump model	ZS65-50-200/6 11.0
Part NO.	1100042845
Rated flow	50 m³/h
Rated head	48 m
Rated efficiency	69 (%)
Power (kW)	9.48 kW
NPSHr (m)	3.5
Speed (rpm)	3500
Max impeller diameter (mm)	169
Medium	
Pumped medium	water
Working temperature (°C)	20
Medium density (kg/m³)	1000
Viscosity (mm²/s)	1

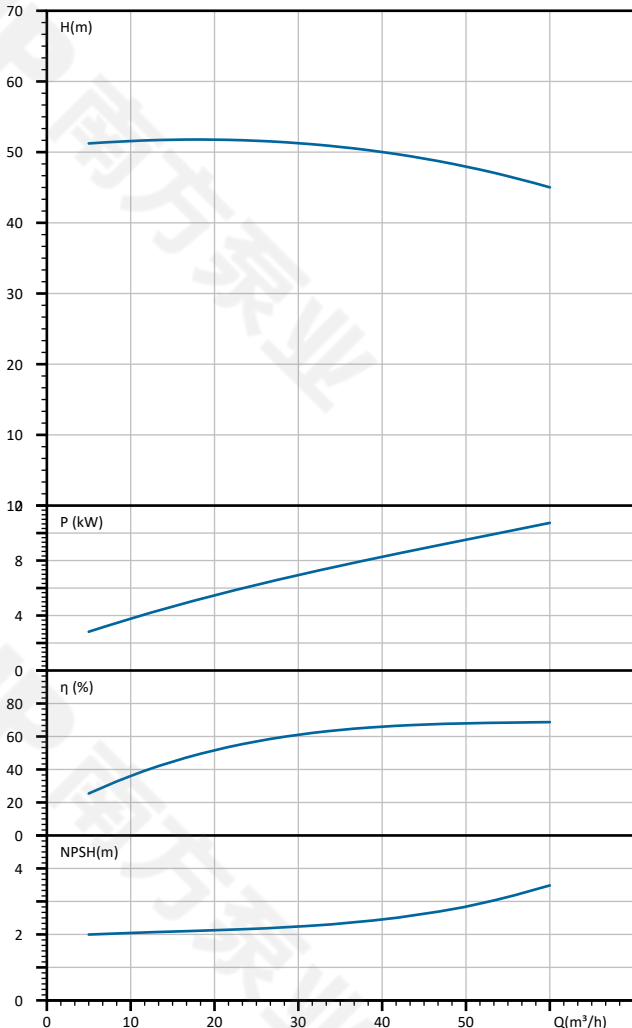


Q (m³/h)	H (m)
0	52
10	52
20	52
30	51
40	50
50	48
60	45

Q (m³/h)	P (kW)
0	3.5
10	4.5
20	5.5
30	6.5
40	7.5
50	8.5
60	9.5

Q (m³/h)	η (%)
0	25
10	40
20	55
30	65
40	68
50	69
60	70

Q (m³/h)	NPSH (m)
0	2.0
10	2.1
20	2.2
30	2.3
40	2.5
50	3.0
60	3.5

 CNP 南方泵业	Dimension Drawing ZS65-50-200/6 11.0	Manufacturer	Nanfeng Pump Industry Co.,Ltd (CNP)
		Address	Hangzhou, Zhejiang, China
		Contact	86-571-88637351
		Date	2025/07/01
Project Name		Client Name	WEPKO
Item NO		Client Addr.	
		Contacts	Wepko
		Contact	

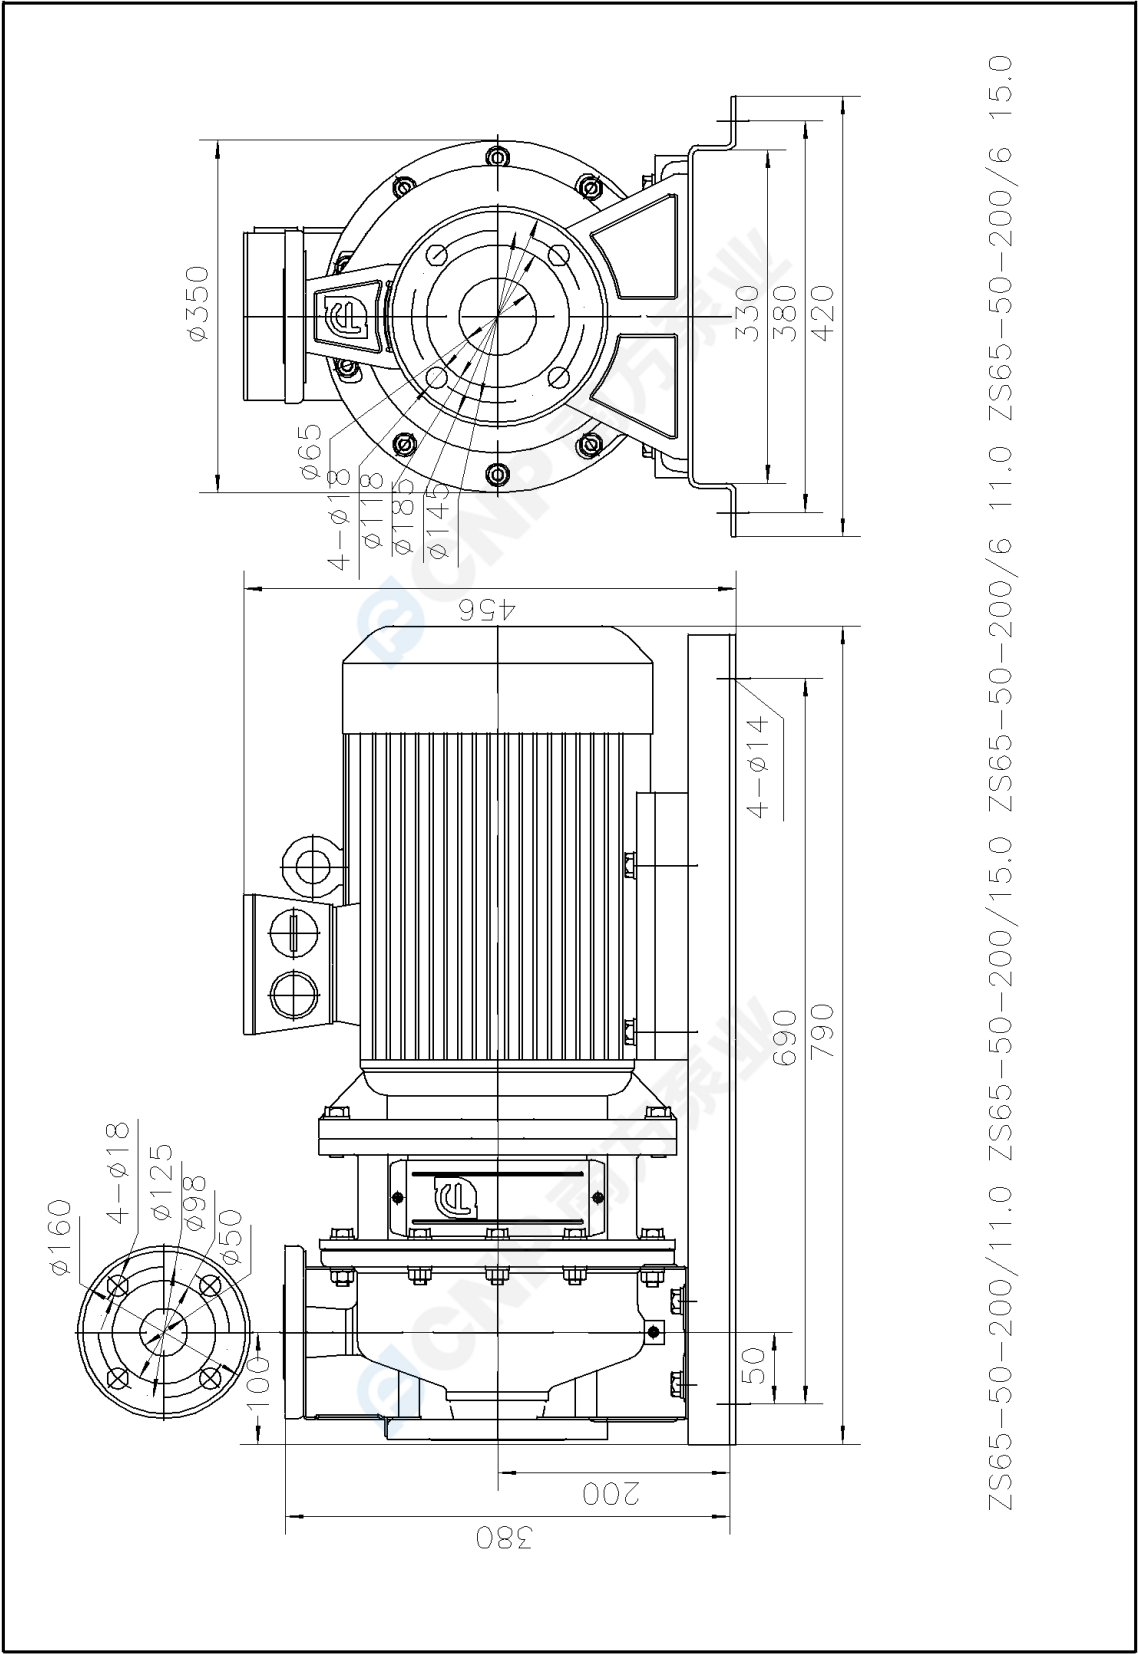

 CNP 南方泵业	Physical picture ZS65-50-200/6 11.0	Manufacturer	Nanfang Pump Industry Co.,Ltd (CNP)
		Address	Hangzhou, Zhejiang, China
		Contact	86-571-88637351
		Date	2025/07/01
		Client Name	WEPKO
Project Name		Client Addr.	
Item NO		Contacts	Wepko
		Contact	



 CNP 南方泵业	Order Data ZS65-50-200/6 11.0	Manufacturer	Nanfang Pump Industry Co.,Ltd (CNP)
		Address	Hangzhou, Zhejiang, China
		Contact	86-571-88637351
		Date	2025/07/01
		Client Name	WEPKO
Project Name		Client Addr.	
Item NO		Contacts	Wepko
		Contact	

Pump model ZS65-50-200/6 11.0

Part NO. 1100042845

Product price

Quantity 1

Total price

Inquiry notes