


 CNP 南方泵业	Product Information CDLK32-10/1-1	Manufacturer	Nanfang Pump Industry Co.,Ltd (CNP)
		Address	Hangzhou, Zhejiang, China
		Contact	86-571-88637351
		Date	2025/02/04
Project Name		Client Name	dieselpumpasia
		Client Addr.	
Item NO		Contacts	dpa
		Contact	


Part NO.	1100057014
Product Picture: (Note: Images may not be the same as the product)	Note
	Non-self-priming vertical immersion multistage centrifugal pump, the motor shaft is directly connected with the pump shaft through the coupling, and the impeller guide vane is made of stainless steel plate stamping and welding, in order to meet the installation depth of the sink or container, the cavity can be installed to change the depth of the pump immersion. Compact structure, easy maintenance, selectable installation depth, easy installation.
Nameplate parameters	
Flow	32 m³/h
Head	9 m
Efficiency	69 %
Speed	2900 rpm
Technology	
Pump rotator speed	2900
Nameplate standards	CE
Material	
Impeller	304
Rubber code	P
Material Code	S
Medium	
Medium Temperature normal temperature	-15°C+70°C
Medium Temperature high temperature	-15°C+105°C
Maximum Environment Temperature	40°C
Motor	
Number of Motor Phase	Three Phase
Protection Class	IP55
Insulation Class	F
Motor Power(kW)	1.5KW
Power Frequency(Hz)	50HZ
Rated Voltage (V)	220/380V
Rated Current (A)	5.6/3.2
Energy Efficiency Level	IE3
Seal	
Mechanical Seal	CDLA-22/WSF14
Others	
Weight (kg)	45
Structure dimension	
Expolded view	CDLK(F)32,42exploded view

	Performance Curve CDLK32-10/1-1	Manufacturer	Nanfang Pump Industry Co.,Ltd (CNP)
		Address	Hangzhou, Zhejiang, China
		Contact	86-571-88637351
		Date	2025/02/04
Project Name		Client Name	dieselpumpasia
Item NO		Client Addr.	
		Contacts	dpa
		Contact	

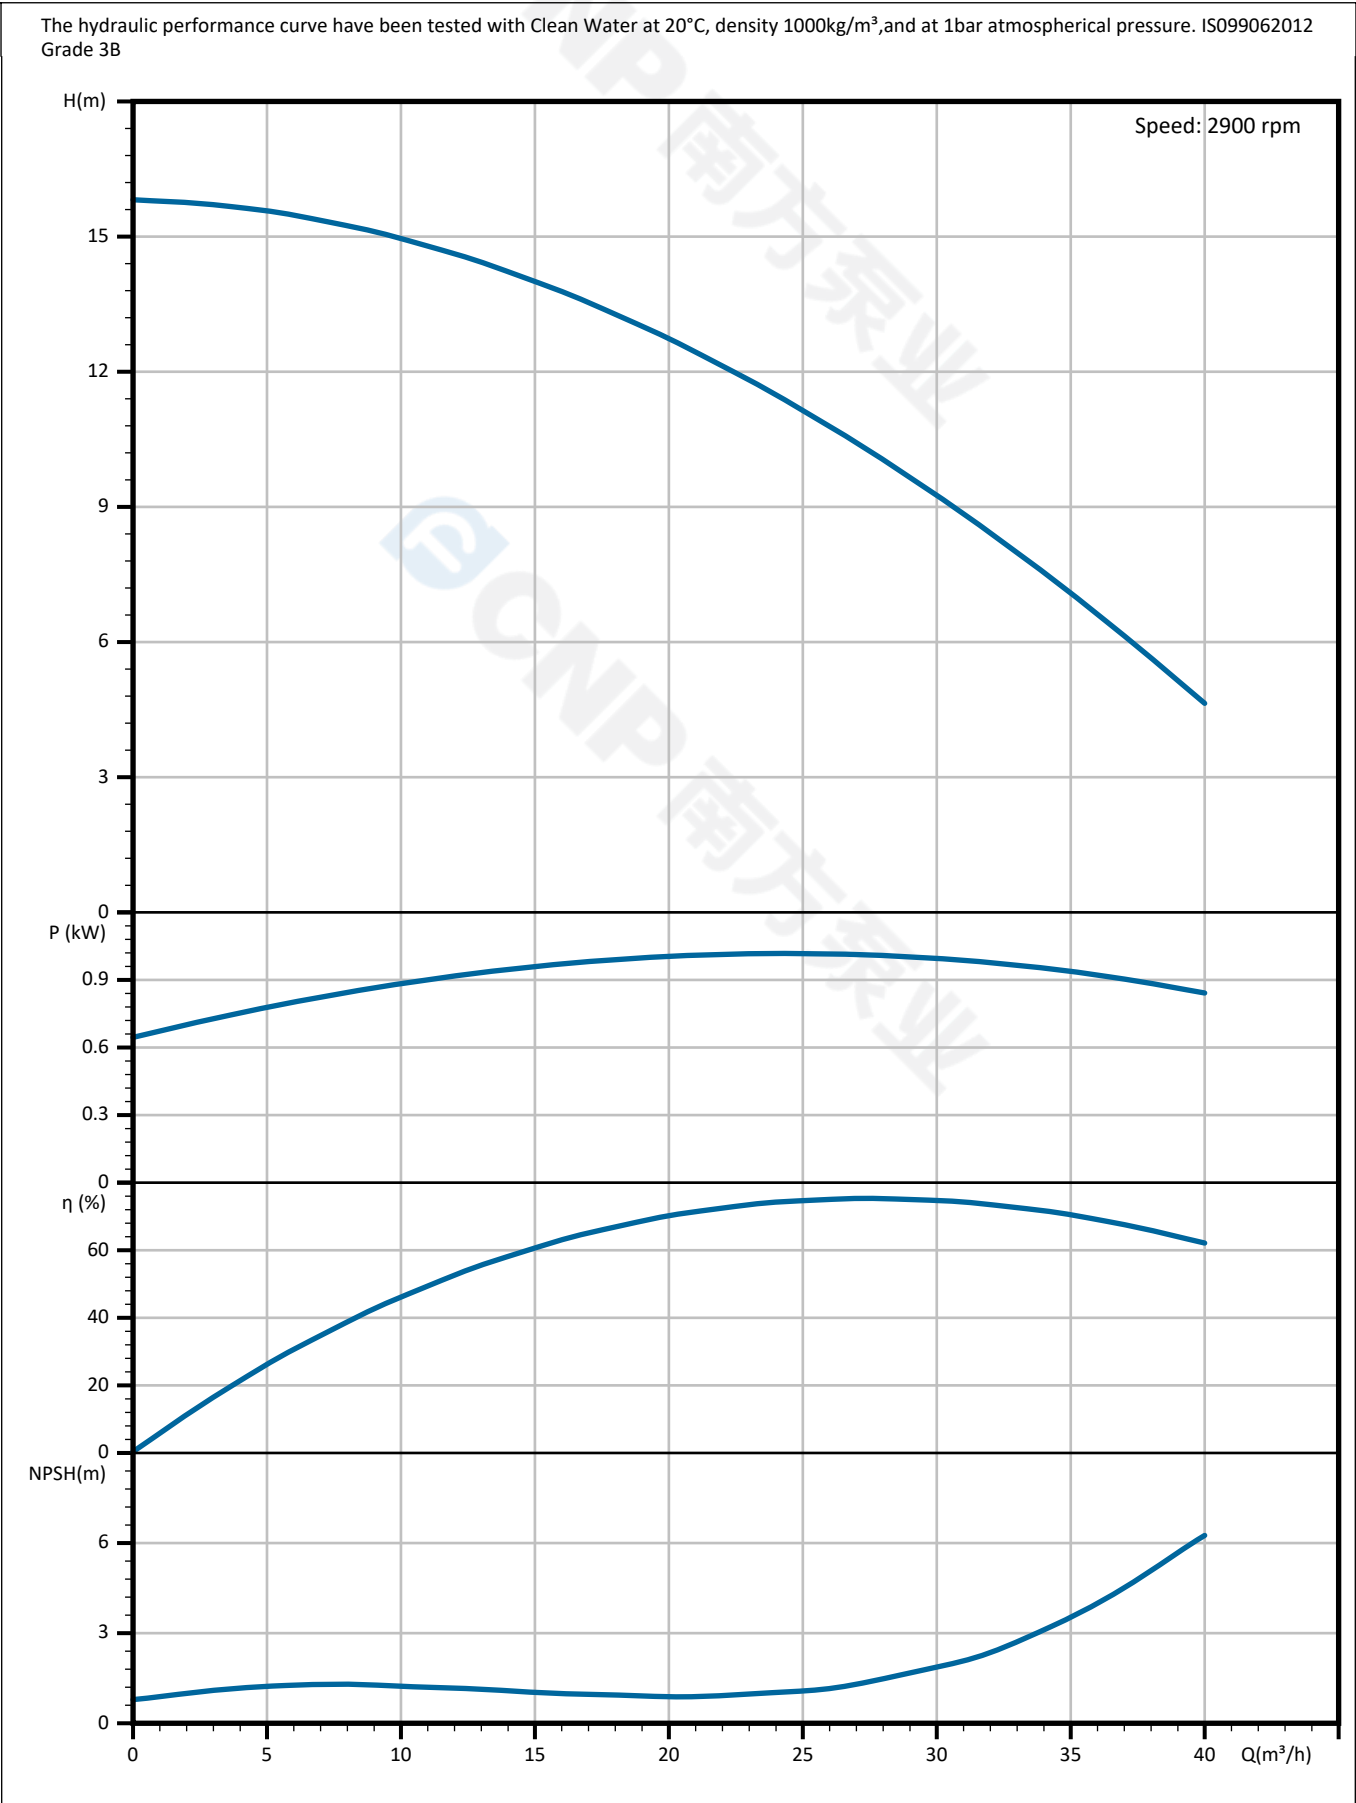

 CNP 南方泵业	Pump Technical Parameters CDLK32-10/1-1	Manufacturer	Nanfang Pump Industry Co.,Ltd (CNP)
		Address	Hangzhou, Zhejiang, China
		Contact	86-571-88637351
		Date	2025/02/04
Project Name		Client Name	dieselpumpasia
		Client Addr.	
Item NO		Contacts	dpa
		Contact	

Rated parameters	
Pump model	CDLK32-10/1-1
Part NO.	1100057014
Rated flow	32 m³/h
Rated head	9 m
Rated efficiency	69 (%)
Power (kW)	1.14 kW
NPSHr (m)	3
Speed (rpm)	2900
Max impeller diameter (mm)	118
Medium	
Pumped medium	Clean Water
Working temperature (°C)	20
Medium density (kg/m³)	1000
Viscosity (mm²/s)	1

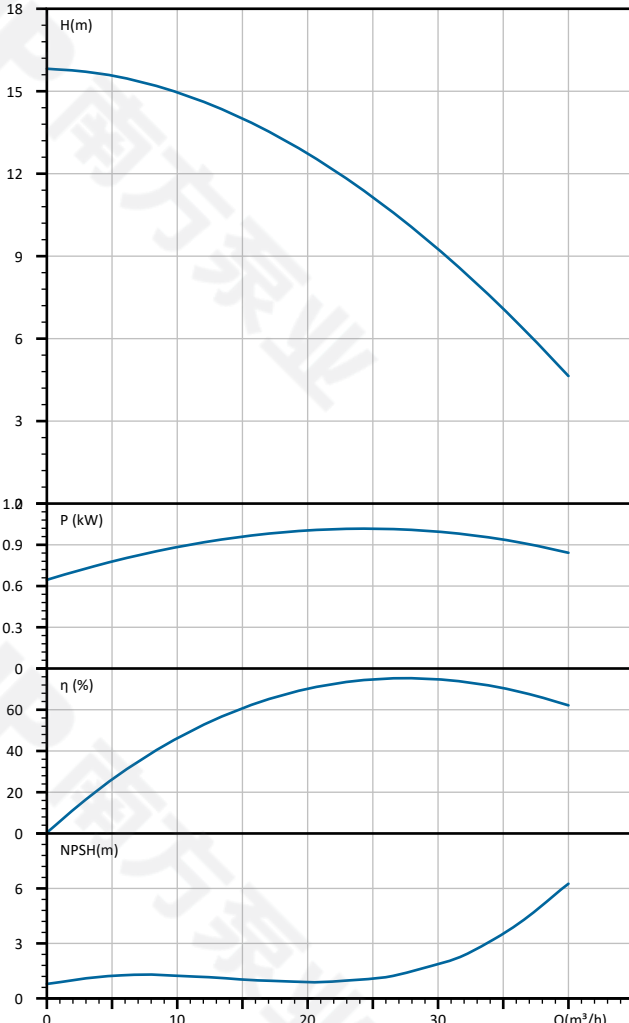


Q (m³/h)	H (m)
0	16.0
10	15.0
20	13.0
30	10.0
40	7.0
50	5.0

Q (m³/h)	P (kW)
0	0.65
10	0.85
20	0.95
30	0.95
40	0.90
50	0.85


Q (m³/h)	η (%)
0	0
10	45
20	75
30	85
40	80
50	65

Q (m³/h)	NPSH (m)
0	1.0
10	1.5
20	1.2
30	2.0
40	4.0
50	6.0

 CNP 南方泵业	Dimension Drawing CDLK32-10/1-1	Manufacturer	Nanfang Pump Industry Co.,Ltd (CNP)
		Address	Hangzhou, Zhejiang, China
		Contact	86-571-88637351
		Date	2025/02/04
Project Name		Client Name	dieselpumpasia
Item NO		Client Addr.	
		Contacts	dpa
		Contact	

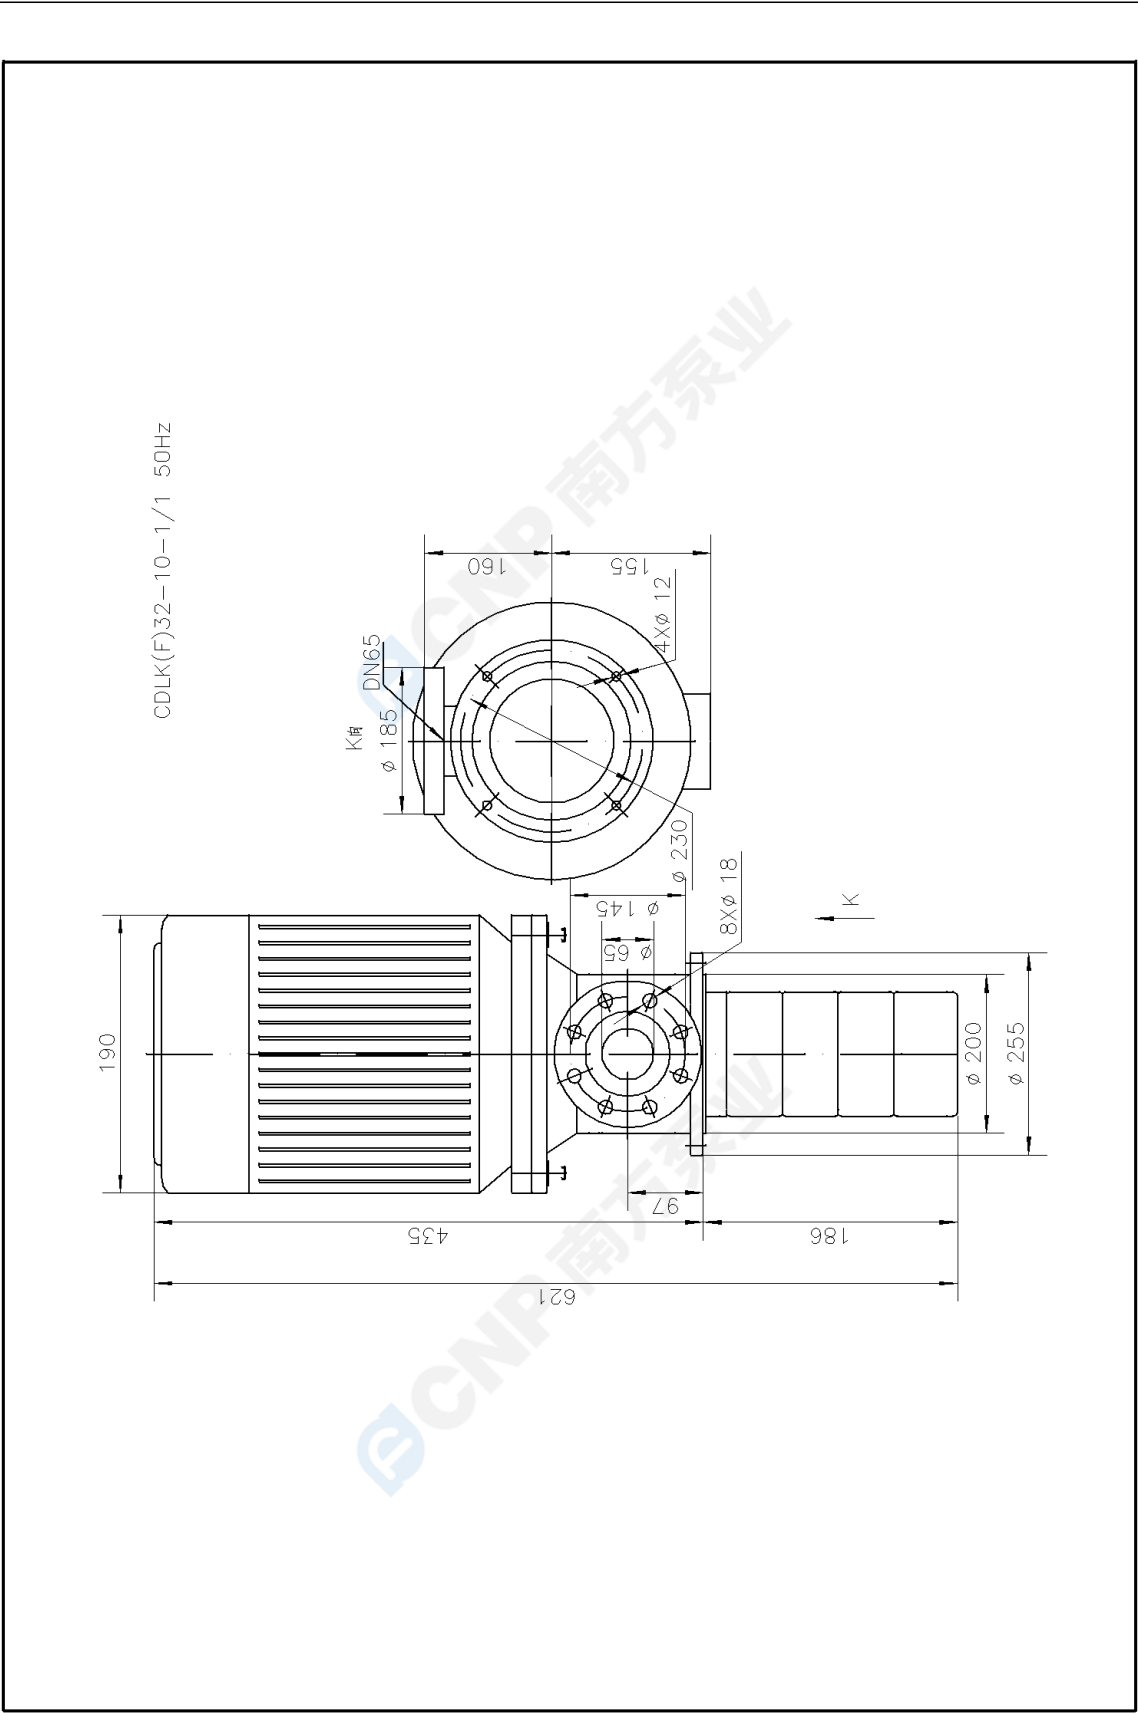

 CNP 南方泵业	Explosed view CDLK32-10/1-1	Manufacturer	Nanfang Pump Industry Co.,Ltd (CNP)
		Address	Hangzhou, Zhejiang, China
		Contact	86-571-88637351
		Date	2025/02/04
Project Name		Client Name	dieselpumpasia
Item NO		Client Addr.	
		Contacts	dpa
		Contact	

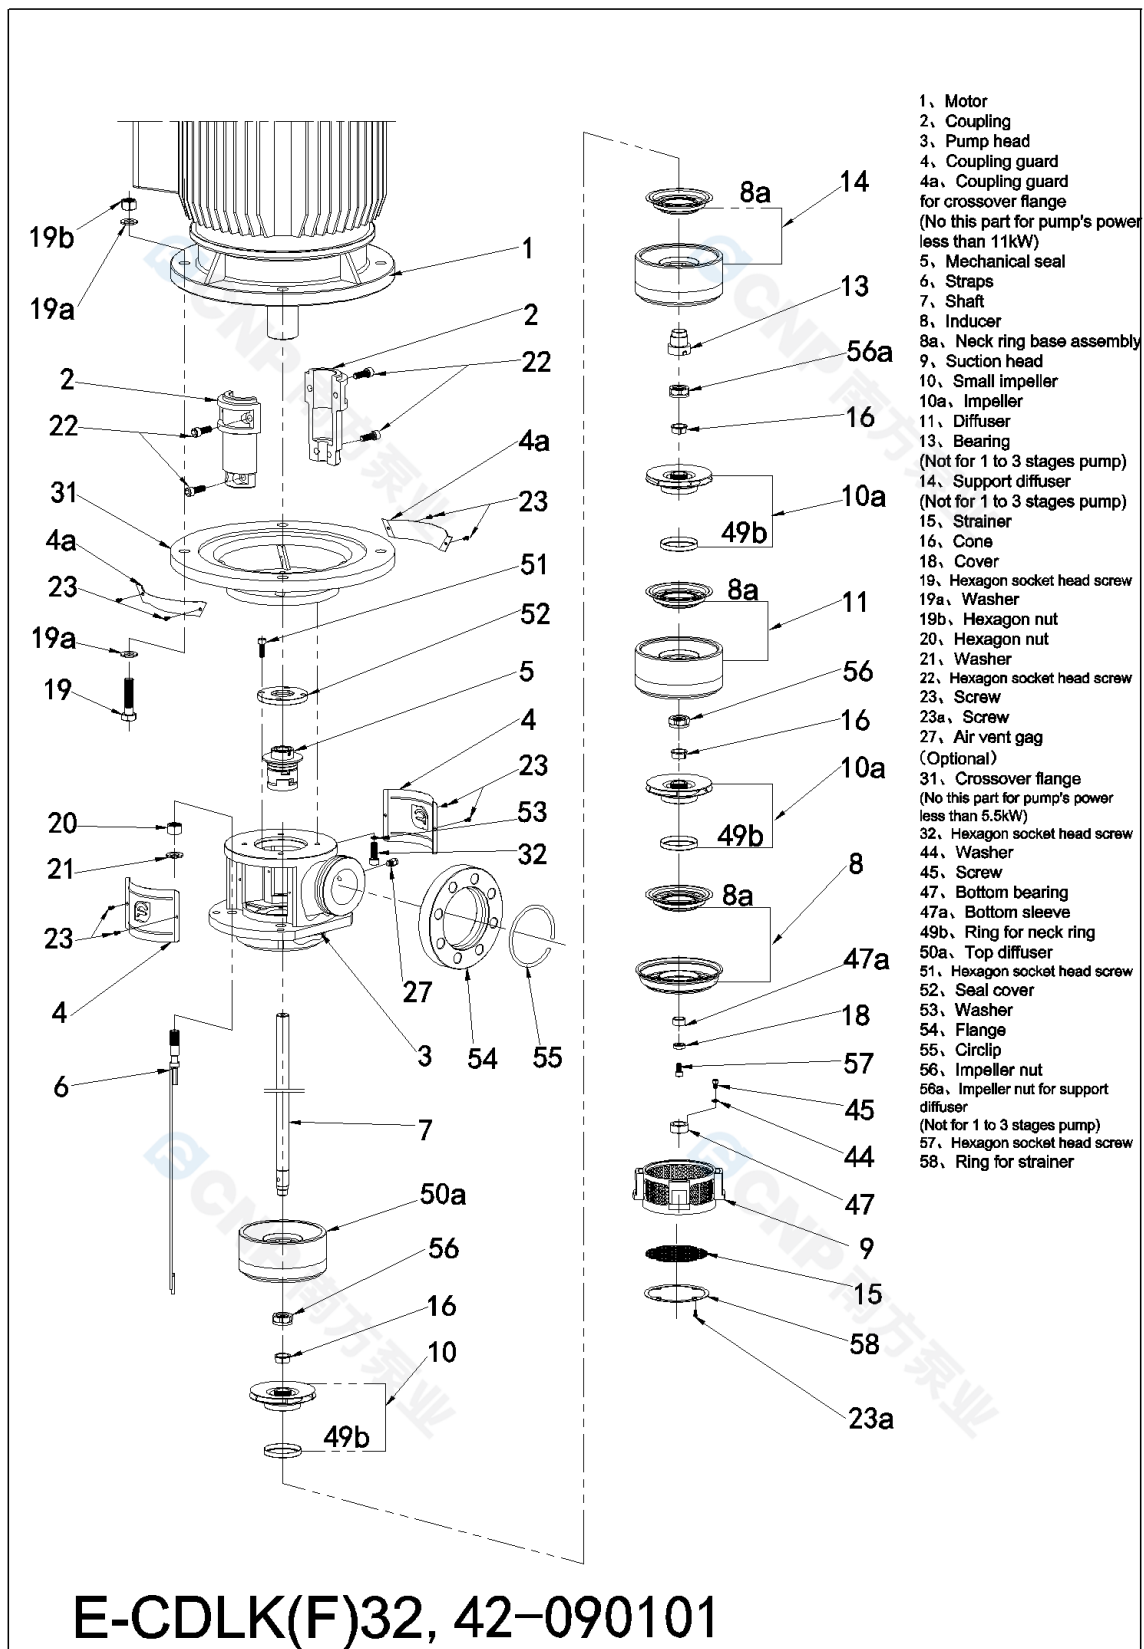

 CNP 南方泵业	Physical picture CDLK32-10/1-1	Manufacturer	Nanfang Pump Industry Co.,Ltd (CNP)
		Address	Hangzhou, Zhejiang, China
		Contact	86-571-88637351
		Date	2025/02/04
		Client Name	dieselpumpasia
Project Name		Client Addr.	
Item NO		Contacts	dpa
		Contact	



 CNP 南方泵业	Order Data CDLK32-10/1-1	Manufacturer	Nanfang Pump Industry Co.,Ltd (CNP)
		Address	Hangzhou, Zhejiang, China
		Contact	86-571-88637351
		Date	2025/02/04
		Client Name	dieselpumpasia
Project Name		Client Addr.	
Item NO		Contacts	dpa
		Contact	

Pump model CDLK32-10/1-1
Part NO. 1100057014
Product price
Quantity 1
Total price

Inquiry notes