

 CNP 南方泵业	Product Information SJ8-20	Manufacturer	Nanfang Pump Industry Co.,Ltd (CNP)
		Address	Hangzhou, Zhejiang, China
		Contact	86-571-88637351
		Date	2025/06/30
		Client Name	WEPKO
Project Name		Client Addr.	
Item NO		Contacts	Wepko
		Contact	

Part NO.	1100051013
Product Picture: (Note: Images may not be the same as the product)	Note
	Stainless steel multi-stage submersible pump is equipped with a submersible motor which can replace traditional long axis Deep-well pump.The pump is also equipped with a check valve to protect itself from reflux and water hammer.

Nameplate parameters

Flow	8 m ³ /h
Head	79 m
Efficiency	56 %
Speed	2850 rpm
Number of stages	20

Material

Impeller	304
Material Code	F

Installation

Operation Pressure	27bar
Maximum Immersion Depth	70m
Maximum Operation Pressure	38bar

Medium

Medium Temperature	15~40°C
Medium PH Value	6.5~8.5
Liquid Temperature Range	+25°C

Structure dimension

Rotation Direction	Anti-clockwise rotation viewing from outlet
Explosed view	SJ8exploded view


Motor

Number of Motor Phase	Three Phase
Protection Class	IP68
Insulation Class	F
Motor Power(kW)	4KW
Power Frequency(Hz)	50HZ
Rated Voltage (V)	380

Others

Weight (kg)	35
-------------	----

	Performance Curve SJ8-20	Manufacturer	Nanfang Pump Industry Co.,Ltd (CNP)
		Address	Hangzhou, Zhejiang, China
		Contact	86-571-88637351
		Date	2025/06/30
Project Name		Client Name	WEPKO
Item NO		Client Addr.	
		Contacts	Wepko
		Contact	

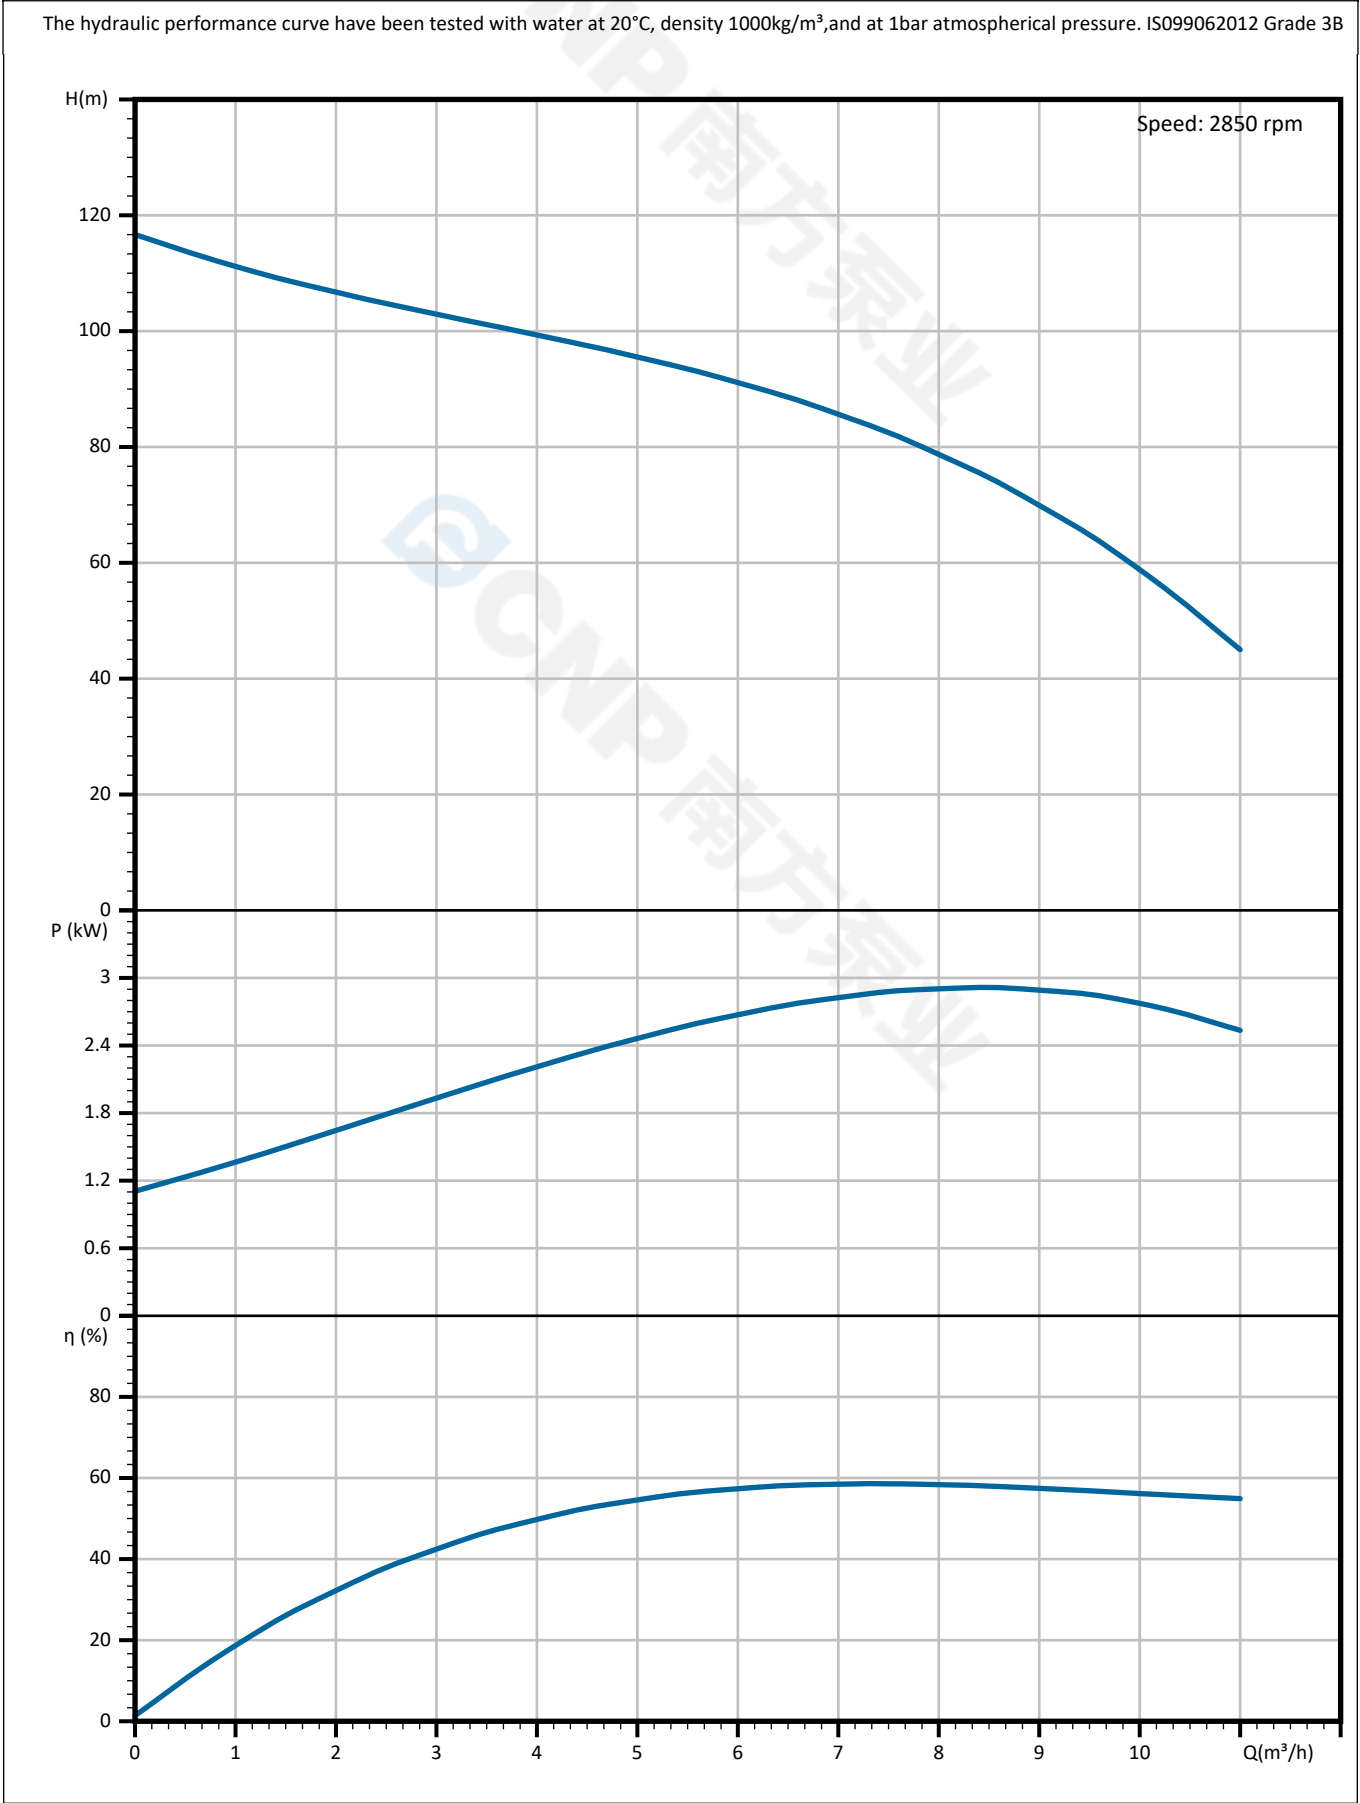


 CNP 南方泵业	Pump Technical Parameters SJ8-20	Manufacturer	Nanfang Pump Industry Co.,Ltd (CNP)
		Address	Hangzhou, Zhejiang, China
		Contact	86-571-88637351
		Date	2025/06/30
Project Name		Client Name	WEPKO
		Client Addr.	
Item NO		Contacts	Wepko
		Contact	

Rated parameters	
Pump model	SJ8-20
Part NO.	1100051013
Rated flow	8 m³/h
Rated head	79 m
Rated efficiency	56 (%)
Power (kW)	3.08 kW
Speed (rpm)	2850
Max impeller diameter (mm)	75
Medium	
Pumped medium	water
Working temperature (°C)	20
Medium density (kg/m³)	1000
Viscosity (mm²/s)	1


The image displays three performance graphs for the SJ8-20 pump, plotted against flow rate (Q) in m³/h on the x-axis, ranging from 0 to 10.

- Head (H) vs Flow (Q):** The top graph shows the head curve starting at approximately 115 m at 0 m³/h and decreasing to about 45 m at 10 m³/h. The rated head of 79 m is indicated at the rated flow of 8 m³/h.
- Power (P) vs Flow (Q):** The middle graph shows the power curve starting at approximately 1.2 kW at 0 m³/h, peaking at about 3.1 kW around 8 m³/h, and then slightly decreasing to about 2.4 kW at 10 m³/h. The rated power of 3.08 kW is indicated at the rated flow of 8 m³/h.
- Efficiency (η) vs Flow (Q):** The bottom graph shows the efficiency curve starting at 0% at 0 m³/h, peaking at about 60% around 8 m³/h, and then slightly decreasing to about 56% at 10 m³/h. The rated efficiency of 56% is indicated at the rated flow of 8 m³/h.

	Dimension Drawing SJ8-20	Manufacturer	Nanfang Pump Industry Co.,Ltd (CNP)
		Address	Hangzhou, Zhejiang, China
		Contact	86-571-88637351
		Date	2025/06/30
Project Name		Client Name	WEPKO
		Client Addr.	
Item NO		Contacts	Wepko
		Contact	

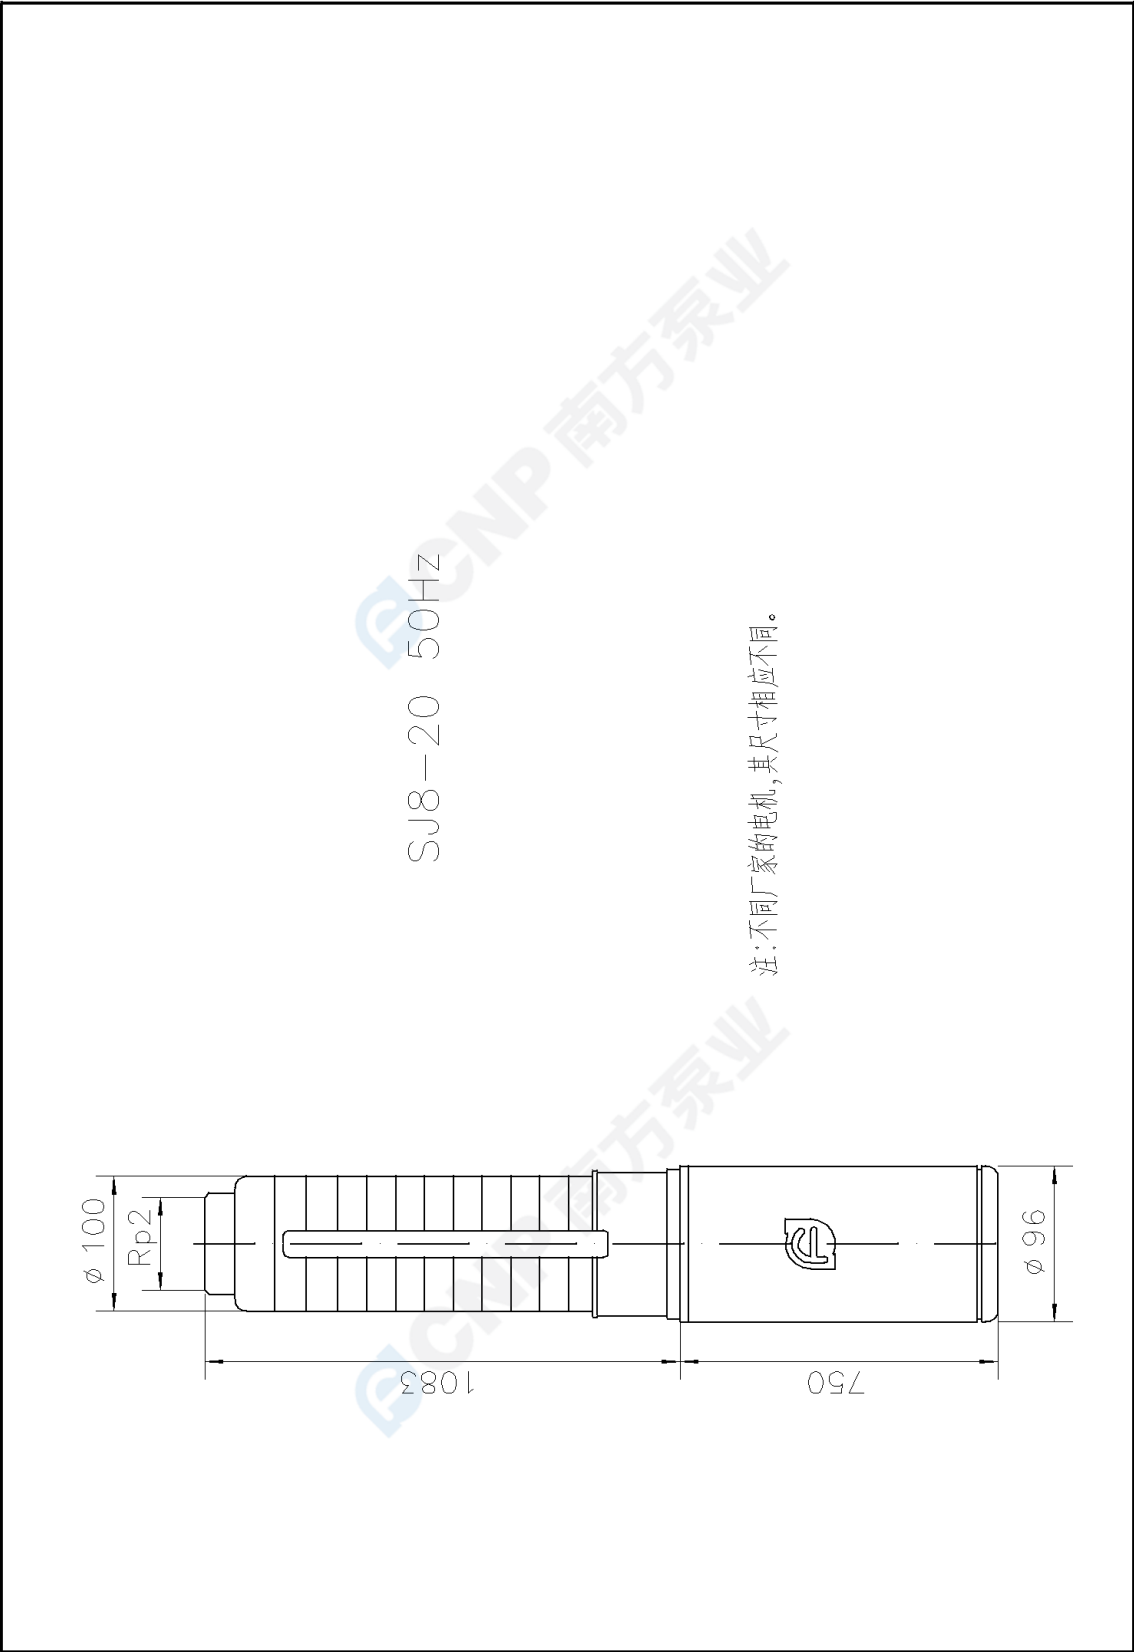

 CNP 南方泵业	Explosed view SJ8-20	Manufacturer	Nanfang Pump Industry Co.,Ltd (CNP)
		Address	Hangzhou, Zhejiang, China
		Contact	86-571-88637351
		Date	2025/06/30
Project Name		Client Name	WEPKO
Item NO		Client Addr.	
		Contacts	Wepko
		Contact	

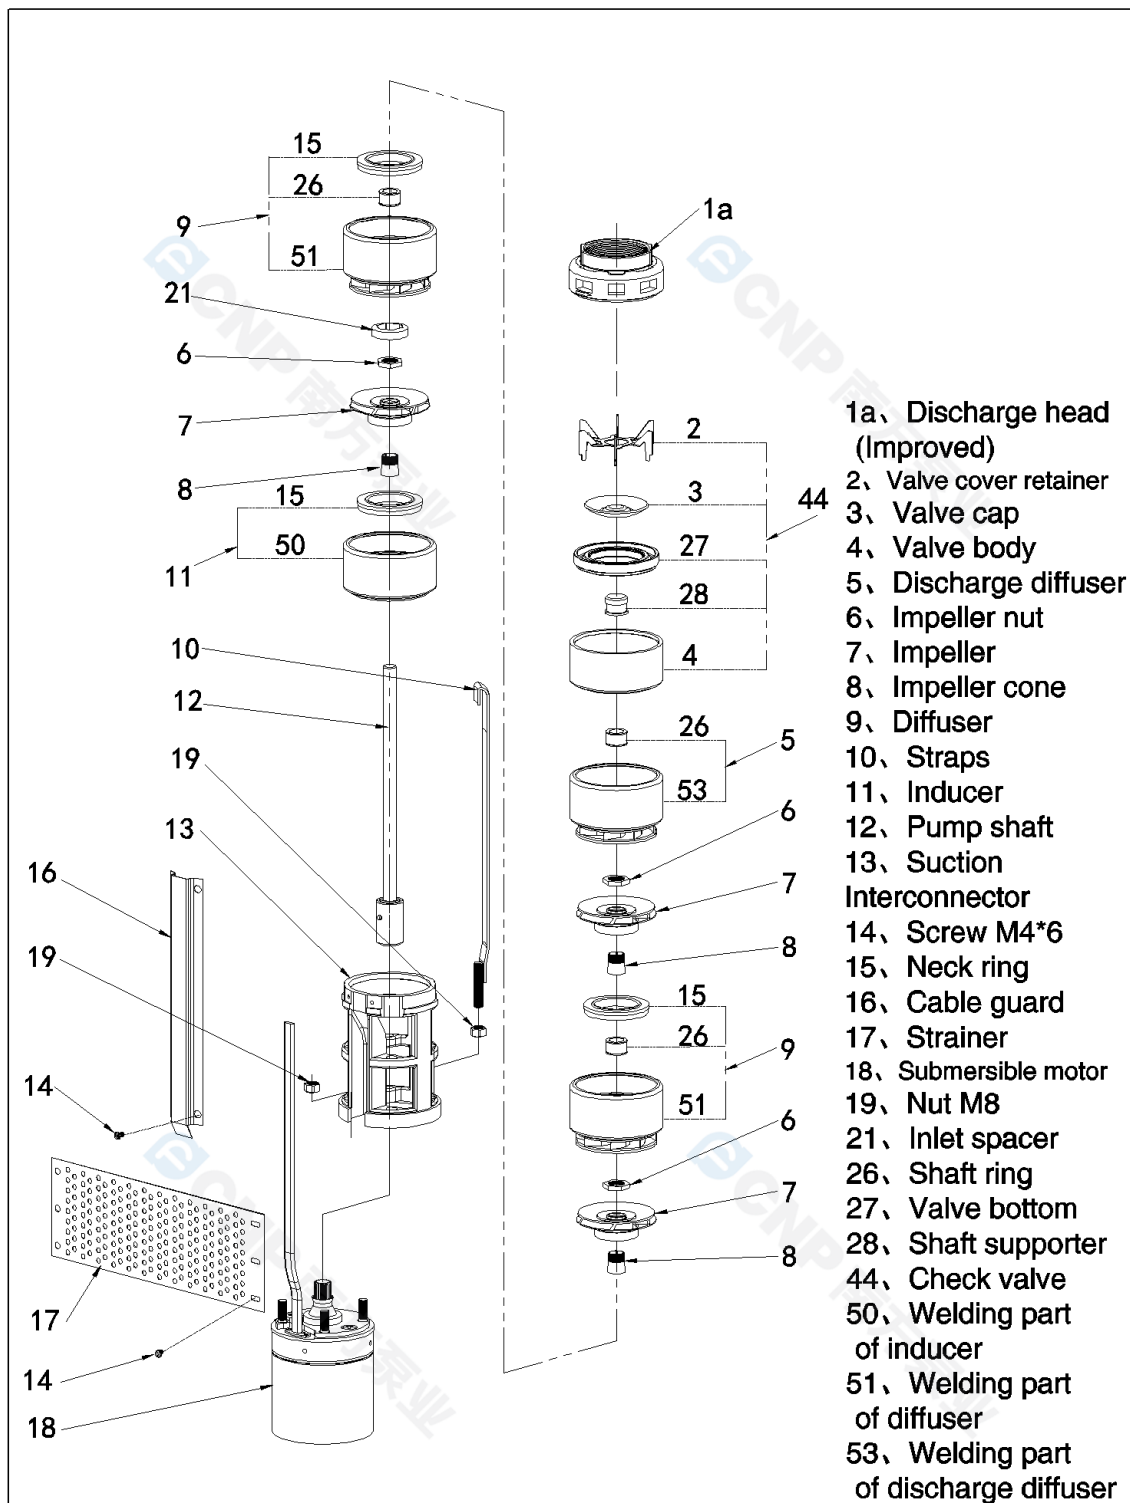

E-SJ 8-151103

 CNP 南方泵业	Physical picture SJ8-20	Manufacturer	Nanfang Pump Industry Co.,Ltd (CNP)
		Address	Hangzhou, Zhejiang, China
		Contact	86-571-88637351
		Date	2025/06/30
		Client Name	WEPKO
Project Name		Client Addr.	
Item NO		Contacts	Wepko
		Contact	



 CNP 南方泵业	Order Data SJ8-20	Manufacturer	Nanfang Pump Industry Co.,Ltd (CNP)
		Address	Hangzhou, Zhejiang, China
		Contact	86-571-88637351
		Date	2025/06/30
Project Name		Client Name	WEPKO
		Client Addr.	
Item NO		Contacts	Wepko
		Contact	

Pump model SJ8-20
Part NO. 1100051013
Product price
Quantity 1
Total price

Inquiry notes