

 CNP 南方泵业	Product Information SJ30-24	Manufacturer	Nanfang Pump Industry Co.,Ltd (CNP)
		Address	Hangzhou, Zhejiang, China
		Contact	86-571-88637351
		Date	2025/06/30
		Client Name	WEPKO
Project Name		Client Addr.	
Item NO		Contacts	Wepko
		Contact	

Part NO.	1100051932		
Product Picture: (Note: Images may not be the same as the product)		Note	
		Stainless steel multi-stage submersible pump is equipped with a submersible motor which can replace traditional long axis Deep-well pump.The pump is also equipped with a check valve to protect itself from reflux and water hammer.	

Nameplate parameters

Flow	30 m ³ /h
Head	177 m
Efficiency	68 %
Speed	2850 rpm
Number of stages	24

Material

Impeller	304
Material Code	F

Installation

Operation Pressure	28bar
Maximum Immersion Depth	70m
Maximum Operation Pressure	38bar

Medium

Medium Temperature	15~40°C
Medium PH Value	6.5~8.5
Liquid Temperature Range	+25°C

Structure dimension

Rotation Direction	Anti-clockwise rotation viewing from outlet
Exploled view	SJ30exploded view


Motor

Number of Motor Phase	Three Phase
Protection Class	IP68
Insulation Class	F
Motor Power(kW)	22KW
Power Frequency(Hz)	50HZ
Rated Voltage (V)	380

Others

Weight (kg)	142
-------------	-----

	Performance Curve SJ30-24	Manufacturer	Nanfang Pump Industry Co.,Ltd (CNP)
		Address	Hangzhou, Zhejiang, China
		Contact	86-571-88637351
		Date	2025/06/30
Project Name		Client Name	WEPKO
Item NO		Client Addr.	
		Contacts	Wepko
		Contact	

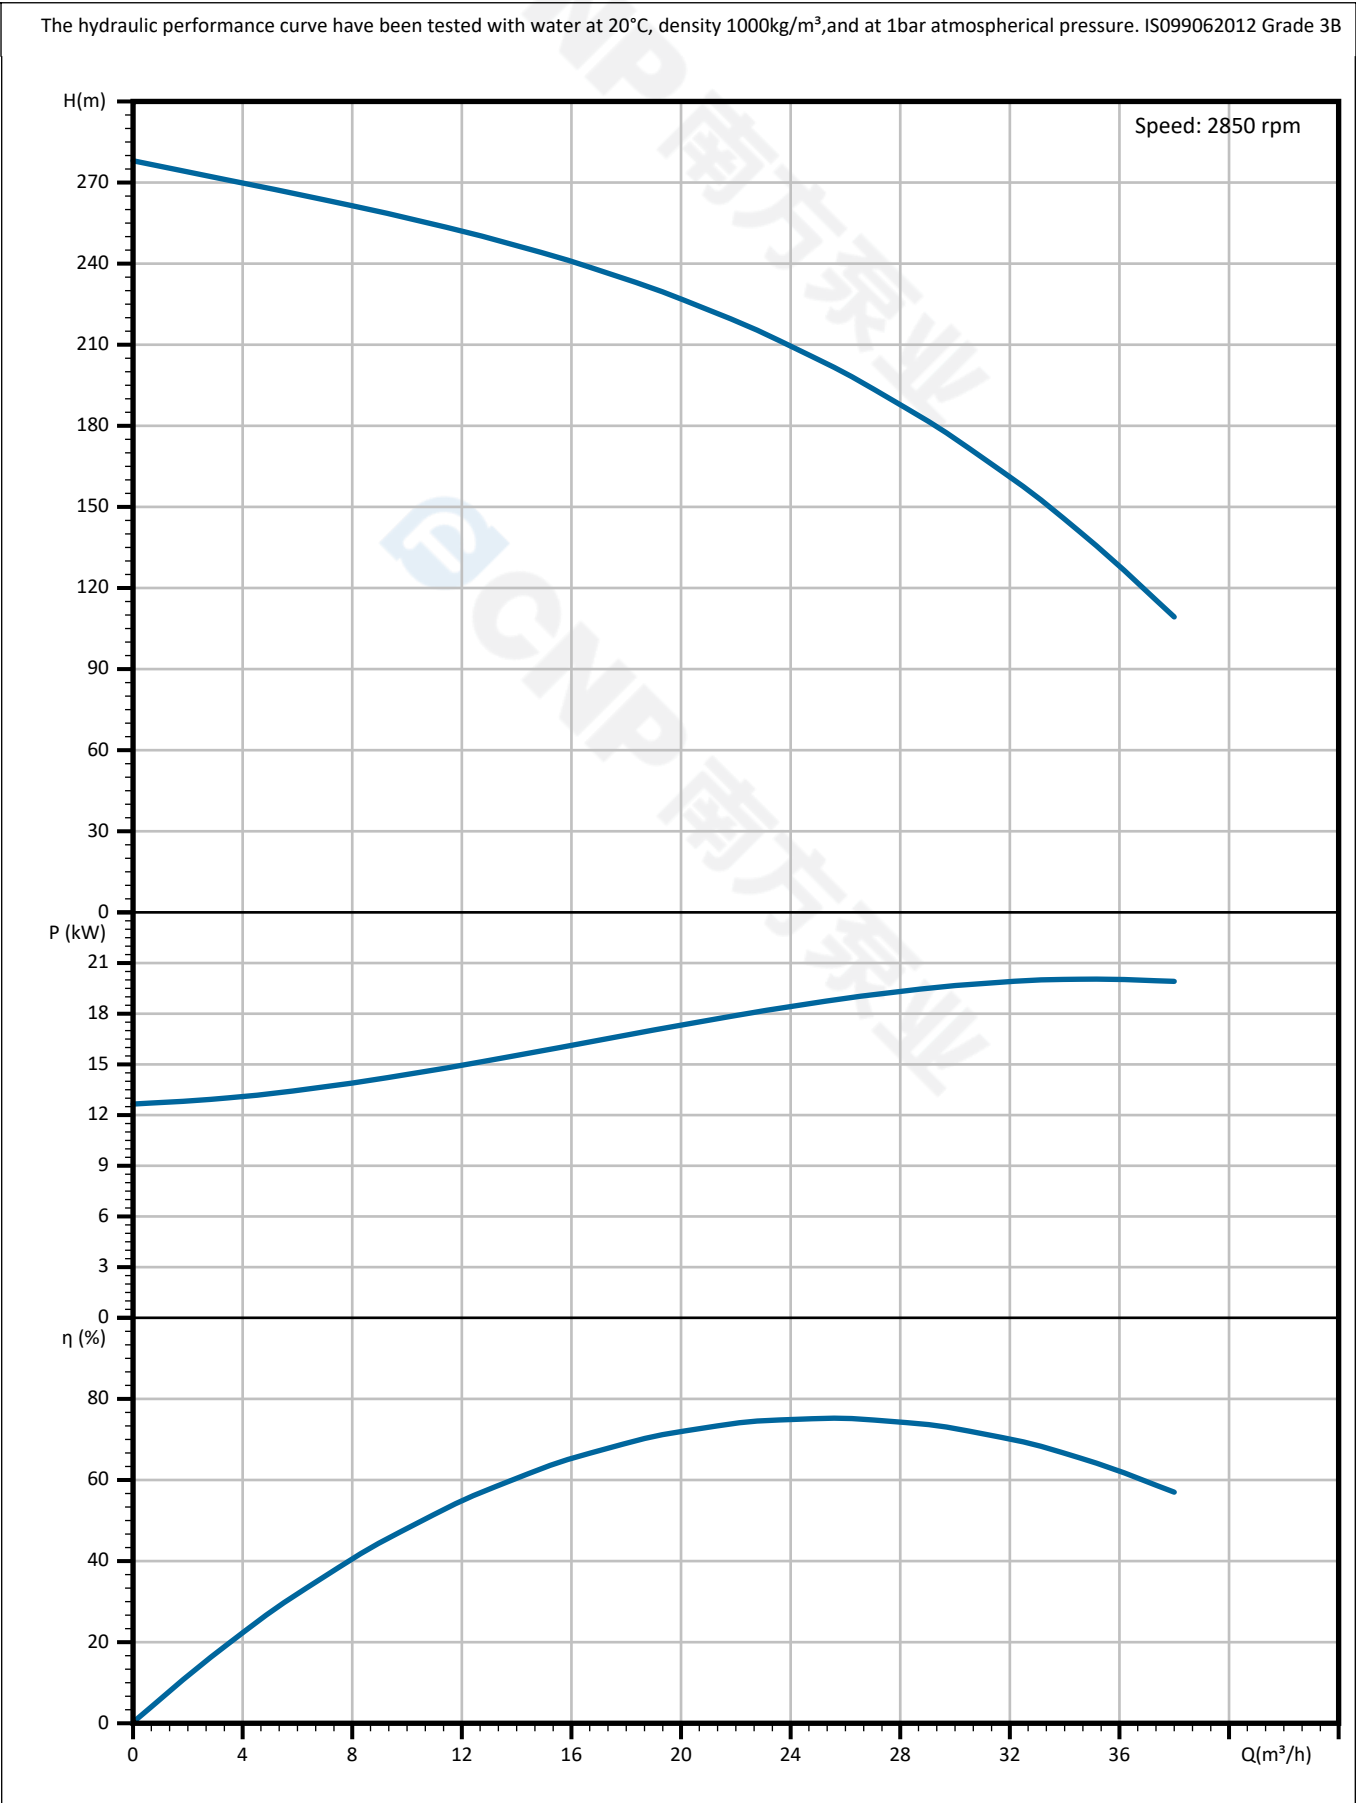

 CNP 南方泵业	Pump Technical Parameters SJ30-24	Manufacturer	Nanfang Pump Industry Co.,Ltd (CNP)
		Address	Hangzhou, Zhejiang, China
		Contact	86-571-88637351
		Date	2025/06/30
Project Name		Client Name	WEPKO
		Client Addr.	
Item NO		Contacts	Wepko
		Contact	


Rated parameters	
Pump model	SJ30-24
Part NO.	1100051932
Rated flow	30 m³/h
Rated head	177 m
Rated efficiency	68 (%)
Power (kW)	21.3 kW
Speed (rpm)	2850
Max impeller diameter (mm)	93.5
Medium	
Pumped medium	water
Working temperature (°C)	20
Medium density (kg/m³)	1000
Viscosity (mm²/s)	1

The image displays three performance curves for the SJ30-24 pump, plotted against flow rate (Q) in m³/h on the x-axis, ranging from 0 to 36.


- Head (H) in meters:** The top graph shows the head decreasing from approximately 285 m at 0 m³/h to about 115 m at 36 m³/h.
- Power (P) in kW:** The middle graph shows the power increasing from approximately 12.5 kW at 0 m³/h to about 19.5 kW at 36 m³/h.
- Efficiency (η) in %:** The bottom graph shows the efficiency increasing from 0% at 0 m³/h to a peak of approximately 75% at 24 m³/h, then decreasing to about 58% at 36 m³/h.

Flow (Q) [m³/h]	Head (H) [m]	Power (P) [kW]	Efficiency (η) [%]
0	285	12.5	0
8	265	13.5	40
16	245	15.5	65
24	215	18.0	75
32	175	19.0	70
36	115	19.5	58

 CNP 南方泵业	Dimension Drawing SJ30-24	Manufacturer	Nanfang Pump Industry Co.,Ltd (CNP)
		Address	Hangzhou, Zhejiang, China
		Contact	86-571-88637351
		Date	2025/06/30
		Client Name	WEPKO
Project Name		Client Addr.	
Item NO		Contacts	Wepko
		Contact	

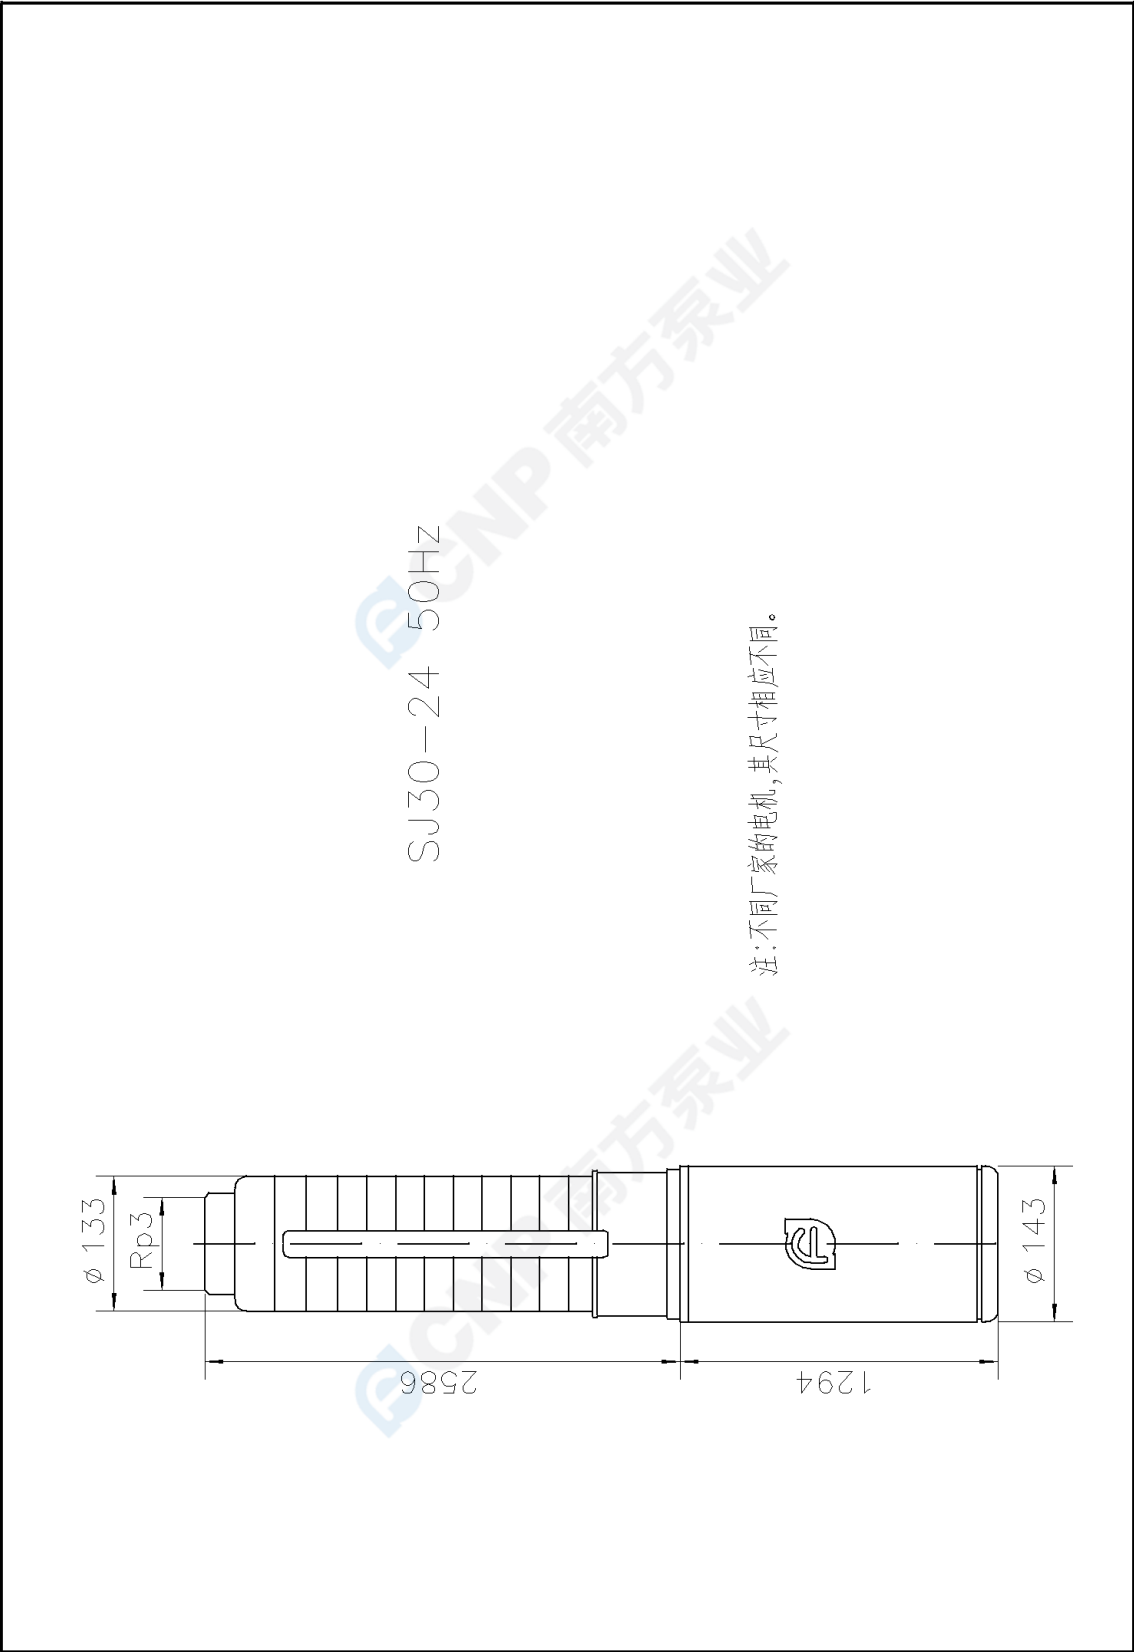

 CNP 南方泵业	Explosed view SJ30-24	Manufacturer	Nanfeng Pump Industry Co.,Ltd (CNP)
		Address	Hangzhou, Zhejiang, China
		Contact	86-571-88637351
		Date	2025/06/30
Project Name		Client Name	WEPKO
Item NO		Client Addr.	
		Contacts	Wepko
		Contact	

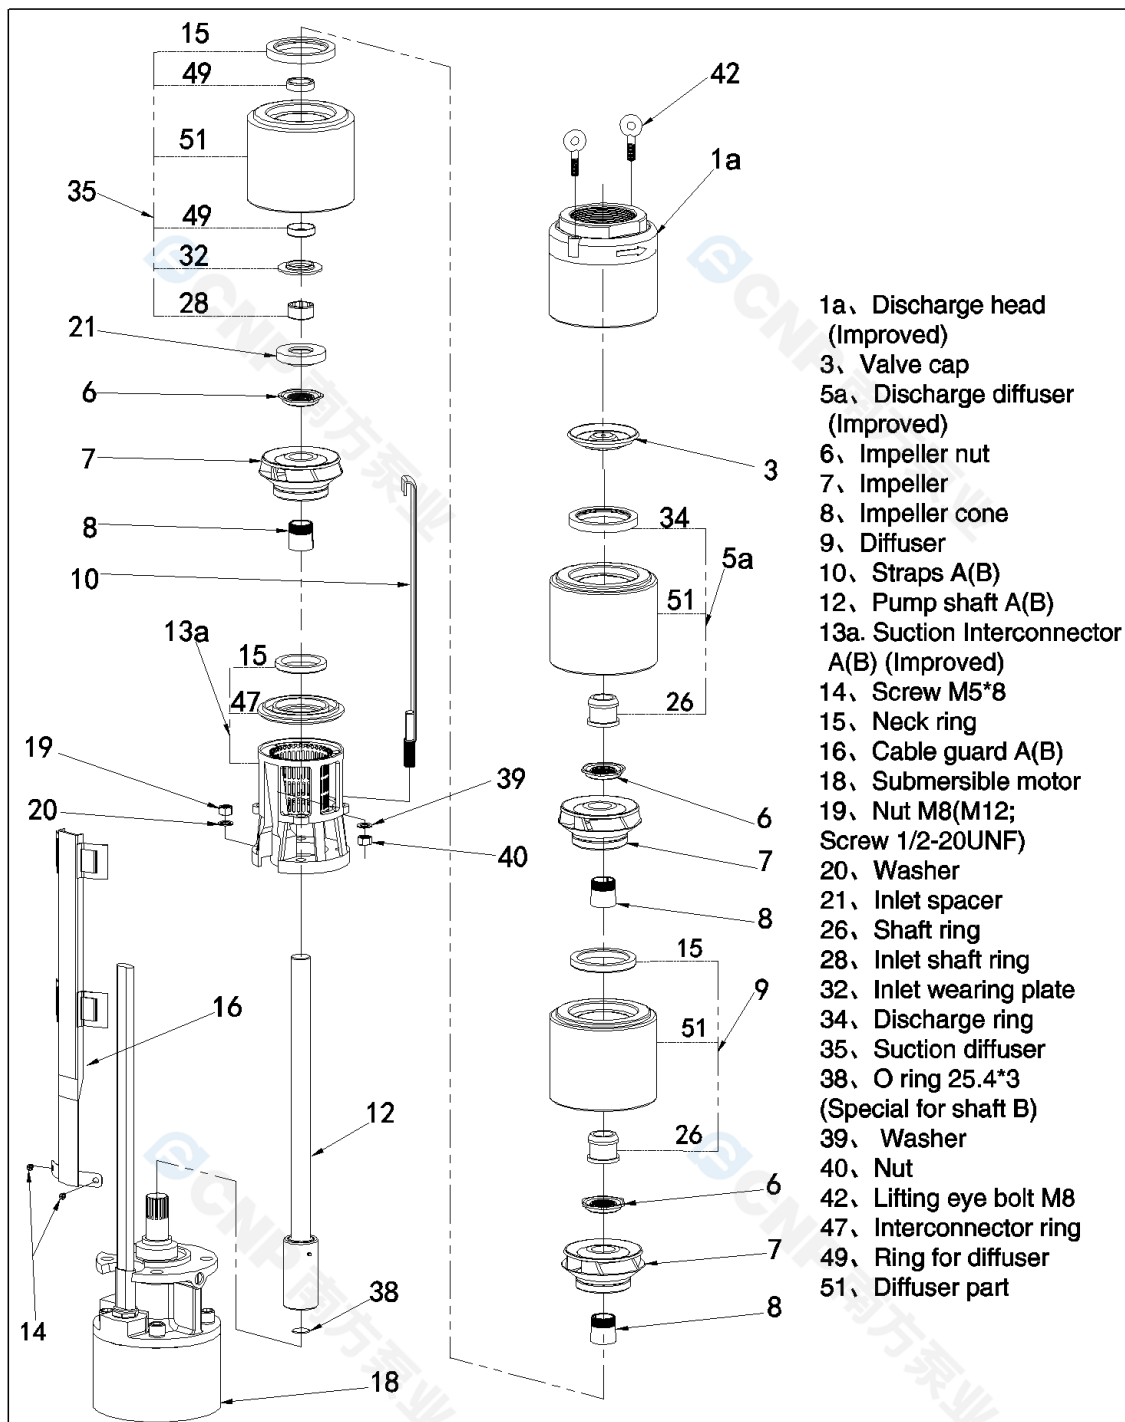

E-SJ 30-151103

 CNP 南方泵业	Physical picture SJ30-24	Manufacturer	Nanfang Pump Industry Co.,Ltd (CNP)
		Address	Hangzhou, Zhejiang, China
		Contact	86-571-88637351
		Date	2025/06/30
		Client Name	WEPKO
Project Name		Client Addr.	
Item NO		Contacts	Wepko
		Contact	



 CNP 南方泵业	Order Data SJ30-24	Manufacturer	Nanfang Pump Industry Co.,Ltd (CNP)
		Address	Hangzhou, Zhejiang, China
		Contact	86-571-88637351
		Date	2025/06/30
Project Name		Client Name	WEPKO
		Client Addr.	
Item NO		Contacts	Wepko
		Contact	

Pump model SJ30-24
Part NO. 1100051932
Product price
Quantity 1
Total price

Inquiry notes