

 CNP 南方泵业	Product Information SJ95-12	Manufacturer	Nanfang Pump Industry Co.,Ltd (CNP)
		Address	Hangzhou, Zhejiang, China
		Contact	86-571-88637351
		Date	2025/06/30
		Client Name	WEPKO
Project Name		Client Addr.	
Item NO		Contacts	Wepko
		Contact	

Part NO.	1100052580
Product Picture: (Note: Images may not be the same as the product)	Note
	Stainless steel multi-stage submersible pump is equipped with a submersible motor which can replace traditional long axis Deep-well pump.The pump is also equipped with a check valve to protect itself from reflux and water hammer.

Nameplate parameters

Flow	95 m ³ /h
Head	129 m
Efficiency	72 %
Speed	2900 rpm
Number of stages	12

Material

Impeller	304
Material Code	F

Installation

Operation Pressure	34bar
Maximum Immersion Depth	70m
Maximum Operation Pressure	38bar

Medium

Medium Temperature	15~40°C
Medium PH Value	6.5~8.5
Liquid Temperature Range	+25°C

Structure dimension

Rotation Direction	Anti-clockwise rotation viewing from outlet
Explosed view	SJ75,95exploded view


Motor

Number of Motor Phase	Three Phase
Protection Class	IP68
Insulation Class	F
Motor Power(kW)	55KW
Power Frequency(Hz)	50HZ
Rated Voltage (V)	380

Others

Weight (kg)	279
-------------	-----

	Performance Curve SJ95-12	Manufacturer	Nanfang Pump Industry Co.,Ltd (CNP)
		Address	Hangzhou, Zhejiang, China
		Contact	86-571-88637351
		Date	2025/06/30
Project Name		Client Name	WEPKO
Item NO		Client Addr.	
		Contacts	Wepko
		Contact	

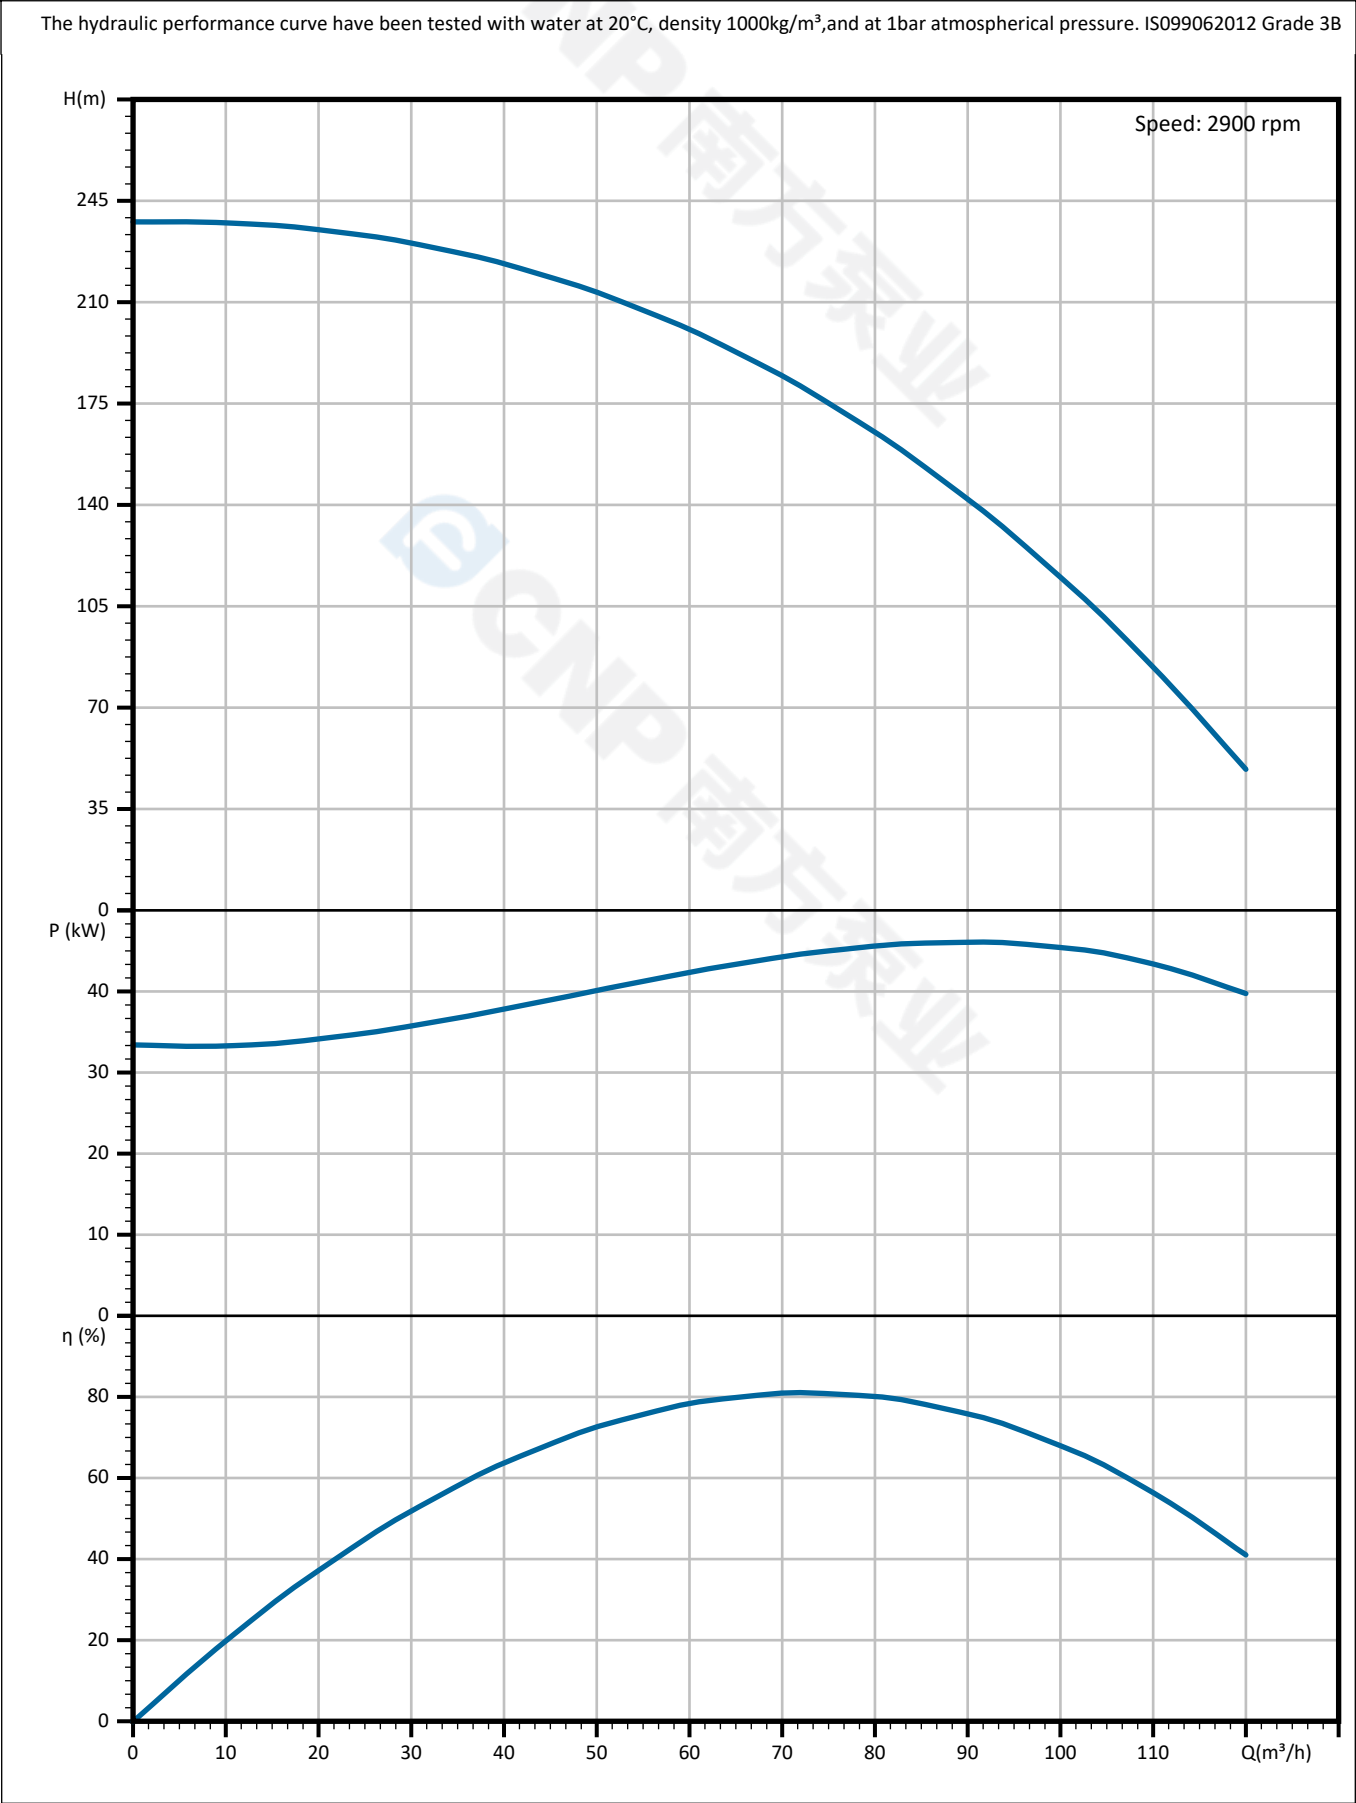


 CNP 南方泵业	Pump Technical Parameters SJ95-12	Manufacturer	Nanfang Pump Industry Co.,Ltd (CNP)
		Address	Hangzhou, Zhejiang, China
		Contact	86-571-88637351
		Date	2025/06/30
Project Name		Client Name	WEPKO
		Client Addr.	
Item NO		Contacts	Wepko
		Contact	

Rated parameters	
Pump model	SJ95-12
Part NO.	1100052580
Rated flow	95 m³/h
Rated head	129 m
Rated efficiency	72 (%)
Power (kW)	46.4 kW
Speed (rpm)	2900
Max impeller diameter (mm)	131
Medium	
Pumped medium	water
Working temperature (°C)	20
Medium density (kg/m³)	1000
Viscosity (mm²/s)	1


The graphs show the performance characteristics of the SJ95-12 pump. The top graph shows Head (H) in meters decreasing from approximately 240m at 0 m³/h to about 60m at 110 m³/h. The middle graph shows Power (P) in kW increasing from about 33kW to a peak of 45kW at 80 m³/h, then decreasing to 40kW at 110 m³/h. The bottom graph shows Efficiency (η) in percent increasing from 0% at 0 m³/h to a peak of about 82% at 75 m³/h, then decreasing to 42% at 110 m³/h.

Flow Q (m³/h)	Head H (m)	Power P (kW)	Efficiency η (%)
0	240	33	0
20	238	34	35
40	230	38	65
60	210	43	80
75	185	45	82
90	155	45	75
100	125	44	65
110	60	40	42

 CNP 南方泵业	Dimension Drawing SJ95-12	Manufacturer	Nanfang Pump Industry Co.,Ltd (CNP)
		Address	Hangzhou, Zhejiang, China
		Contact	86-571-88637351
		Date	2025/06/30
Project Name		Client Name	WEPKO
		Client Addr.	
Item NO		Contacts	Wepko
		Contact	

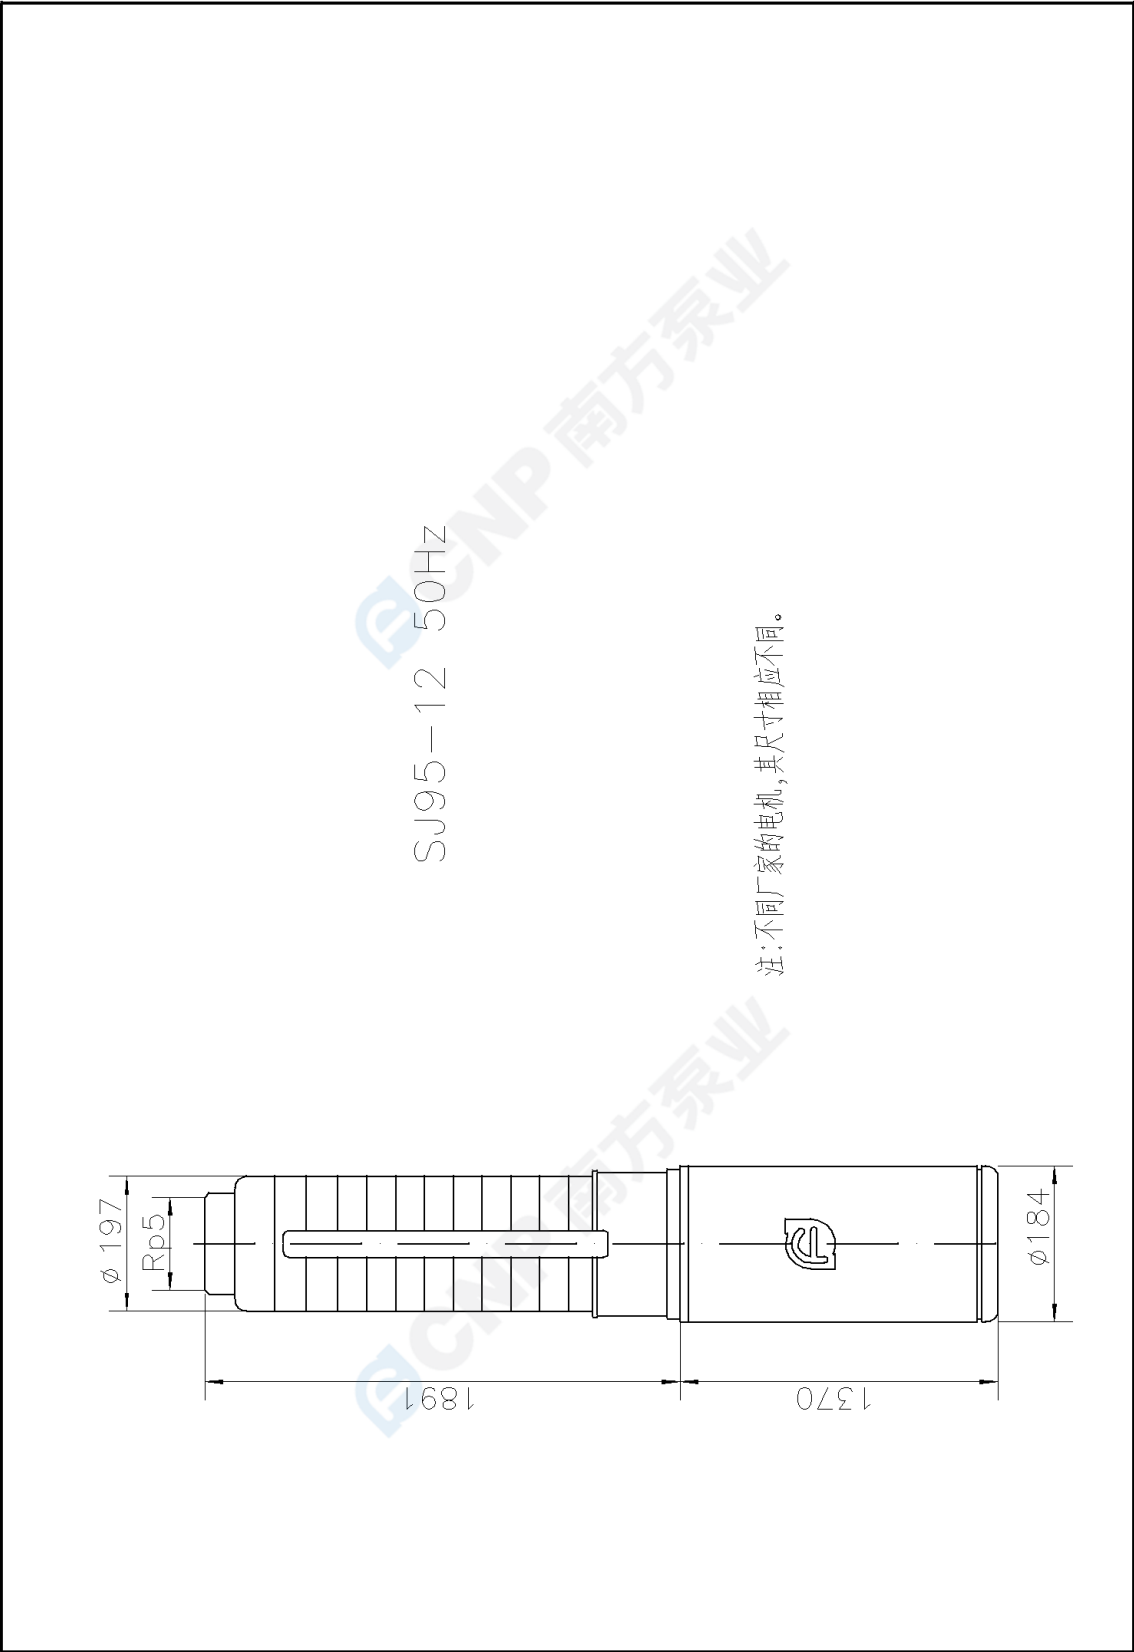

 CNP 南方泵业	Explosed view SJ95-12	Manufacturer	Nanfeng Pump Industry Co.,Ltd (CNP)
		Address	Hangzhou, Zhejiang, China
		Contact	86-571-88637351
		Date	2025/06/30
Project Name		Client Name	WEPKO
Item NO		Client Addr.	
		Contacts	Wepko
		Contact	

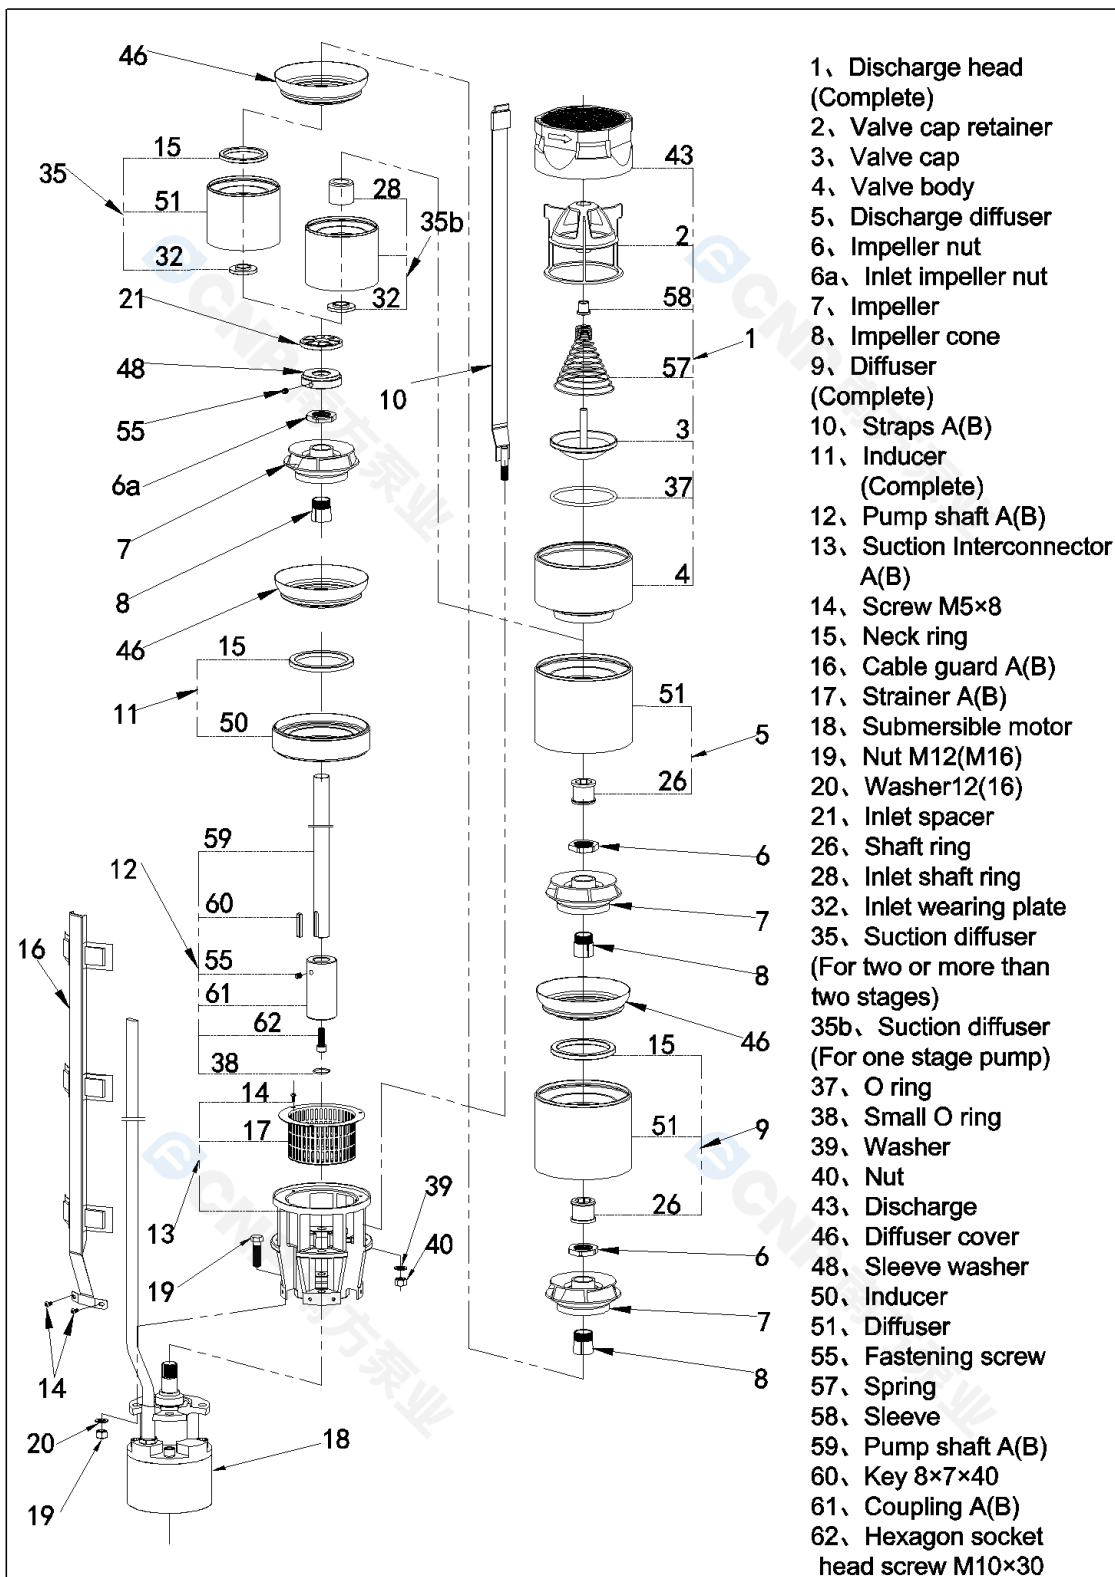

E-SJ 75, 95-090903

 CNP 南方泵业	Physical picture SJ95-12	Manufacturer	Nanfang Pump Industry Co.,Ltd (CNP)
		Address	Hangzhou, Zhejiang, China
		Contact	86-571-88637351
		Date	2025/06/30
		Client Name	WEPKO
Project Name		Client Addr.	
Item NO		Contacts	Wepko
		Contact	



 CNP 南方泵业	Order Data SJ95-12	Manufacturer	Nanfang Pump Industry Co.,Ltd (CNP)
		Address	Hangzhou, Zhejiang, China
		Contact	86-571-88637351
		Date	2025/06/30
Project Name		Client Name	WEPKO
		Client Addr.	
Item NO		Contacts	Wepko
		Contact	

Pump model SJ95-12
Part NO. 1100052580
Product price
Quantity 1
Total price

Inquiry notes