


 CNP 南方泵业	Product Information ZS65-50-200/6 15.0	Manufacturer	Nanfang Pump Industry Co.,Ltd (CNP)
		Address	Hangzhou, Zhejiang, China
		Contact	86-571-88637351
		Date	2025/07/01
		Client Name	WEPKO
Project Name		Client Addr.	
Item NO		Contacts	
		Contact	


Part NO.	1100042855
Product Picture: (Note: Images may not be the same as the product)	Note
	Stainless steel horizontal single-stage centrifugal pump, the pump body is made of stainless steel plate stamping and expansion welding process, which can replace the traditional IS pump and general corrosion-resistant pump, with axial inlet and radial outlet.
Nameplate parameters	
Flow	50 m ³ /h
Head	58 m
Efficiency	69 %
Speed	3500 rpm
Technology	
Pump rotator speed	3500
Nameplate standards	CE
Material	
Impeller	304
Rubber code	p
Material Code	S
Installation	
Maximum Operation Pressure	10bar
Maximum Altitude	1000m
Medium	
Maximum Environment Temperature	40°C
Liquid Temperature Range	-20°C+100°C
Structure dimension	
Expolded view	ZS exploded view
Motor	
Number of Motor Phase	Three Phase
Protection Class	IP55
Insulation Class	F
Motor Power(kW)	15KW
Power Frequency(Hz)	60HZ
Rated Voltage (V)	380V
Rated Current (A)	28.4A
Energy Efficiency Level	IE2
Seal	
Mechanical Seal	ZS-24/BSE4
Others	
Weight (kg)	171

	Performance Curve ZS65-50-200/6 15.0	Manufacturer	Nanfang Pump Industry Co.,Ltd (CNP)
		Address	Hangzhou, Zhejiang, China
		Contact	86-571-88637351
		Date	2025/07/01
Project Name		Client Name	WEPKO
Item NO		Client Addr.	
		Contacts	
		Contact	

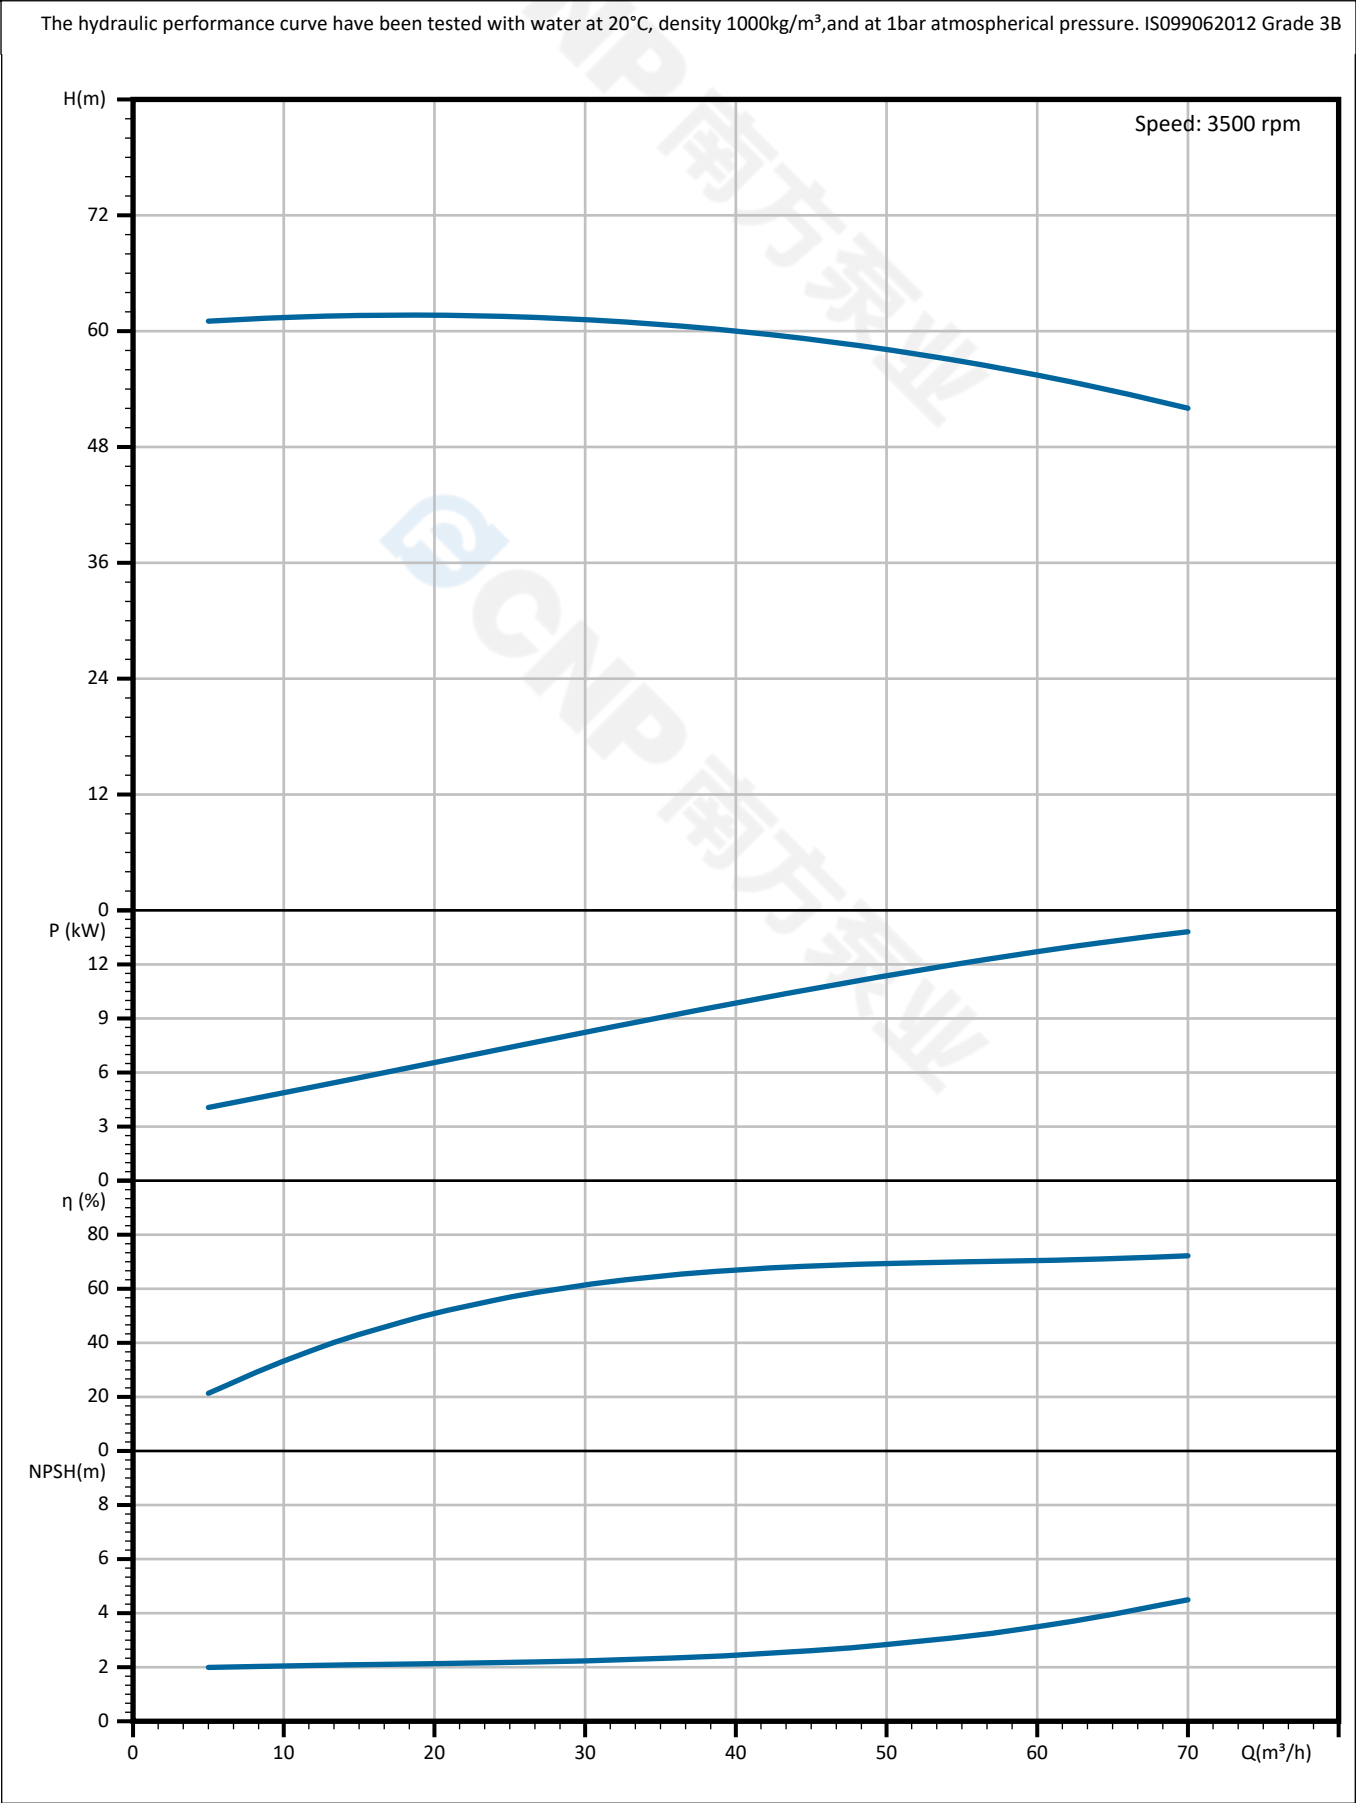


 CNP 南方泵业	Pump Technical Parameters ZS65-50-200/6 15.0	Manufacturer	Nanfang Pump Industry Co.,Ltd (CNP)
		Address	Hangzhou, Zhejiang, China
		Contact	86-571-88637351
		Date	2025/07/01
Project Name		Client Name	WEPKO
		Client Addr.	
Item NO		Contacts	
		Contact	

Rated parameters	
Pump model	ZS65-50-200/6 15.0
Part NO.	1100042855
Rated flow	50 m³/h
Rated head	58 m
Rated efficiency	69 (%)
Power (kW)	11.4 kW
NPSHr (m)	3.5
Speed (rpm)	3500
Max impeller diameter (mm)	181
Medium	
Pumped medium	water
Working temperature (°C)	20
Medium density (kg/m³)	1000
Viscosity (mm²/s)	1

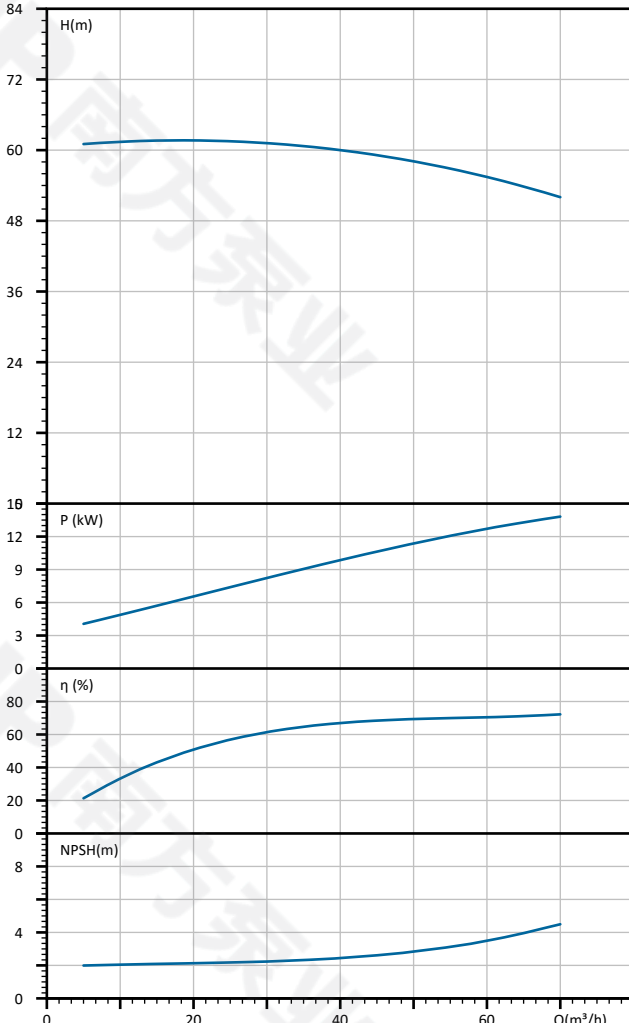


Q (m³/h)	H (m)	P (kW)	η (%)	NPSH (m)
0	62	4.5	25	2.5
10	63	5.5	45	2.6
20	63	7.0	55	2.7
30	62	9.0	65	2.8
40	60	11.0	68	3.0
50	58	13.0	70	3.5
60	54	15.0	72	4.0
70	48	17.0	73	4.8

 CNP 南方泵业	Dimension Drawing ZS65-50-200/6 15.0	Manufacturer	Nanfang Pump Industry Co.,Ltd (CNP)
		Address	Hangzhou, Zhejiang, China
		Contact	86-571-88637351
		Date	2025/07/01
Project Name		Client Name	WEPKO
Item NO		Client Addr.	
		Contacts	
		Contact	

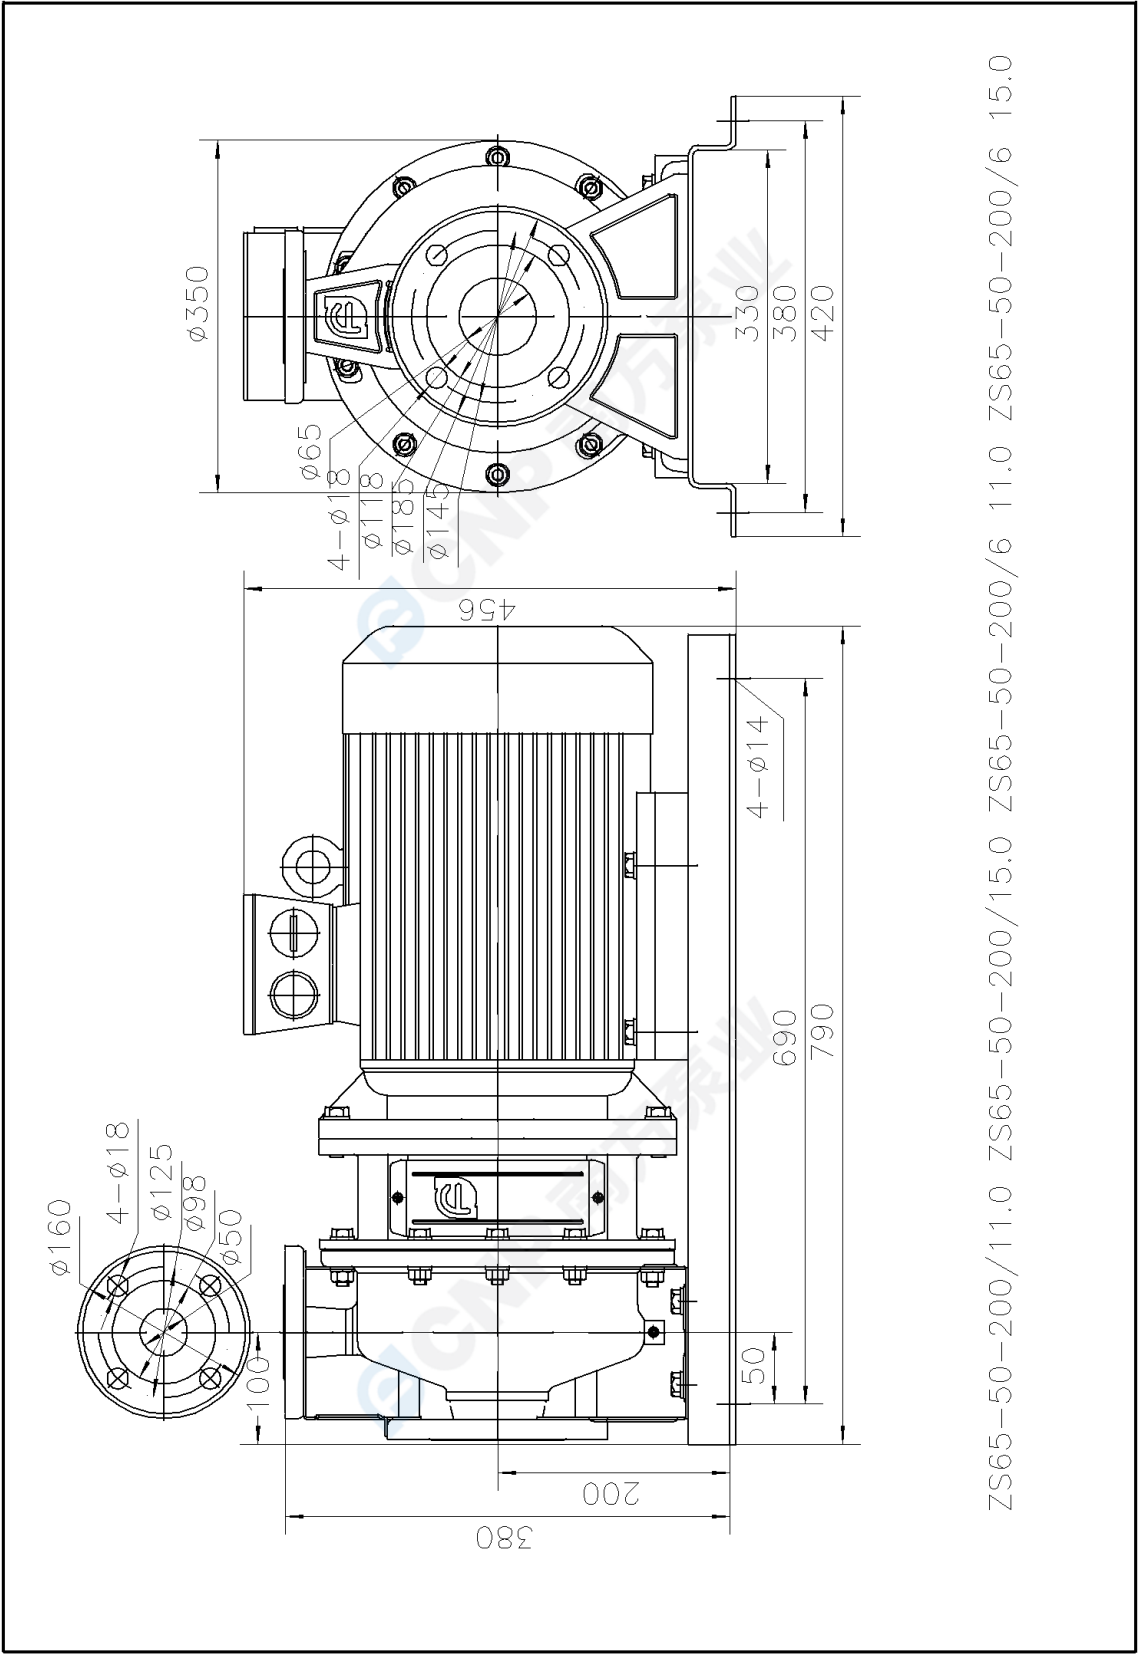

ZS65-50-200/11.0 ZS65-50-200/15.0 ZS65-50-200/6 11.0 ZS65-50-200/6 15.0

	Explosed view ZS65-50-200/6 15.0	Manufacturer	Nanfang Pump Industry Co.,Ltd (CNP)
		Address	Hangzhou, Zhejiang, China
		Contact	86-571-88637351
		Date	2025/07/01
Project Name		Client Name	WEPKO
Item NO		Client Addr.	
		Contacts	
		Contact	

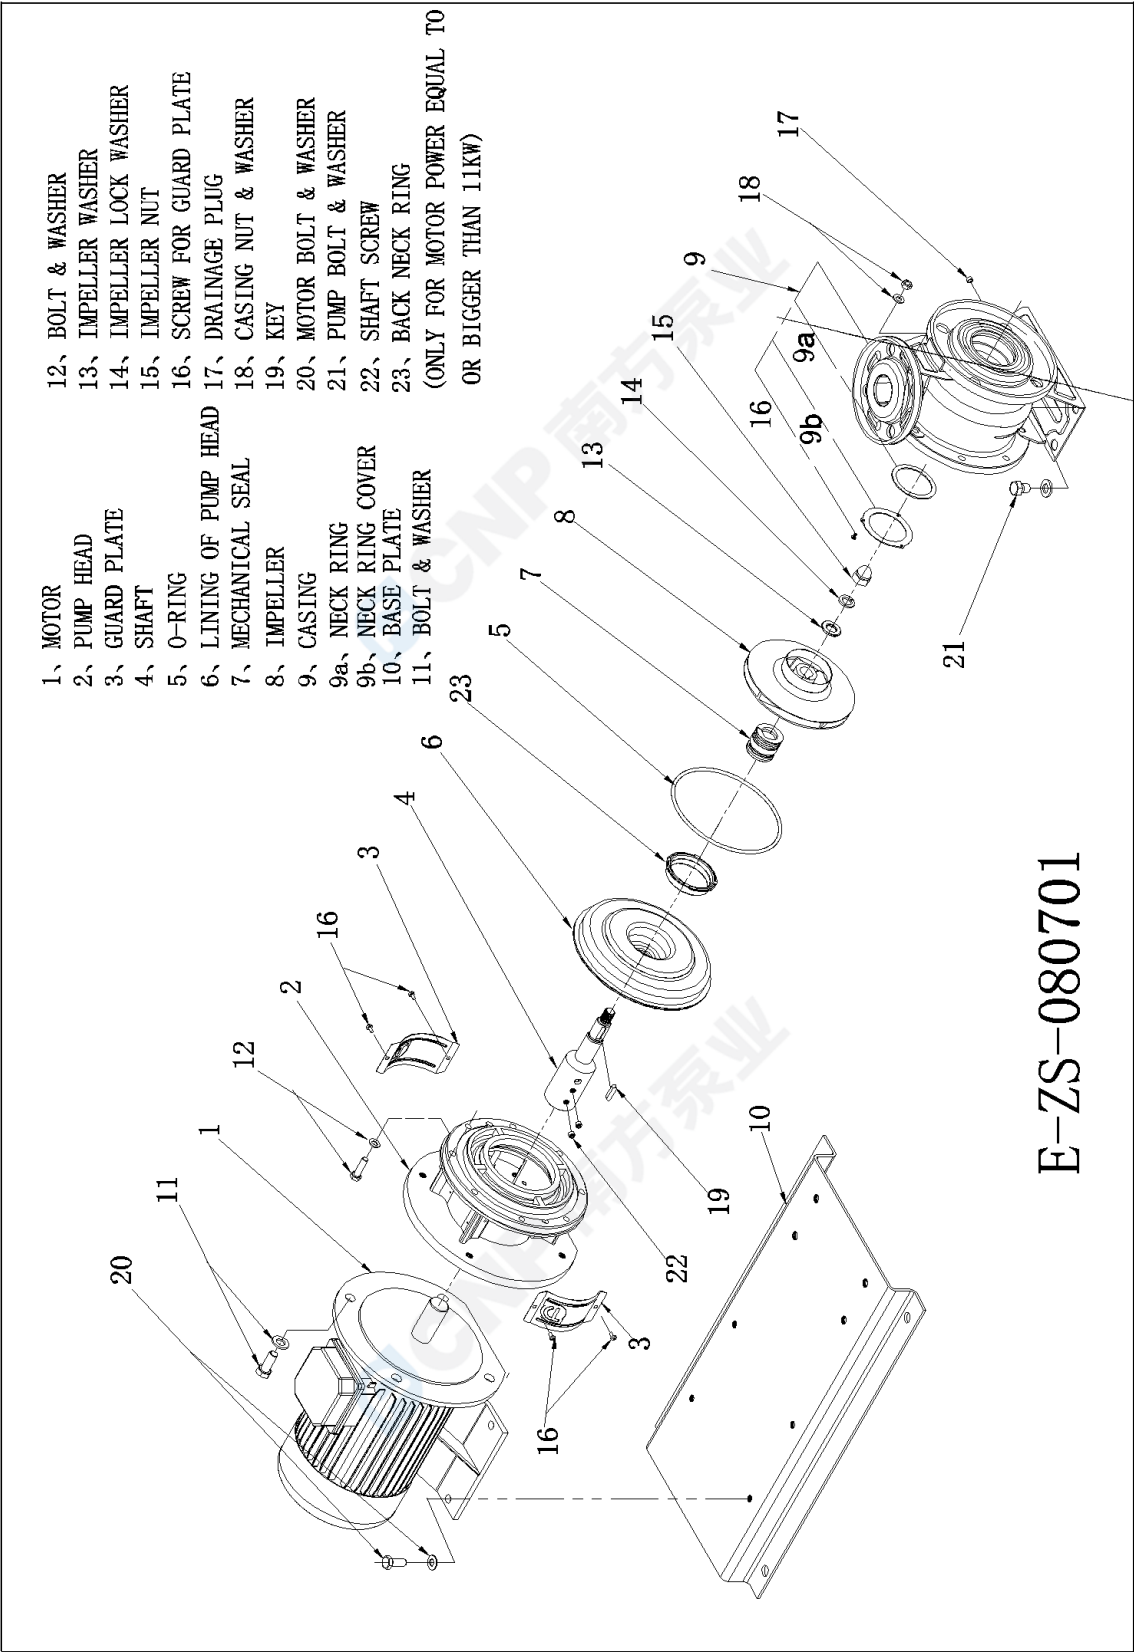

E-ZS-080701

 CNP 南方泵业	Physical picture ZS65-50-200/6 15.0	Manufacturer	Nanfang Pump Industry Co.,Ltd (CNP)
		Address	Hangzhou, Zhejiang, China
		Contact	86-571-88637351
		Date	2025/07/01
		Client Name	WEPKO
Project Name		Client Addr.	
Item NO		Contacts	
		Contact	



 CNP 南方泵业	Order Data ZS65-50-200/6 15.0	Manufacturer	Nanfang Pump Industry Co.,Ltd (CNP)
		Address	Hangzhou, Zhejiang, China
		Contact	86-571-88637351
		Date	2025/07/01
		Client Name	WEPKO
Project Name		Client Addr.	
Item NO		Contacts	
		Contact	

Pump model ZS65-50-200/6 15.0

Part NO. 1100042855

Product price

Quantity 1

Total price

Inquiry notes