

Receiver

From

Company
Reference
Address
Phone
Fax
E-mail

Item n° : Customer pos. no.:

60214795

Model :

DKLM 40-300/BQQE M

Pump data

MEI $\geq 0,6$

Pressure rating : 145 psi
Min. fluid temperature : -15 °C
Max. fluid temperature : 120 °C
Max. Ambient temperature : 40 °C

Requested data

Flow :
Head :
Fluid (%) :
Fluid Temperature : 20 °C
Density : 998,3 kg/m³
Kinematic viscosity : 1,005 mm²/s
Vapor pressure : 0,34 psi

Hydraulic data (duty point)

Flow :
Head :
NPSH :
Shaft power P2 :
Efficiency :

Materials



Pump body Cast iron 250 UNI ISO 185
Support Cast iron 250 UNI ISO 185
Impeller Technopolymer B
Mechanical seal Silicon carbide/Silicon carbide
O-Ring EPDM Rubber
Shaft with rotor Stainless Steel AISI 316

Motor data

Motor brand : DAB
Nominal power P2 : 1 X 0,1 kW
Rated speed : 1.420 1/min
Rated voltage : 1~ 230 V 50 Hz
Nominal current : 1 X 1,12 A
Degree of protection : IP 55

Curve tolerance according to ISO 9906

Number of working motors : 1

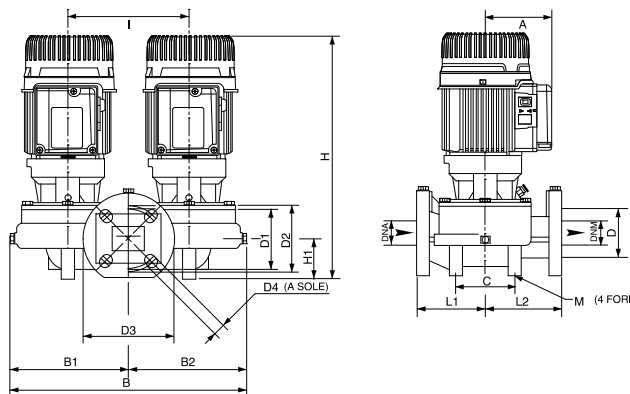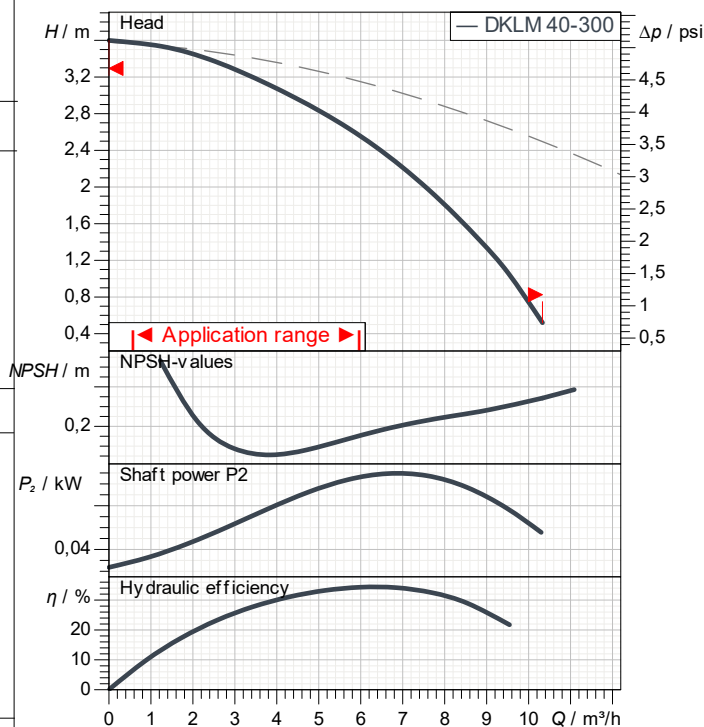

Weight : 38,2 kg

Dimensions in mm

A	110	D3	150	L1	125
B	437	D4	4 asole 18	L2	125
B1	217	DNA	40	M	4 fori 10
B2	220	DNM	40		
C	100	H	396		
D	80	H1	66		
D1	100	I	200		
D2	110	L	250		

Pump connection

Suction side : DN 40 / 145 psi
Discharge side : DN 40 / 145 psi

Receiver


From

Company
Reference
Address
Phone
Fax
E-mail

DKLM 40-300/BQQE M

Number of working motors : 1

Curve tolerance according to ISO 9906

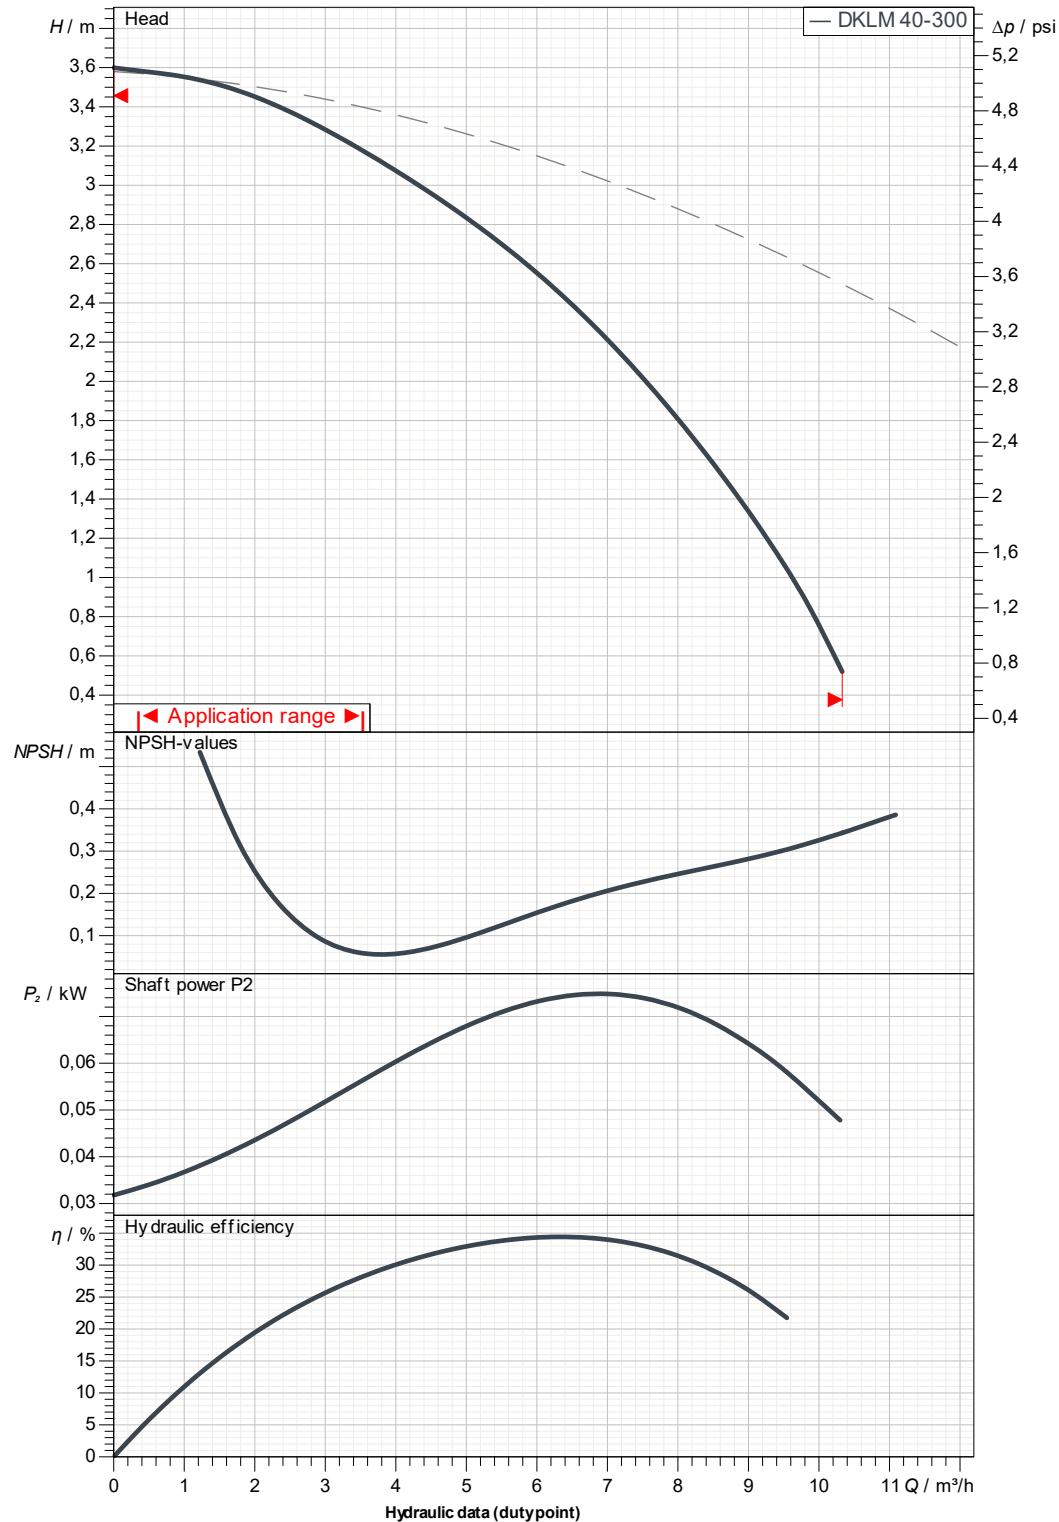

Suction side :

DN 40

145 psi

Discharge side :

DN 40

145 psi

Flow :

Head :

Rated speed :

1.420 1/min

MAIN_PROJECT_TITLE

BUSINESS_PROCESS_ID

OWNER_

ISSUE_DATE

2025-07-20



DIMENSIONAL DRAWING

2025-07-20

Page 3 / 3



DAB PUMPS S.p.A.
Via Marco Polo, 14 - 35035 Mestrino (PD), Italy
Tel. +39 049 5125000 - Fax +39 049 5125950
www.dabpumps.com

Receiver

From

Company
Reference
Address
Phone
Fax
E-mail

DKLM 40-300/BQQE M

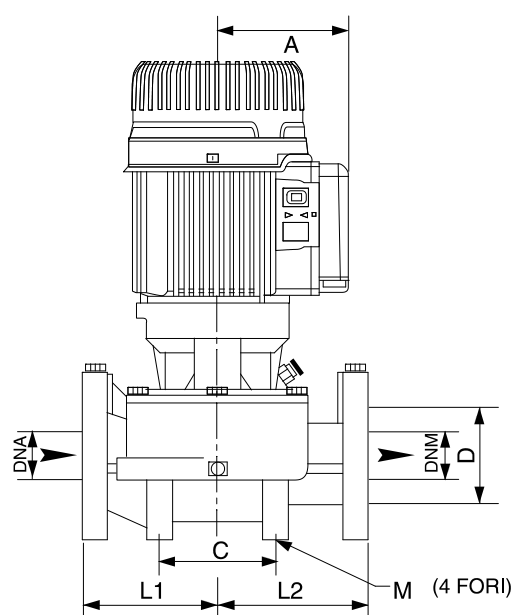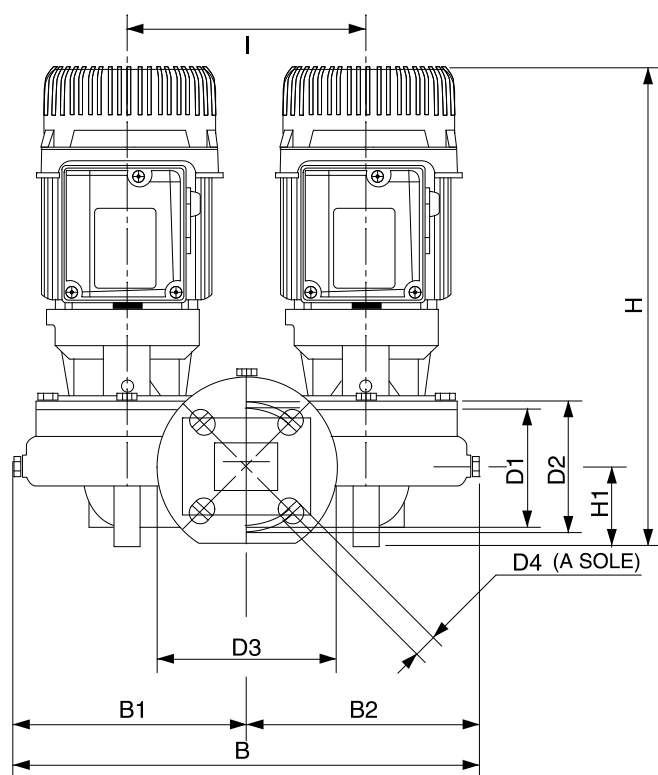

Dimensions in mm

Pump connection

1	A	110	DNM	40			
2	B	437	H	396			Suction
3	B1	217	H1	66			DN 40
4	B2	220	I	200			145 psi
5	C	100	L	250			
6	D	80	L1	125			
7	D1	100	L2	125			Discharge
8	D2	110	M	4 fori 10			DN 40
9	D3	150					145 psi
10	D4	4 asole 18X23					
11	DNA	40					

Project

Project ID

Created by

Created on

2025-07-20