


 CNP 南方泵业	Product Information TD100-35G/2	Manufacturer	Nanfang Pump Industry Co.,Ltd (CNP)
		Address	Hangzhou, Zhejiang, China
		Contact	86-571-88637351
		Date	2025/06/15
		Client Name	WEPKO
Project Name		Client Addr.	
Item NO		Contacts	Golsa
		Contact	

Part NO.	1100320002
Product Picture: (Note: Images may not be the same as the product)	Note
	Single-stage vertical pipeline circulating pump, the pump inlet and outlet are on the same line at the bottom of the pump, and the product is designed to be pulled out of the top in the form of disassembly, which can be used to repair the pump without affecting the pipeline system. Compact, easy to maintain, low noise, optional cast iron or stainless steel impeller.
Technology Pump rotator speed 2900 Pump version Extension shaft Material Pump body HT200 Impeller HT200 Rubber code NBR Installation Connection Code F Maximum Operation Pressure 12bar Medium Medium Temperature -15~110°C Structure dimension Inlet & outlet size types DN Inlet & Outlet Diameter 100 Rotation Direction Clockwise rotation viewed from motor end Exploled view TDexploded view Motor Number of Motor Phase Three Phase Protection Class IP55 Insulation Class F Motor Power(kW) 15KW Power Frequency(Hz) 50Hz Rated Voltage (V) 380V Energy Efficiency Level IE3 Seal Mechanical Seal TD-28/BSE4 Others Weight (kg) 205	


	Performance Curve TD100-35G/2	Manufacturer	Nanfang Pump Industry Co.,Ltd (CNP)
		Address	Hangzhou, Zhejiang, China
		Contact	86-571-88637351
		Date	2025/06/15
Project Name		Client Name	WEPKO
Item NO		Client Addr.	
		Contacts	Golsa
		Contact	

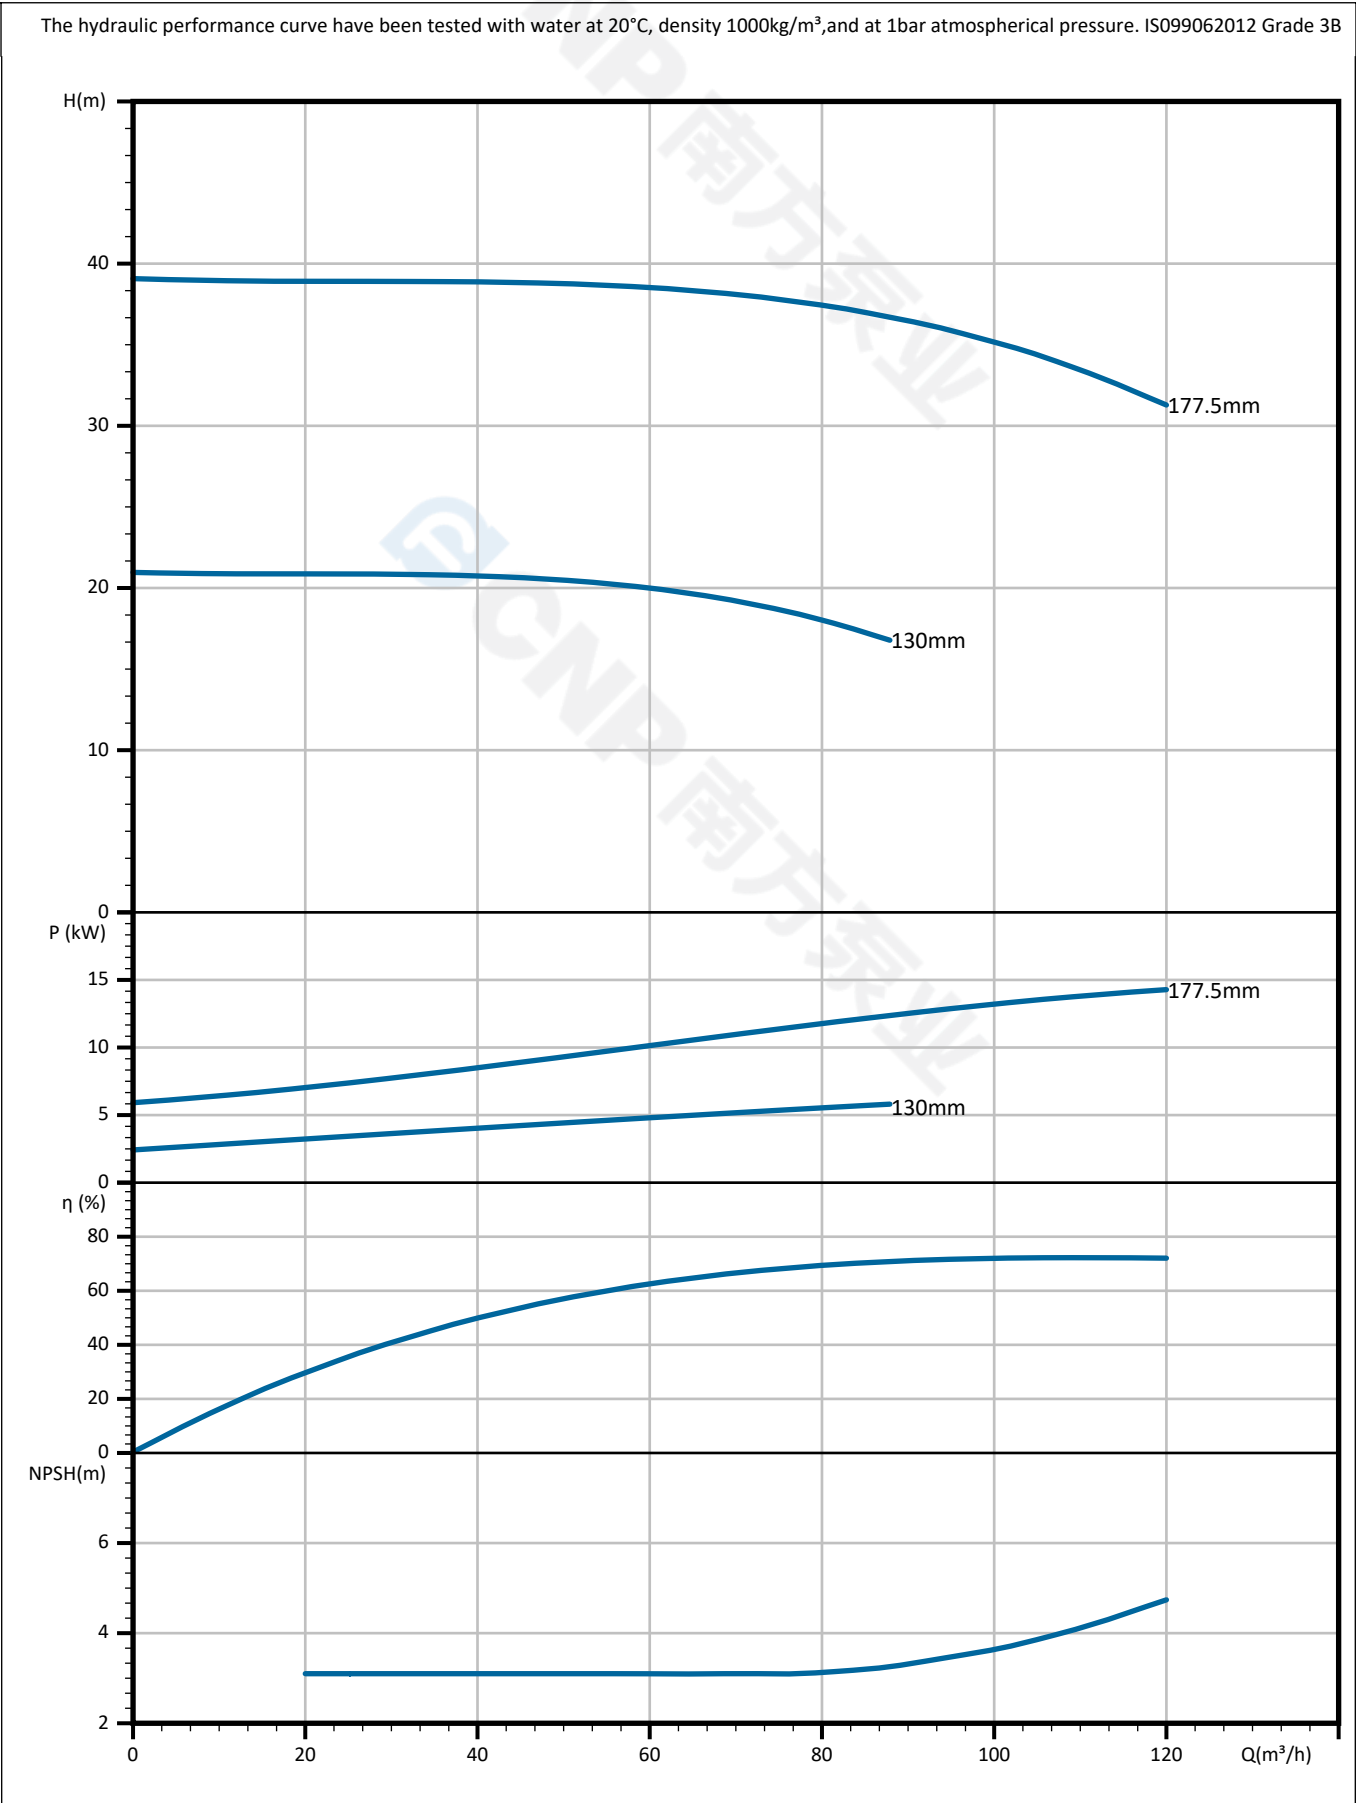


	Pump Technical Parameters TD100-35G/2	Manufacturer	Nanfang Pump Industry Co.,Ltd (CNP)
		Address	Hangzhou, Zhejiang, China
		Contact	86-571-88637351
		Date	2025/06/15
Project Name		Client Name	WEPKO
		Client Addr.	
Item NO		Contacts	Golsa
		Contact	

Rated parameters		
Pump model	TD100-35G/2	
Part NO.	1100320002	
Rated flow	100 m³/h	
Rated head	35 m	
Rated efficiency	72 (%)	
Power (kW)	13.2 kW	
NPSHr (m)	4	
Speed (rpm)	2900	
Max impeller diameter (mm)	178	
Medium		
Pumped medium	water	
Working temperature (°C)	20	
Medium density (kg/m³)	1000	
Viscosity (mm²/s)	1	

 CNP 南方泵业	Dimension Drawing TD100-35G/2	Manufacturer	Nanfeng Pump Industry Co.,Ltd (CNP)
		Address	Hangzhou, Zhejiang, China
		Contact	86-571-88637351
		Date	2025/06/15
Project Name		Client Name	WEPKO
Item NO		Client Addr.	
		Contacts	Golsa
		Contact	

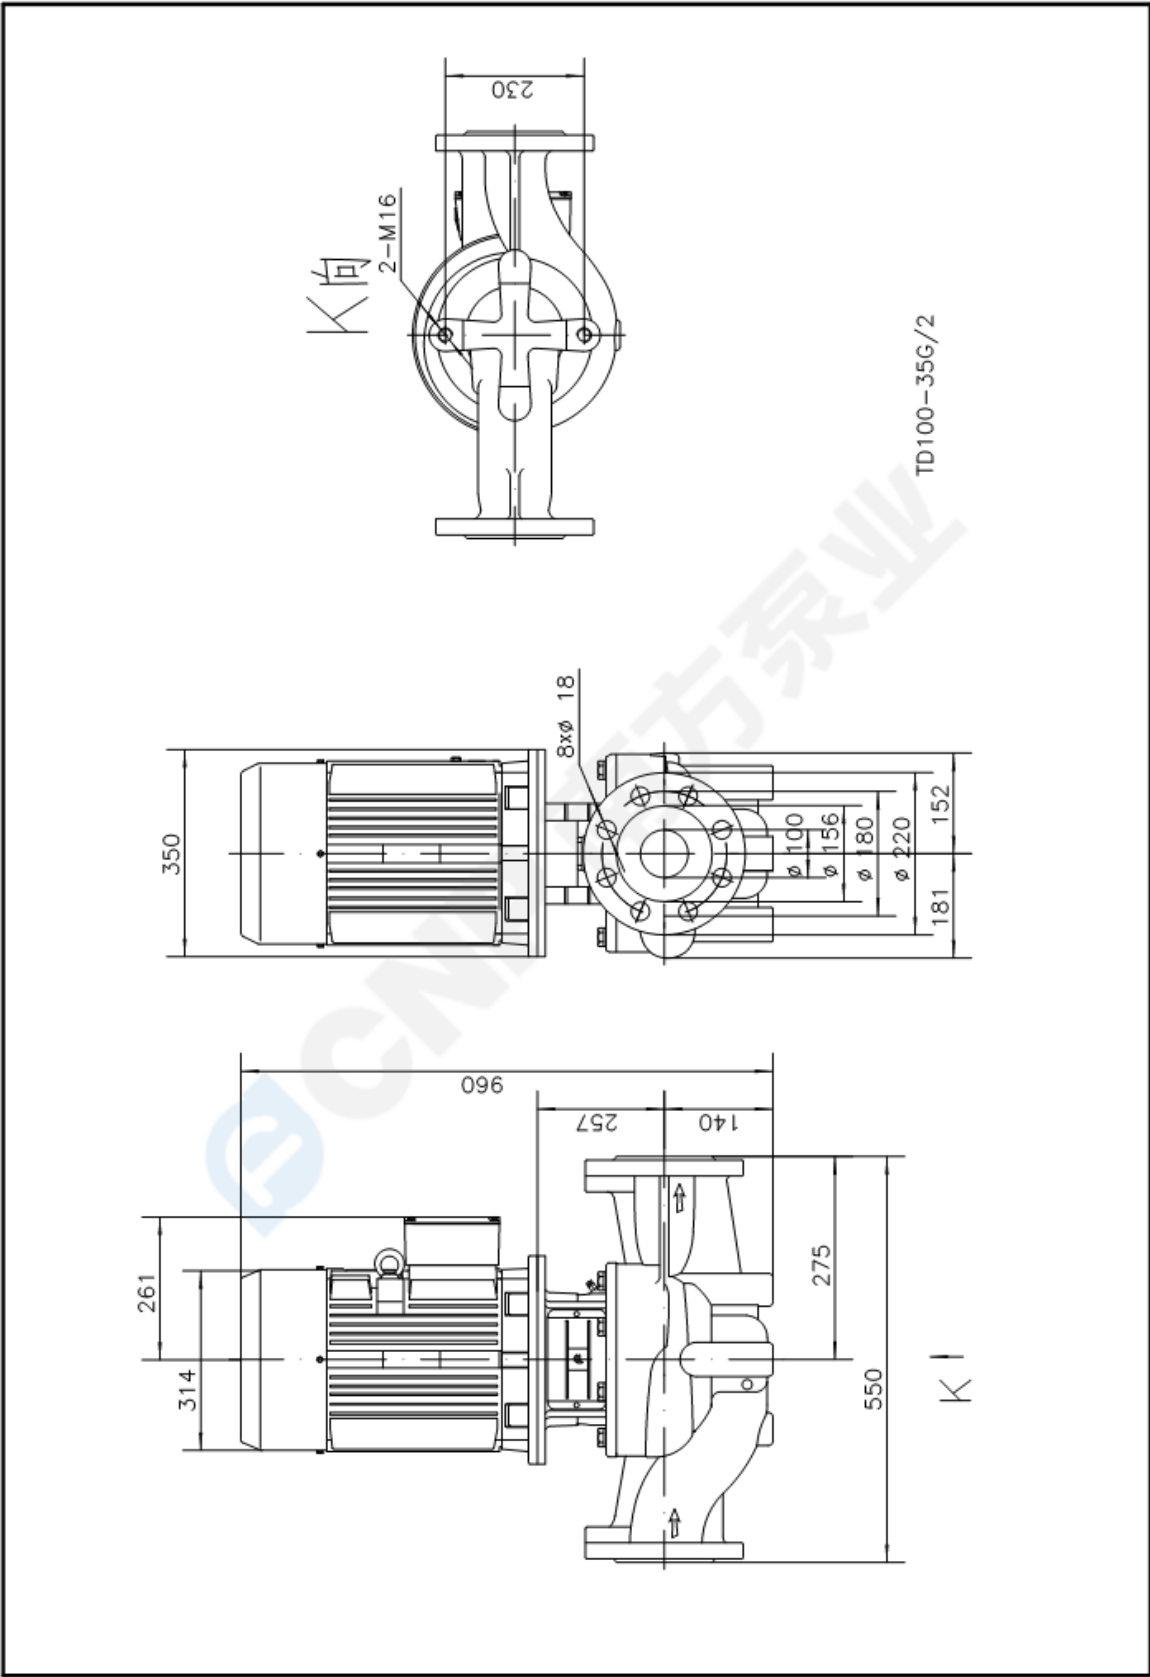

 CNP 南方泵业	Explosed view TD100-35G/2	Manufacturer	Nanfeng Pump Industry Co.,Ltd (CNP)
		Address	Hangzhou, Zhejiang, China
		Contact	86-571-88637351
		Date	2025/06/15
Project Name		Client Name	WEPKO
Item NO		Client Addr.	
		Contacts	Golsa
		Contact	

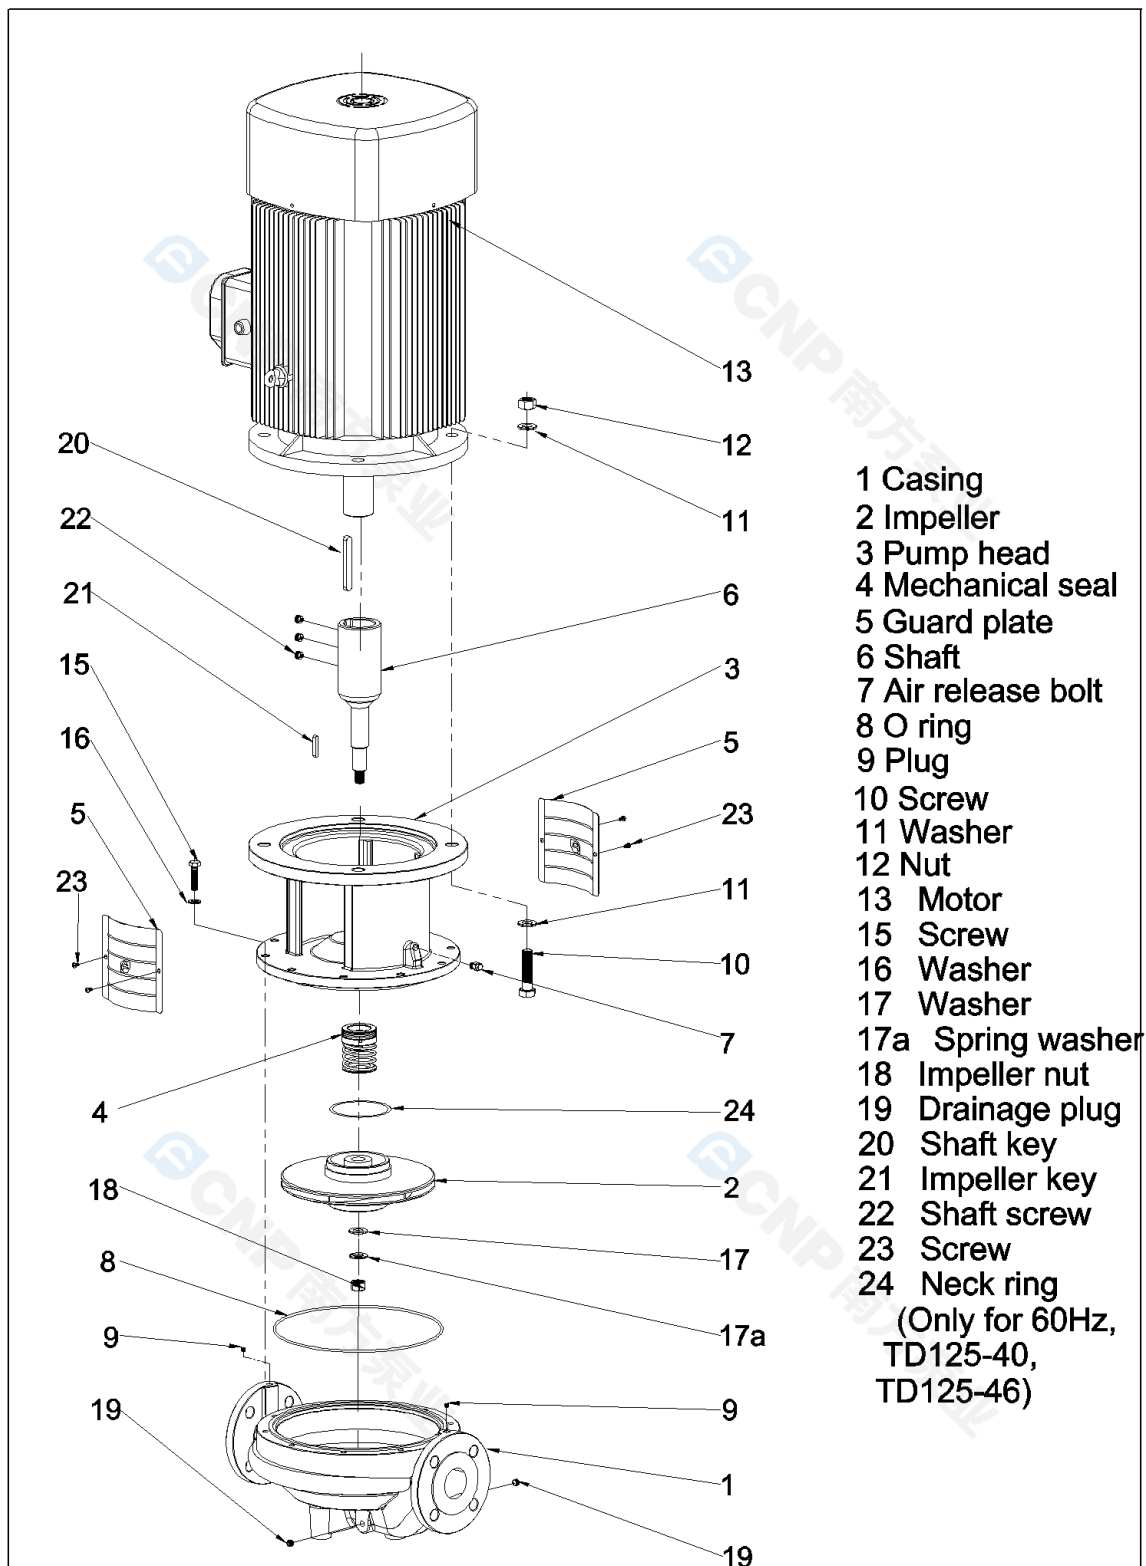

- 1 Casing
 - 2 Impeller
 - 3 Pump head
 - 4 Mechanical seal
 - 5 Guard plate
 - 6 Shaft
 - 7 Air release bolt
 - 8 O ring
 - 9 Plug
 - 10 Screw
 - 11 Washer
 - 12 Nut
 - 13 Motor
 - 15 Screw
 - 16 Washer
 - 17 Washer
 - 17a Spring washer
 - 18 Impeller nut
 - 19 Drainage plug
 - 20 Shaft key
 - 21 Impeller key
 - 22 Shaft screw
 - 23 Screw
 - 24 Neck ring
- (Only for 60Hz,
TD125-40,
TD125-46)

E-TD32~TD150-080701 Extension shaft

 CNP 南方泵业	Physical picture TD100-35G/2	Manufacturer	Nanfeng Pump Industry Co.,Ltd (CNP)
		Address	Hangzhou, Zhejiang, China
		Contact	86-571-88637351
		Date	2025/06/15
Project Name		Client Name	WEPKO
		Client Addr.	
Item NO		Contacts	Golsa
		Contact	



 CNP 南方泵业	Order Data TD100-35G/2	Manufacturer	Nanfang Pump Industry Co.,Ltd (CNP)
		Address	Hangzhou, Zhejiang, China
		Contact	86-571-88637351
		Date	2025/06/15
		Client Name	WEPKO
Project Name		Client Addr.	
Item NO		Contacts	Golsa
		Contact	

Pump model TD100-35G/2
Part NO. 1100320002
Product price
Quantity 1
Total price

Inquiry notes